


Series 6100 - 6101 - 6110 - Guided compact cylinder

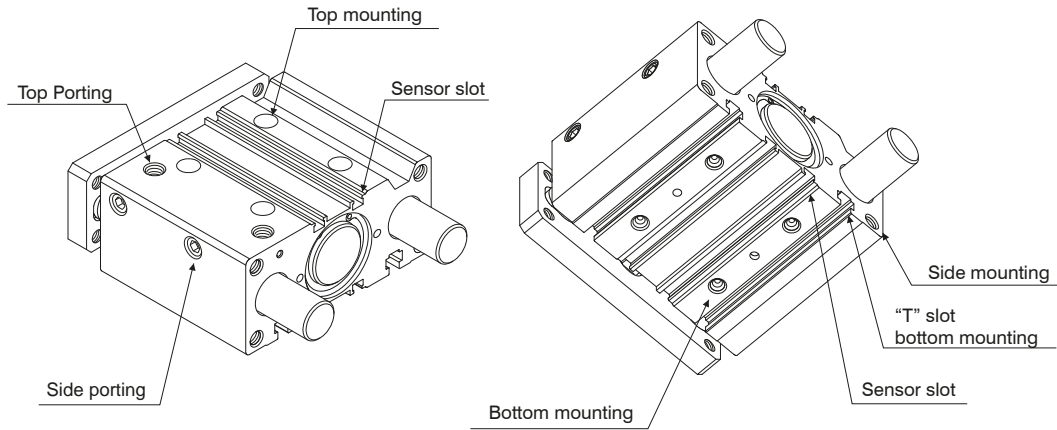

These guided compact cylinders, characterised by reduced overall dimensions, can be used for the compression, conveyance and manipulation of objects in many industrial sectors; similarly they can also be used in pushing, lifting and stopping applications.

These cylinders are available in sizes 32mm to 63 mm diameter, and comprise a single compact cylinder with integral guide rods, making it a true guide cylinder designed with installation flexibility and space saving in mind.

The rod guide is available in two styles:

Self-lubricating bronze bushes - useful for absorbing lateral loads and forces, especially as a stopper.

Bearing bushes - guaranteeing high precision and uniform movement with low friction characteristics, useful with mis-aligned loads.

Guided compact cylinders are ideal for use in applications requiring a combination of reduced dimensions and anti-rotation features. Mounting can be achieved on three sides through holes or "T" slots.

Adjustable mounting holes in the front plate ensure safe and accurate assembly. Pneumatic connections can be made to either lateral or top ports (lateral ports plugged on standard units).

When sensors are required, there are special slots in the barrel extrusion where 1580 series miniaturised sensors are easily fitted.

► Guided compact cylinder



Ordering code

6100.Ø.stroke. . . .

12	}	Side supply ports closed
16		
20	}	L = Top supply ports closed
25		
32	}	B = Control unit with bronze bush
40		
50	}	C = Control unit with bearing bush
63		

Construction characteristics

Body	anodised aluminium
Guide rods	C43 chromed steel (control unit with bronze bush) tempered and chromed steel (control unit with bearing bush)
Piston	aluminium
Piston rod	stainless steel (for bores Ø12, Ø16, Ø20, Ø25) C43 chromed steel (for bores Ø32, Ø40, Ø50, Ø63)
Rods bushing	bronze or bearing bushing
End cap	anodised aluminium
Piston seal	oil resistant NBR rubber
Piston rod seal	PUR (NBR 12-16)
Wipers	PUR
Plate	nickel plated steel

Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	max. 10 bar
Working temperature	-5°C - +70°C
Cushioning	elastic bumper on both ends









Standard stroke

Bore	Stroke											
	10	20	25	30	40	50	75	100	125	150	175	200
Ø12	●	●		●	●	●	●	●				
Ø16	●	●		●	●	●	●	●				
Ø20		●		●	●	●	●	●	●	●	●	●
Ø25		●		●	●	●	●	●	●	●	●	●
Ø32			●			●	●	●	●	●	●	●
Ø40			●			●	●	●	●	●	●	●
Ø50			●			●	●	●	●	●	●	●
Ø63			●			●	●	●	●	●	●	●

Intermediate strokes can be obtained using spacers with defined length (5, 10, 15, 20 mm).

Example: It is possible to obtain a **6100.32.45.B** cylinder from a **6100.32.50.B** cylinder by inserting a spacer with length of 5 mm. The intermediate strokes manufactured without the use of spacers are considered special executions.

Overall dimensions

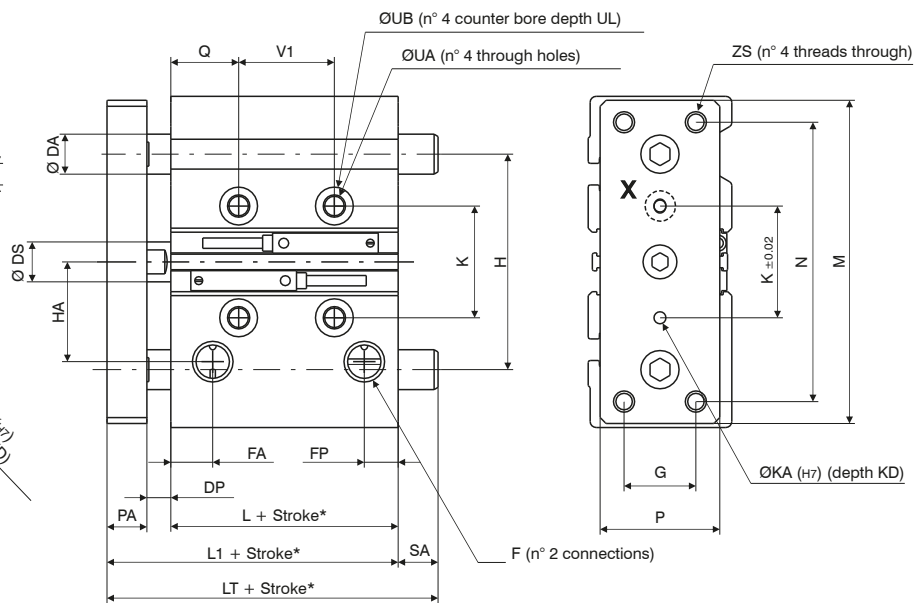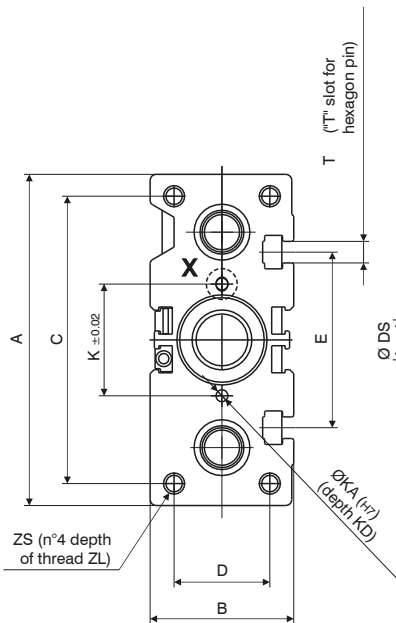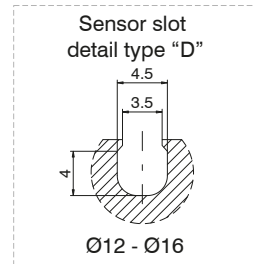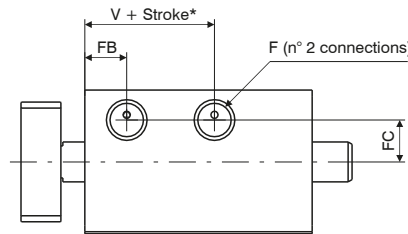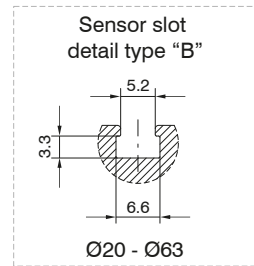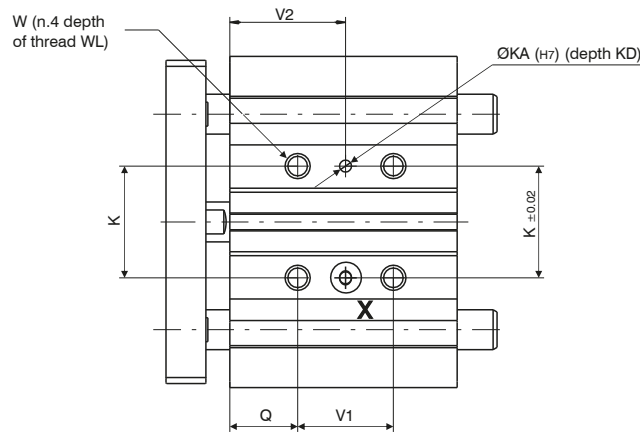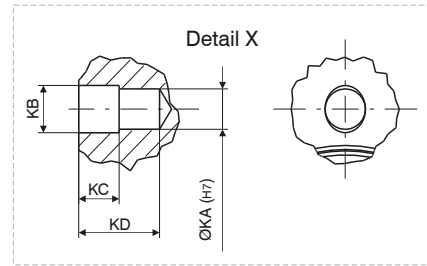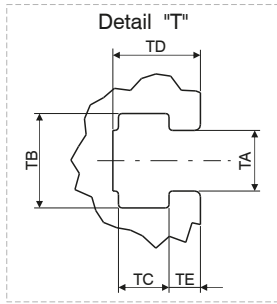

*Dimensions only refer to the "standard stroke"



Overall dimensions

Bore		Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63
Table of dimensions									
A		58	64	83	93	112	120	148	162
B		26	30	36	42	48	54	64	78
C		40	42	72	82	98	106	130	142
D		18	22	24	30	34	40	46	58
Control unit with bronze bushes	DA	8	10	12	16	20	20	25	25
	Control unit with bearing bushes	6	8	10	14	16	16	20	20
DP		2	2	5,5	5,5	9,5	10	13	13
DS		6	8	10	12	16	16	20	20
E		/	/	44	50	63	72	92	110
F		M5	M5	G1/8"	G1/8"	G1/8"	G1/8"	G1/4"	G1/4"
FA		11	11	11	12	13	13	13	14
FB		11	11	11	12	13	13	13	14
FC		8,5	10	10,5	13,5	15	18	21,5	28
FP		15	17	9	10,5	9,5	11	11	12,5
G		14	16	18	26	30	30	40	50
H		41,5	46	54	64	78	86	110	124
HA		19,5	23	25	28,5	34	38	47	55
K		23	24	28	34	42	50	66	80
KA		/	/	3	4	4	4	5	5
KB		/	/	3,5	4,5	4,5	4,5	6	6
KC		/	/	3	3	3	3	4	4
KD		/	/	6	6	6	6	8	8
L		29	31	38	38,5	38,5	44	44	49
Control unit with bronze bushes	L1	39	43	53,5	54	60	66	72	77
	Control unit with bearing bushes	39	43	53,5	54	97	97	106,5	106,5
Control unit with bearing bushes	LT	57	64	84,5	85	102	102	118	118
	See table 1								
M		56	62	81	91	110	118	146	158
N		48	52	70	78	96	104	130	130
PA		8	10	10	10	12	12	15	15
P		22	25	30	38	44	44	60	70
Q		5	5	17,5	17,5	21,5	22	24	24
Control unit with bronze bushes	SA	/	/	/	/	37	31	34,5	29,5
		Control unit with bearing bushes	18	21	31	31	42	36	46
See table 1									
T		/	/	M5	M5	M6	M6	M8	M10
TA		/	/	5,4	5,4	6,5	6,5	8,5	11
TB		/	/	8,4	8,4	10,5	10,5	13,5	17,8
TC		/	/	4,5	4,5	5,5	5,5	7,5	10
TD		/	/	7,8	8,2	9,5	11	13,5	18,5
TE		/	/	2,8	3	3,5	4	4,5	7
UA		4,3	4,3	5,6	5,6	6,6	6,6	8,6	8,6
UB		8	8	9,5	9,5	11	11	14	14
UL		4,5	4,5	5,5	5,5	7,5	7,5	9	9
V		14	14	13	13	7,5	13	9	14
V1		See table 2							
V2		See table 2							
W		M5	M5	M6x1	M6x1	M8x1,25	M8x1,25	M10x1,5	M10x1,5
WL		10	10	12	12	16	16	20	20
Z		M4	M5	M5x0,8	M6x1	M8x1,25	M8x1,25	M10x1,5	M10x1,5
ZL		9	11	13	15	20	20	22	22

Control unit with bearing bushes	Table 1	LT			SA		
	Bore	stroke ≤ 30	30 < stroke ≤ 100	100 < stroke ≤ 200	stroke ≤ 30	30 < stroke ≤ 100	100 < stroke ≤ 200
Ø12		39	53	53	/	14	/
Ø16		43	64	64	/	21	/
Ø20		47	72	72	/	18,5	49
Ø25		49	77	77	/	23	48
		stroke < 50	50 ≤ stroke ≤ 100	100 < stroke ≤ 200	stroke < 50	50 ≤ stroke ≤ 100	100 < stroke ≤ 200
Ø32		/	87	117	/	27	57
Ø40		/			/	21	51
Ø50		/	92	127	/	20	55
Ø63		/			/	15	50

Control unit with bearing bushes	Table 2	V1			V2		
	Bore	stroke ≤ 30	30 < stroke ≤ 100	100 < stroke ≤ 200	stroke ≤ 30	30 < stroke ≤ 100	100 < stroke ≤ 200
Ø12		4 + stroke			/	/	/
Ø16					/	/	/
Ø20		24	44	120	29,5	39,5	77,5
Ø25		stroke ≤ 25			stroke ≤ 25		
Ø32							
Ø40		24	48	124	34	46	84
Ø50		stroke ≤ 25			stroke ≤ 25		
Ø63							



Weight - Cylinder force - kinetic energy

Stroke	Bore															
	Ø12		Ø16		Ø20		Ø25		Ø32		Ø40		Ø50		Ø63	
	Control unit with bronze bushes															
10	240		330		/		/		/		/		/		/	
20	280		380		670		950		/		/		/		/	
25	/		/		/		/		1690		1950		3360		4180	
30	310		430		750		1050		/		/		/		/	
40	350		480		830		1160		/		/		/		/	
50	390		530		910		1270		2070		2370		4000		4940	
75	500		680		1170		1650		2470		2830		4730		5780	
100	5903		800		1370		1920		2850		3250		5370		6540	
125	/		/		1570		2190		3240		3680		6010		7290	
150	/		/		1760		2470		3620		4100		6650		8050	
175	/		/		1960		2740		4000		4530		7290		8800	
200	/		/		2160		3010		4380		4950		7930		9560	
Stroke	Moving parts															
10	100		155		/		/		/		/		/		/	
20	108		170		330		520		/		/		/		/	
25	/		/		/		/		1070		1140		2150		2500	
30	116		185		350		560		/		/		/		/	
40	124		200		380		600		/		/		/		/	
50	132		215		400		640		1230		1300		2400		2750	
75	152		250		520		840		1420		1490		2750		3090	
100	172		285		580		950		1580		1650		3000		3350	
125	/		/		640		1050		1740		1810		3260		3600	
150	/		/		700		1150		1910		1980		3510		3860	
175	/		/		760		1250		2070		2140		3760		4110	
200	/		/		820		1350		2230		2300		4020		4360	
Stroke	Control unit with bearing bushes															
10	240		340		/		/		/		/		/		/	
20	270		390		700		980		/		/		/		/	
25	/		/		/		/		1540		1790		3110		3930	
30	300		430		770		1070		/		/		/		/	
40	350		510		890		1250		/		/		/		/	
50	390		560		970		1340		1850		2150		3660		4590	
75	470		670		1140		1570		2300		2640		4410		5460	
100	560		790		1310		1810		2620		3000		4960		6120	
125	/		/		1520		2080		2990		3420		5600		6880	
150	/		/		1690		2310		3310		3780		6150		7540	
175	/		/		1870		2540		3620		4140		6700		8210	
200	/		/		2040		2770		3940		4500		7250		8870	
Stroke	Moving parts															
10	95		145		/		/		/		/		/		/	
20	100		153		310		490		/		/		/		/	
25	/		/		/		/		820		890		1770		2110	
30	105		161		330		520		/		/		/		/	
40	110		169		370		580		/		/		/		/	
50	120		177		390		610		940		1010		1950		2300	
75	145		197		440		690		1110		1180		2240		2590	
100	170		217		480		760		1230		1300		2430		2770	
125	/		/		560		880		1410		1480		2710		3050	
150	/		/		600		950		1530		1600		2890		3240	
175	/		/		650		1020		1650		1720		3080		3420	
200	/		/		700		1100		1770		1830		3270		3610	
Working pressure	Cylinder theoretic force (N)															
2 bar	23	17	40	30	63	47	98	76	161	121	251	211	393	330	623	561
3 bar	34	26	60	45	94	71	147	113	241	181	377	317	589	495	935	841
4 bar	45	34	80	60	126	94	196	151	322	241	503	422	785	660	1247	1121
5 bar	57	43	101	76	157	118	246	189	402	302	629	528	982	825	1559	1402
6 bar	68	51	121	91	188	142	295	227	482	362	754	634	1178	989	1870	1682
7 bar	79	60	141	106	220	165	344	265	563	422	880	739	1374	1154	2182	1962
8 bar	90	68	161	121	251	189	393	302	643	482	1006	845	1570	1319	2494	2242
9 bar	102	77	181	136	283	212	442	340	724	543	1131	950	1767	1484	2805	2523
10 bar	113	85	201	151	314	236	491	378	804	603	1257	1056	1963	1649	3117	2803
Piston area (mm ²)	out	in	out	in	out	in	out	in	out	in	out	in	out	in	out	in
	113	85	201	151	314	236	491	378	804	603	1257	1056	1963	1649	3117	2803
	Maximum permissible Momentum															
J	0,08		0,09		0,11		0,18		0,29		0,52		0,91		1,54	

How to calculate the Momentum: $E_c = \frac{1}{2} m V^2$ (J)

m = Total moving mass: weight of driven object added to weight of cylinder moving parts (kg)




V = max. speed: equal to average speed + 40% (m/sec)

Operating criteria

Permissible lateral load (applied on overall plate)

Version	Stroke	Bore							
		Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63
		Permissible lateral load (N)*							
Control unit with bronze bushes	10	30	48						
	20	23	37	49	69				
	25					203	203	296	296
	30	19	30	43	60				
	40	16	25	38	54				
	50	14	20	35	49	164	164	245	245
	75	12	18	87	116	182	182	273	273
	100	10	15	75	100	159	159	241	241
	125			66	88	142	142	216	216
	150			59	79	127	127	195	195
	175			54	71	116	116	179	179
	200			49	65	106	106	164	164
	Control unit with bearing bushes	10	20	35					
20		15	28	58	69				
25						191	190	208	206
30		13	22	48	68				
40		11	18	101	132				
50		10	16	90	118	157	157	173	171
75		8	14	70	93	164	163	223	221
100		6	11	58	77	144	144	199	196
125				62	80	203	203	264	262
150				54	70	186	185	242	240
175				48	62	171	171	224	221
200				43	55	158	158	207	205
		Recommended torque moments (Nm)							
Control unit with bronze bushes	10	0,40	0,70						
	20	0,35	0,65	1,1	1,8				
	25					6,4	7,0	13,0	14,7
	30	0,28	0,48	0,9	1,6				
	40	0,25	0,45	0,8	1,4				
	50	0,21	0,39	0,8	1,3	5,1	5,7	10,8	12,1
	75	0,42	0,68	1,9	3,0	5,7	6,3	12,0	13,5
	100	0,40	0,60	1,6	2,6	5,0	5,5	10,6	11,9
	125			1,4	2,3	4,4	4,9	9,5	10,7
	150			1,3	2,0	4,0	4,4	8,6	9,7
	175			1,2	1,8	3,6	4,0	7,9	8,9
	200			1,1	1,7	3,3	3,7	7,2	8,2
	Control unit with bearing bushes	10	0,62	0,70					
20		0,41	0,65	1,3	2,1				
25						6,0	6,6	9,2	10,2
30		0,33	0,48	1,0	1,8				
40		0,30	0,45	2,2	3,4				
50		0,48	0,39	1,9	3,0	4,9	5,4	7,6	8,5
75		0,38	0,68	1,5	2,4	5,1	5,6	9,8	11,0
100		0,32	0,60	1,3	2,0	4,5	5,0	8,7	9,7
125				1,3	2,1	6,3	7,0	11,6	13,0
150				1,2	1,8	5,8	6,4	10,7	11,9
175				1,0	1,6	5,3	5,9	9,8	11,0
200				0,9	1,4	4,9	5,4	9,1	10,2


*(Applied on overall plate)



3
PNEUMATIC ACTUATION


Operating criteria

Stopper device applications

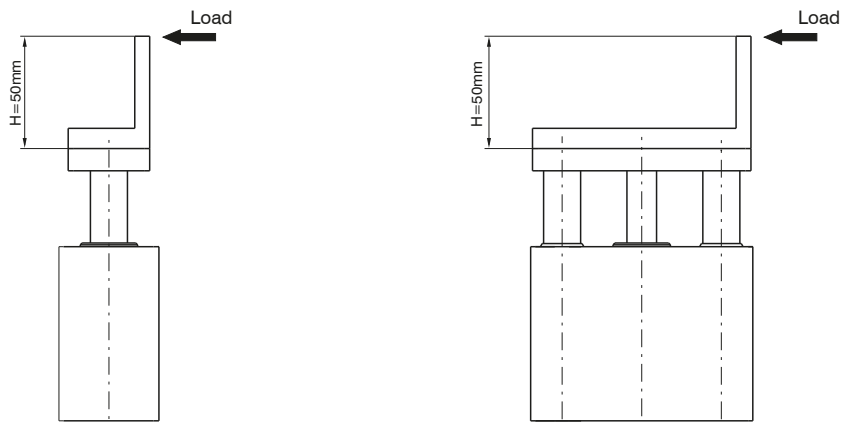


Control unit with
bronze bushes

ATTENTION: if H>50 mm use larger bore

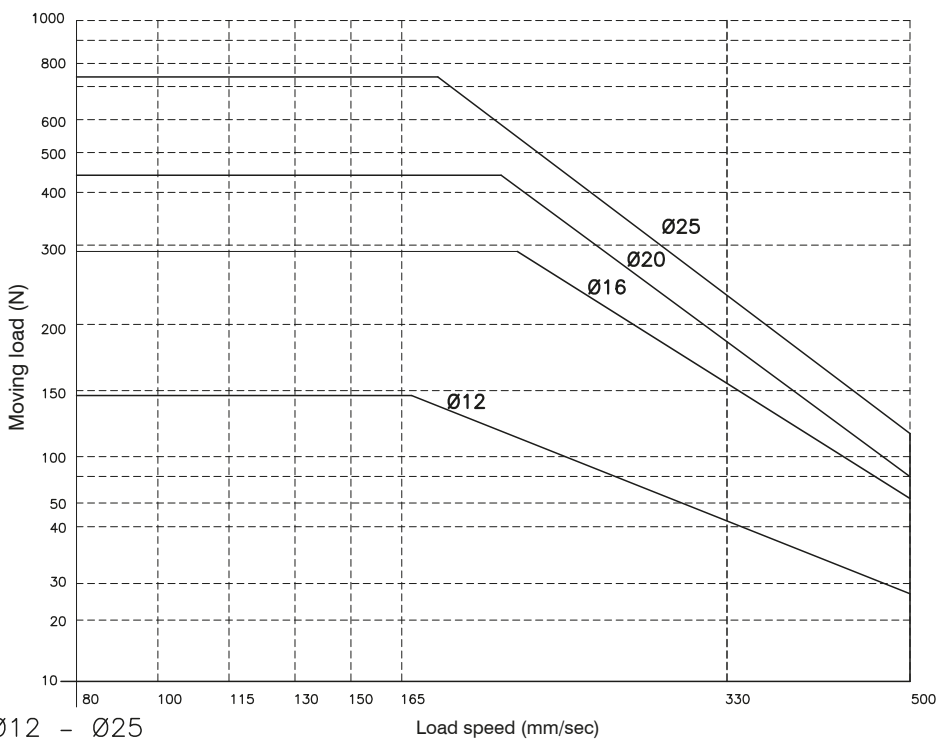

Ø12 - Ø25


ATTENTION: use with stroke £ 30 mm

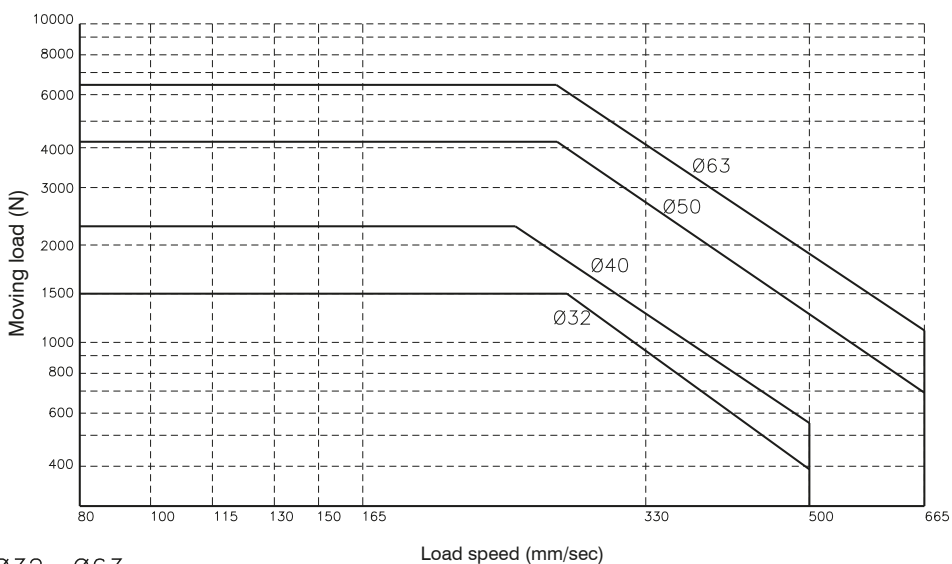


Ø32 - Ø63

ATTENTION: use with stroke £ 50 mm

Operating criteria
Handling applications

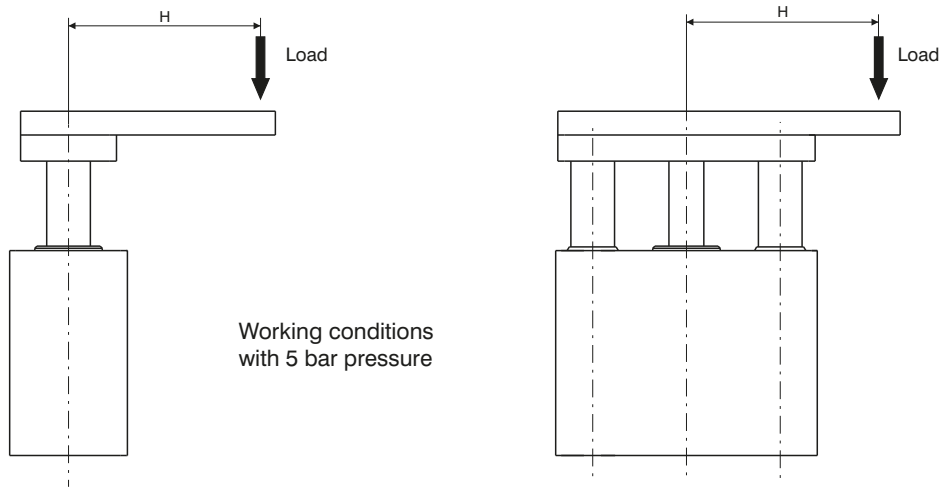


Control unit with bronze bushes

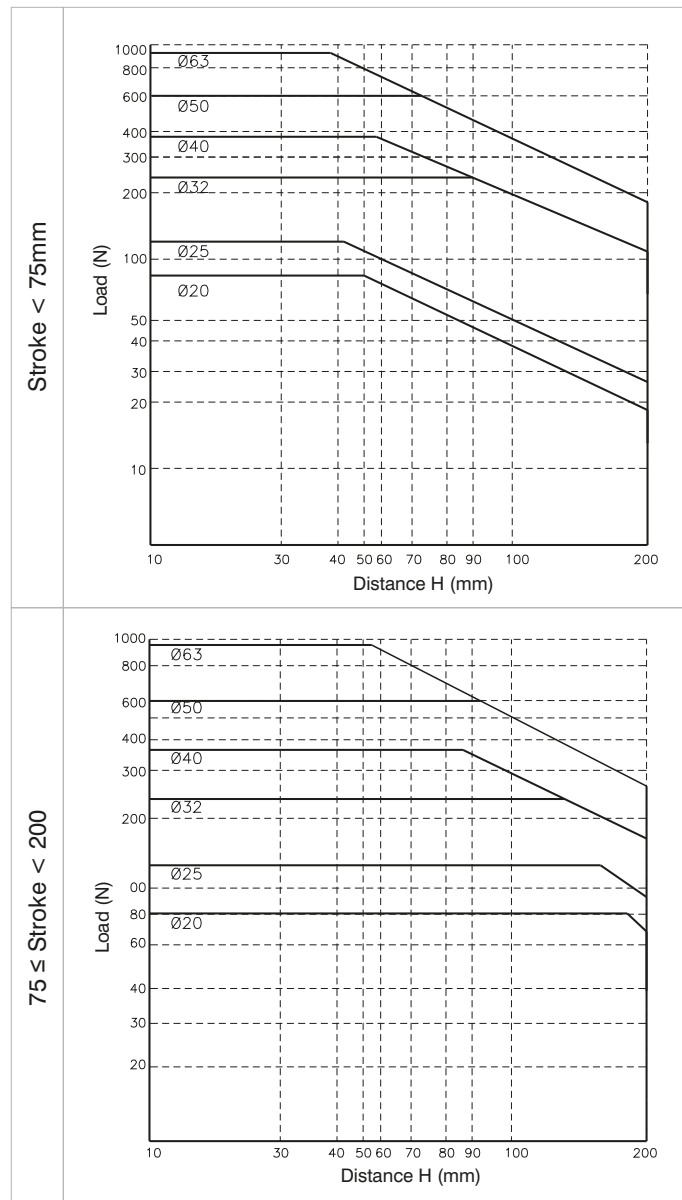


Operating criteria

Handling applications

Control unit with bearing bushes

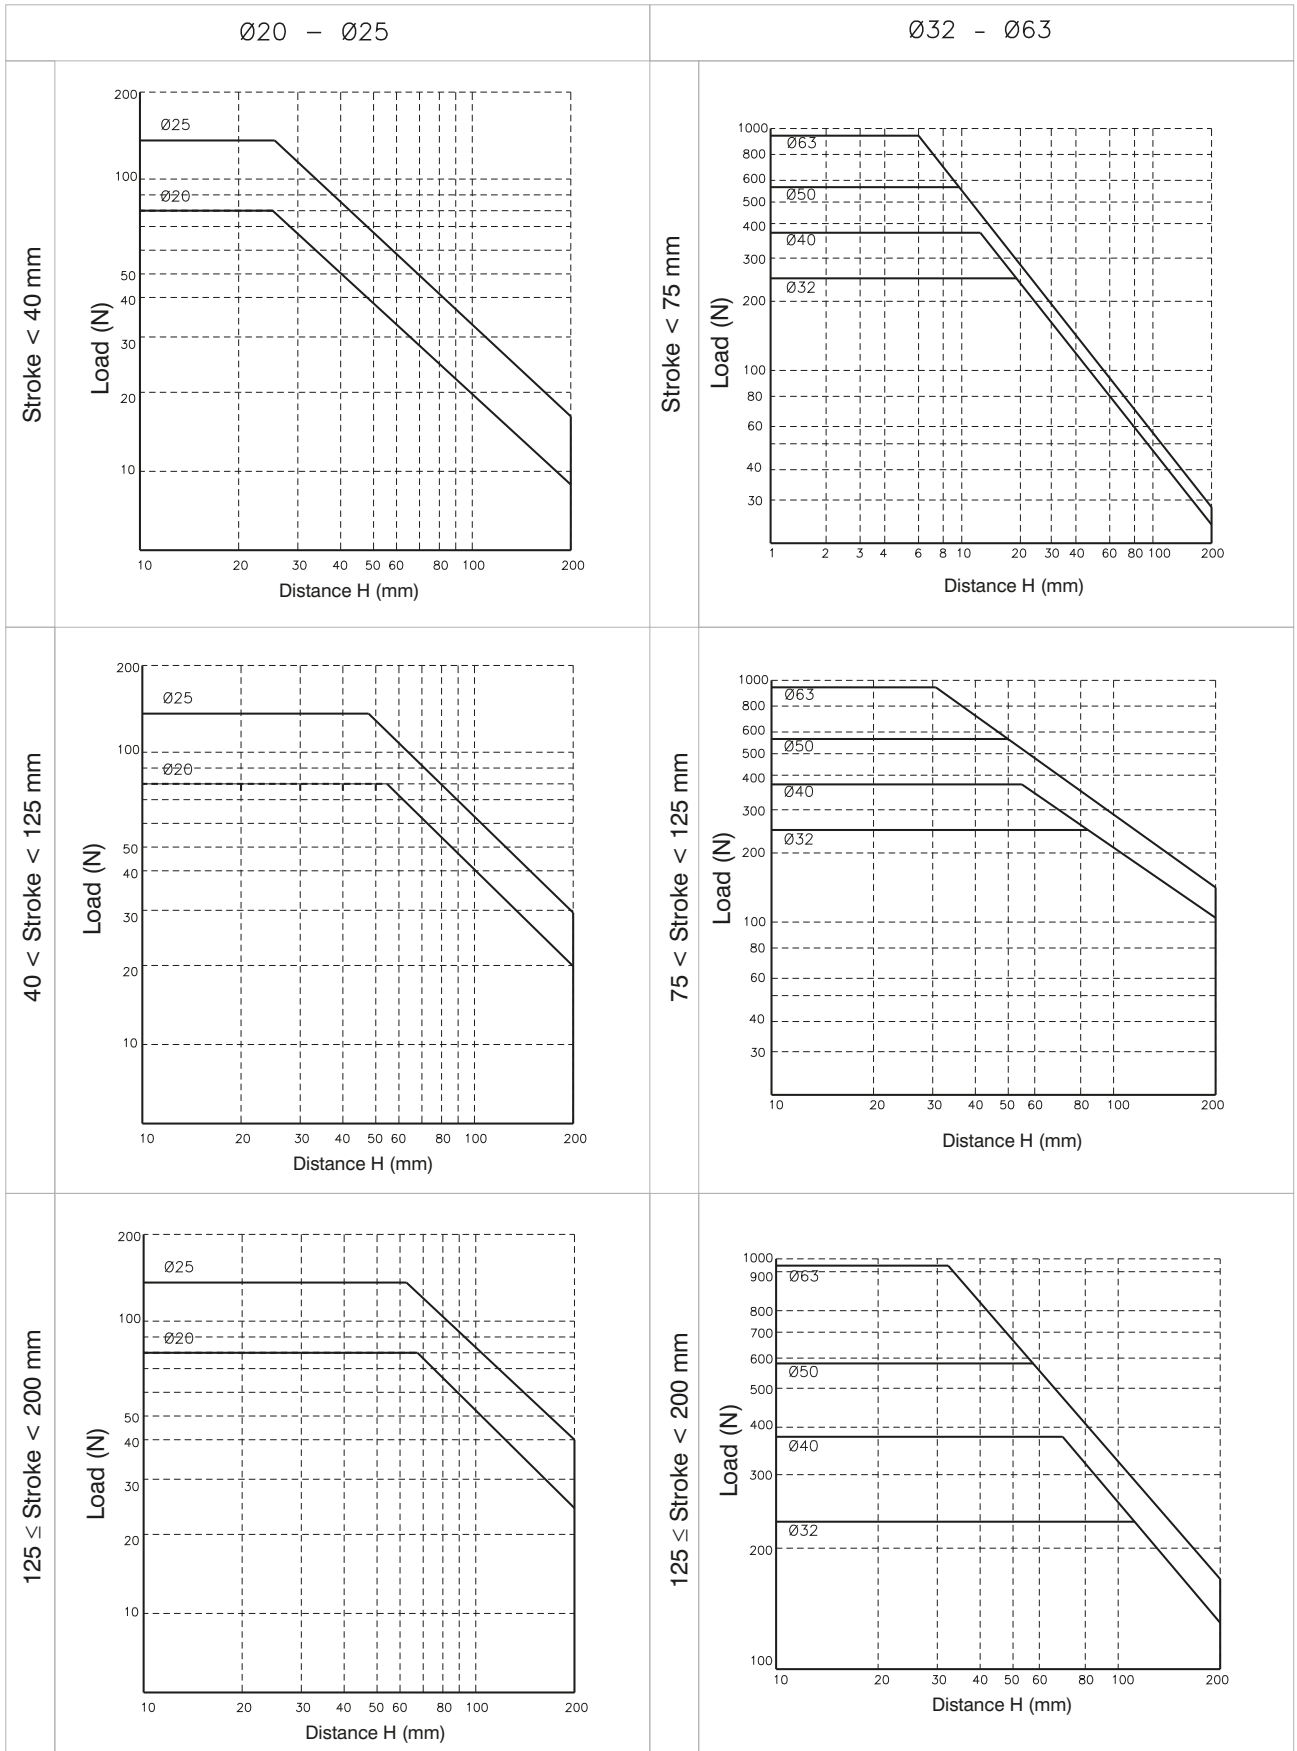

► Heavy duty guided short stroke cylinder

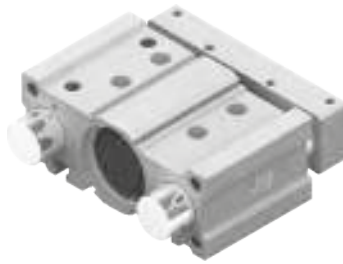

Ordering code

6101.80.stroke. B .

— Side supply ports closed
L = Top supply ports closed

Construction characteristics

Body	anodised aluminium
Rods	C43 chromed steel
Piston	aluminium
Piston rod	C43 chromed steel
Piston rod bushing	sintered bronze
Rod bushing	teflon coated bush
End cap	aluminium
Piston seal	NBR oil-resistant rubber
Piston rod seal	PUR
Plate	anodised aluminium

Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Max. pressure	max. 10 bar
Working temperature	-5°C - +70°C
Cushioning	elastic bumper on both ends


Standard strokes

Bore	Stroke							
	25	50	75	100	125	150	175	200
Ø80	●	●	●	●	●	●	●	●

Intermediate strokes can be obtained by adding specific spacers (5, 10, 15, 20mm).

Example: It is possible to obtain a **6101.80.45.B** cylinder from a **6101.80.50.B** cylinder by adding a 5mm spacer.
The Intermediate strokes manufactured without the use of spacers are considered special executions.

Overall dimensions

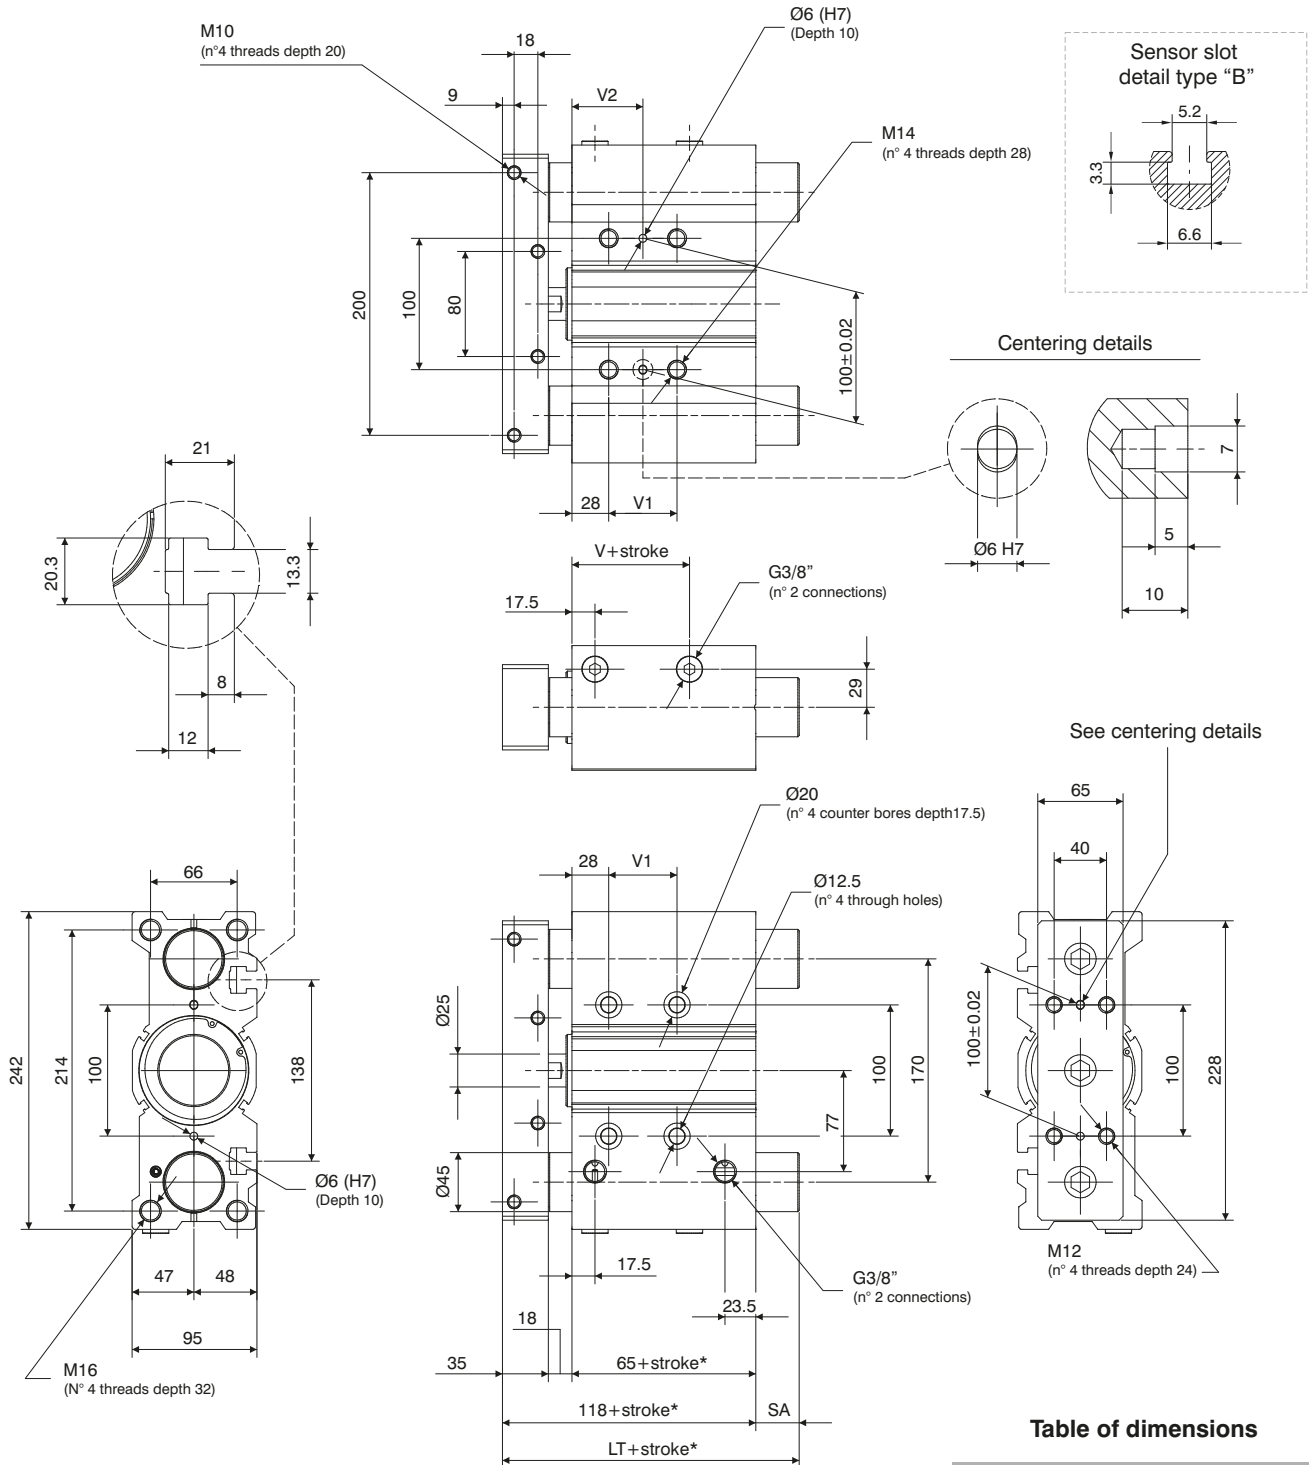

*Dimensions only refer to the "standard stroke"

Table of dimensions

stroke	25	LT	118
	50		118
	> 50		151
		V	14.5
	25	V1	28
stroke	50		52
	75		52
	100		52
	>100		128
	25	V2	42
stroke	50		54
	75		54
	100		54
	>100		92
	25	SA	0
stroke	50		
	> 50		33


Operating criteria

Cylinder theoretic force (N)




Working pressure		
2 bar	1005	907
3 bar	1508	1361
4 bar	2011	1814
5 bar	2513	2268
6 bar	3016	2721
7 bar	3519	3175
8 bar	4021	3629
9 bar	4524	4082
10 bar	5027	4536
Effective area (mm ²)	out	in
	5027	4536

Recommended torque moments

Stroke	N/m
25	49
50	41
75	51
100	45
125	41
150	38
175	35
200	32




“Stopper” device applications

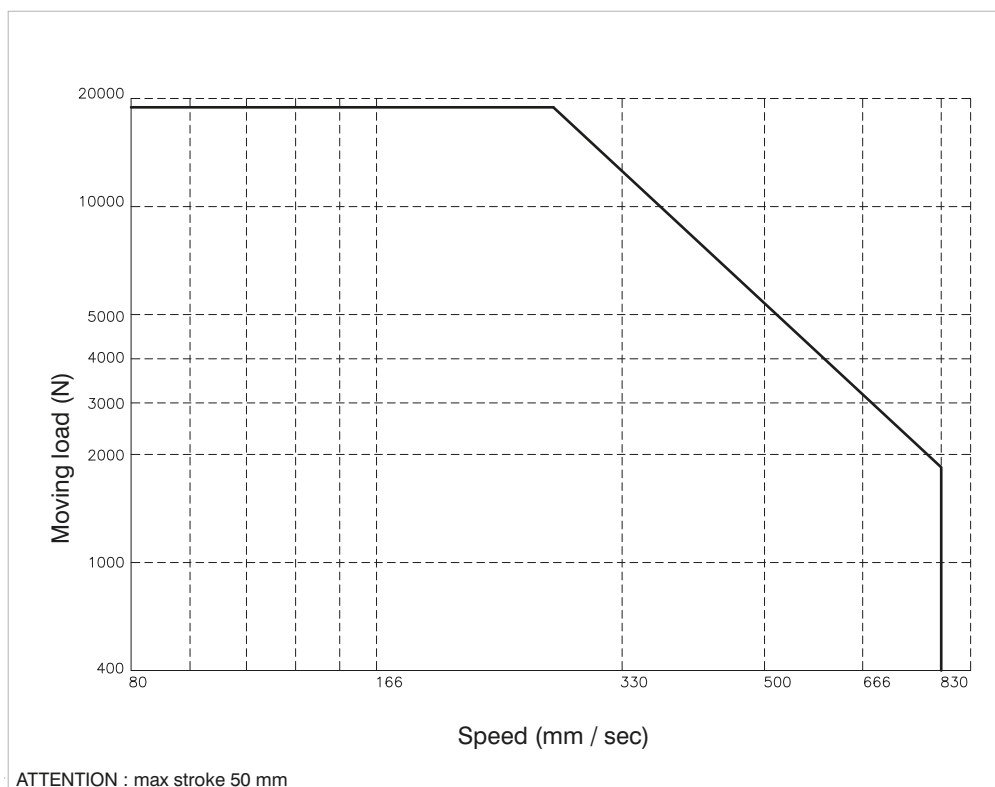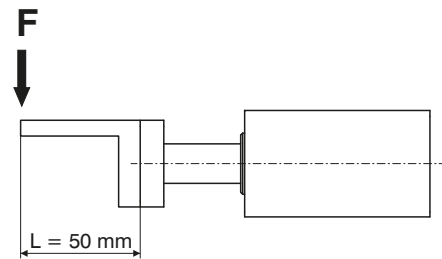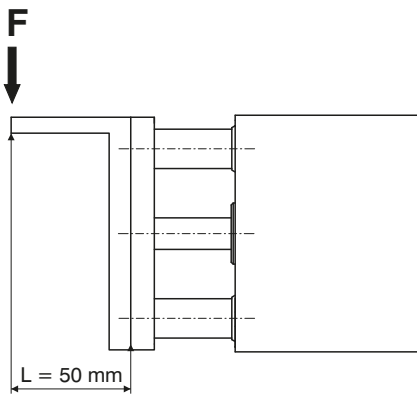


Operating criteria

Handling applications

VERTICAL assembly position

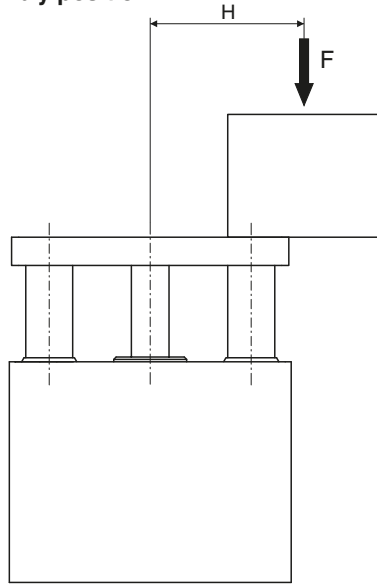


HORIZONTAL assembly position

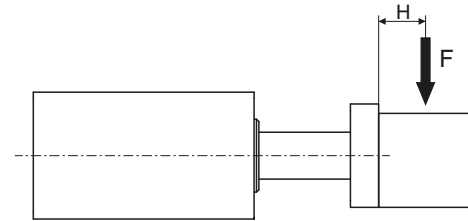


PNEUMATIC ACTUATION


STROKE ≤ 50 mm / V = 200 mm/s

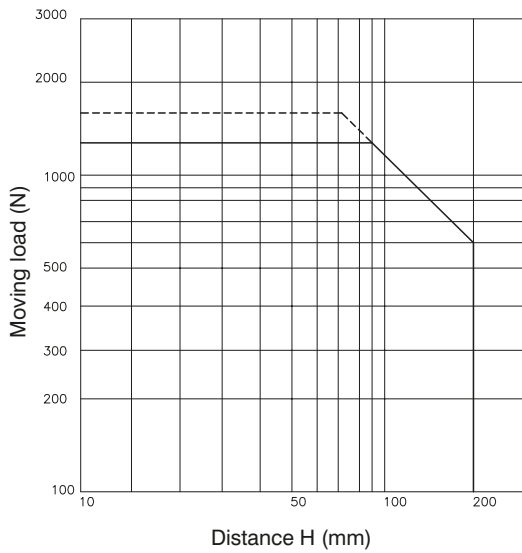


H = 50 mm / V = 200 mm/s

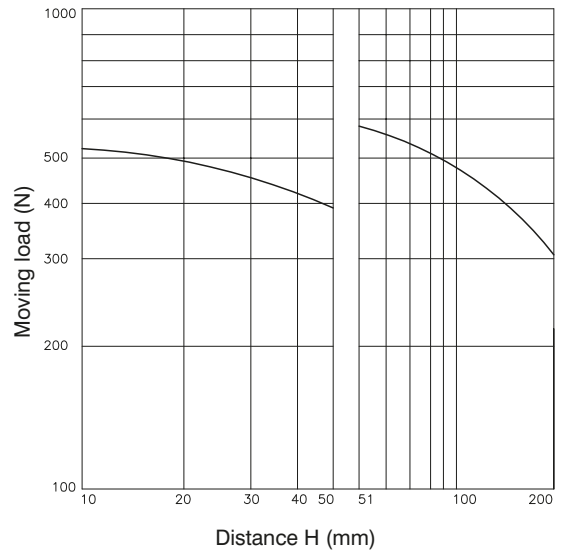

STROKE > 50 mm / V = 200 mm/s

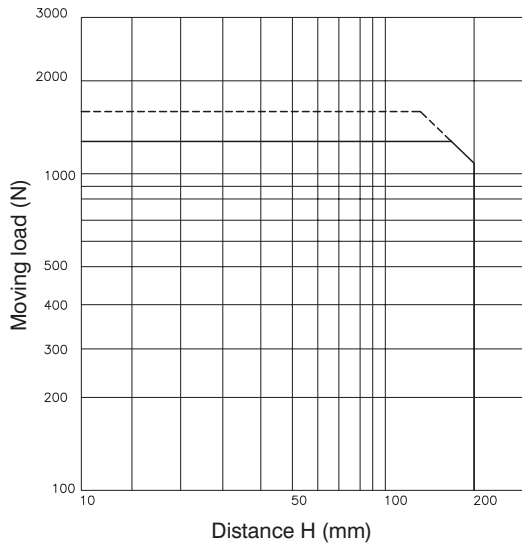

H = 100 mm / V = 200 mm/s

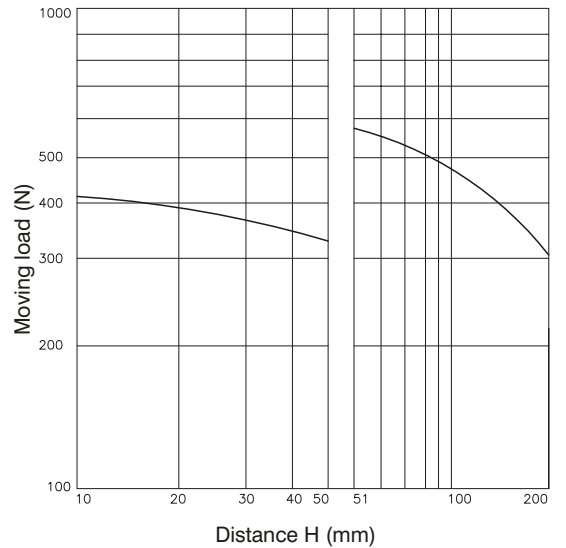

———— Working pressure : 4 bar
- - - - - Working pressure : 5 bar

► Guided compact cylinder with additional metal rod scrapers



Ordering code

6110.Ø.stroke. C .

- 32
- 40
- 50
- 63

Side supply ports closed
L = Top supply ports closed

Construction characteristics

Body	anodised aluminium
Guide rods	tempered and chromed steel
Piston	aluminium
Piston rod	C43 chromed steel
Rods bushing	bearing bushing
End cap	anodised aluminium
Piston seal	oil resistant NBR rubber
Piston rod seal	PUR
External rod scraper	brass
Internal rod scraper	NBR
Plate	nickel plated steel

The cylinders are equipped with 4 rod scrapers on the guide rods and 1 rod scraper on the central piston rod

Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	max. 10 bar
Working temperature	-5°C - +70°C
Cushioning	elastic bumper on both ends



Standard strokes

Bore	Stroke									
	10	20	25	50	75	100	125	150	175	200
Ø32			●	●	●	●	●	●	●	●
Ø40			●	●	●	●	●	●	●	●
Ø50			●	●	●	●	●	●	●	●
Ø63			●	●	●	●	●	●	●	●

Intermediate strokes can be obtained using spacers with defined length (5, 10, 15, 20 mm).







Example: It is possible to obtain a **6110.32.45.B** cylinder from a **6110.32.50.B** cylinder by inserting a spacer with length of 5 mm. The intermediate strokes manufactured without the use of spacers are considered special executions.

Overall dimensions

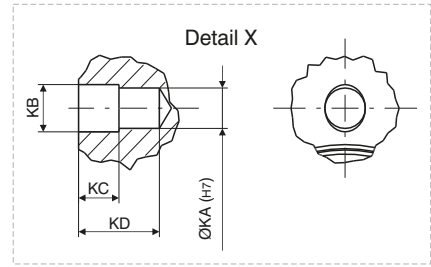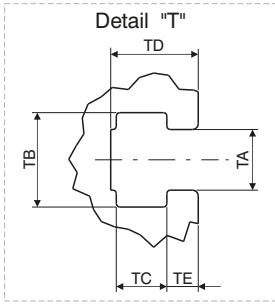

3

PNEUMATIC ACTUATION

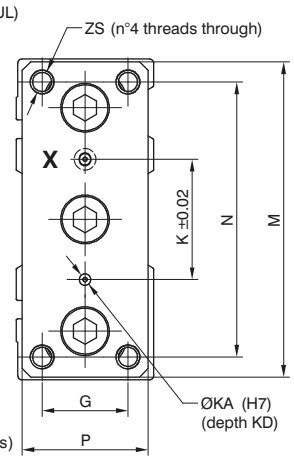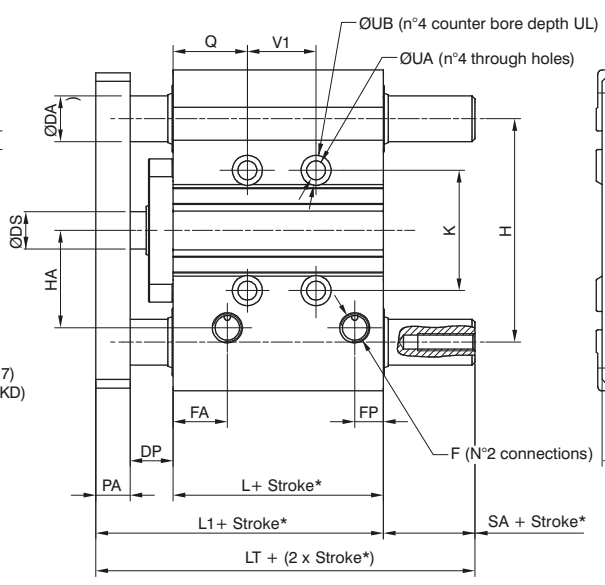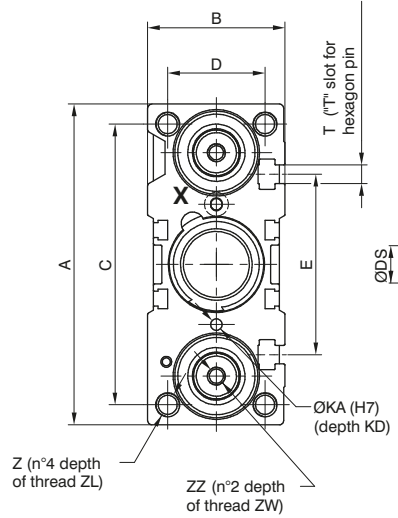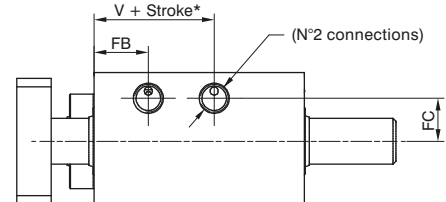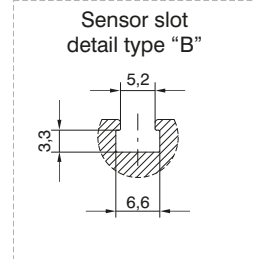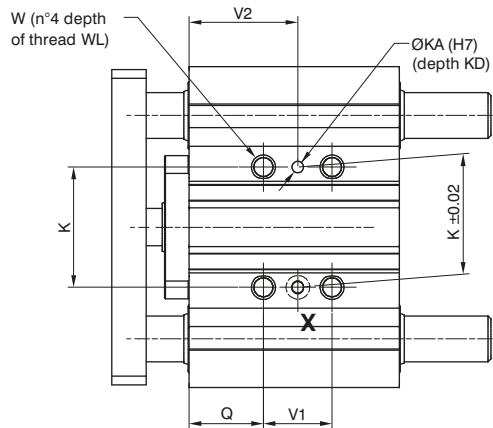



Overall dimensions

Bore	Ø32	Ø40	Ø50	Ø63
Table of dimensions				
A	112	120	148	162
B	48	54	64	78
C	98	106	130	142
D	34	40	46	58
DA	16	16	20	20
DP	15	20	23	23
DS	16	16	20	20
E	63	72	92	110
F	G1/8"	G1/8"	G1/4"	G1/4"
FA	19	13	13	14
FB	19	13	13	14
FC	15	18	21,5	28
FP	10	11	11	12,5
G	30	30	40	50
H	78	86	110	124
HA	34	38	47	55
K	42	50	66	80
KA	4	4	5	5
KB	4,5	4,5	6	6
KC	3	3	4	4
KD	6	6	8	8
L	48,5	50	50	55
L1	75,5	82	88	93
LT	82,5	89	93	100
M	110	118	146	158
N	96	104	130	130
PA	12	12	15	15
P	44	44	60	70
Q	26	22	24	24
SA	7	7	5	7
T	M6	M6	M8	M10
TA	6,5	6,5	8,5	11
TB	10,5	10,5	13,5	17,8
TC	5,5	5,5	7,5	10
TD	9,5	11	13,5	18,5
TE	3,5	4	4,5	7
UA	6,6	6,6	8,6	8,6
UB	11	11	14	14
UL	7,5	7,5	9	9
V	17	19	15	20
V1	See table 1			
V2				
W	M8x1,25	M8x1,25	M10x1,5	M10x1,5
WL	16	16	20	20
Z	M8x1,25	M8x1,25	M10x1,5	M10x1,5
ZL	20	20	22	22
ZS	M8x1,25	M8x1,25	M10x1,5	M10x1,5
ZZ	M6	M8	M10	M10
ZW	20	20	25	25

Table 1 Bore	V1			V2		
	stroke ≤ 25	25 < stroke ≤ 100	100 < stroke ≤ 200	stroke ≤ 25	25 < stroke ≤ 100	100 < stroke ≤ 200
Ø32	24	48	124	38	50	88
Ø40				34	46	84
Ø50				36	48	86
Ø63	28	52	128	38	50	88



Series 6200 - Twin-rod slide units

General

TWIN-ROD SLIDE UNITS SERIES 6200 AND 6210

The 6200 series twin-rod linear guide units are wide cylinders used in manipulation applications and are characterised by their high force output thanks to their double piston design.

Bores range from 10mm to 32mm diameter, with sintered bronze bearings for standard applications and linear ball bearings for more rugged applications.

One major characteristic of these cylinders is the precision of their anti-rotational design, with the possibility of regulating the stroke to within 0.5mm.

When using magnetic sensors, the 1580 series sensor sits entirely within the extrusion, resulting in a smooth profile.

The liner guided units range includes , alongside the conventional two rod version with flange series 6200 , also the through rod version with twin flanges series 6210

Thanks to the twin-rod, double yoke design of the 6210 series it is possible to either fix the body and use the ends of the rods, or alternatively to fix the rod ends and use the body as the moving part. The cylinder can be piped through the body or through the rods depending on the application.

Stroke limiting screws are fitted at either end of the stroke. The substitution of these screws with shock absorbers makes it possible to use the cylinder on higher velocity applications (up to 500mm/sec.) Slots are provided along the edge of these units to accommodate 1580 series miniature sensors.

► Twin-rod slide units



Ordering code

6200.Ø.stroke.

- 10
- 15
- 20
- 25
- 32

B = Control unit with bronze bush
C = Control unit with bearing bush

Construction characteristics

Body	anodised aluminium
Rods	C43 chromed steel (control unit with bronze bush) tempered and chromed steel (control unit with bearing bush)
Piston	aluminium
Rod bushing	brass
End cap	anodised aluminium
Piston seal	oil resistant NBR rubber
Piston rod seal	PUR
Plate	anodised aluminium


Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Max. pressure	7 bar
Working temperature	-5°C - +70°C
Cushioning	elastic bumper


Standard strokes

Bore	Stroke														
	10	15	20	25	30	35	40	45	50	60	70	75	80	90	100
Ø10	●	●	●	●	●	●	●	●	●	●	●	●			
Ø15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Ø20	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Ø25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Ø32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Overall dimensions Ø10 - Ø15

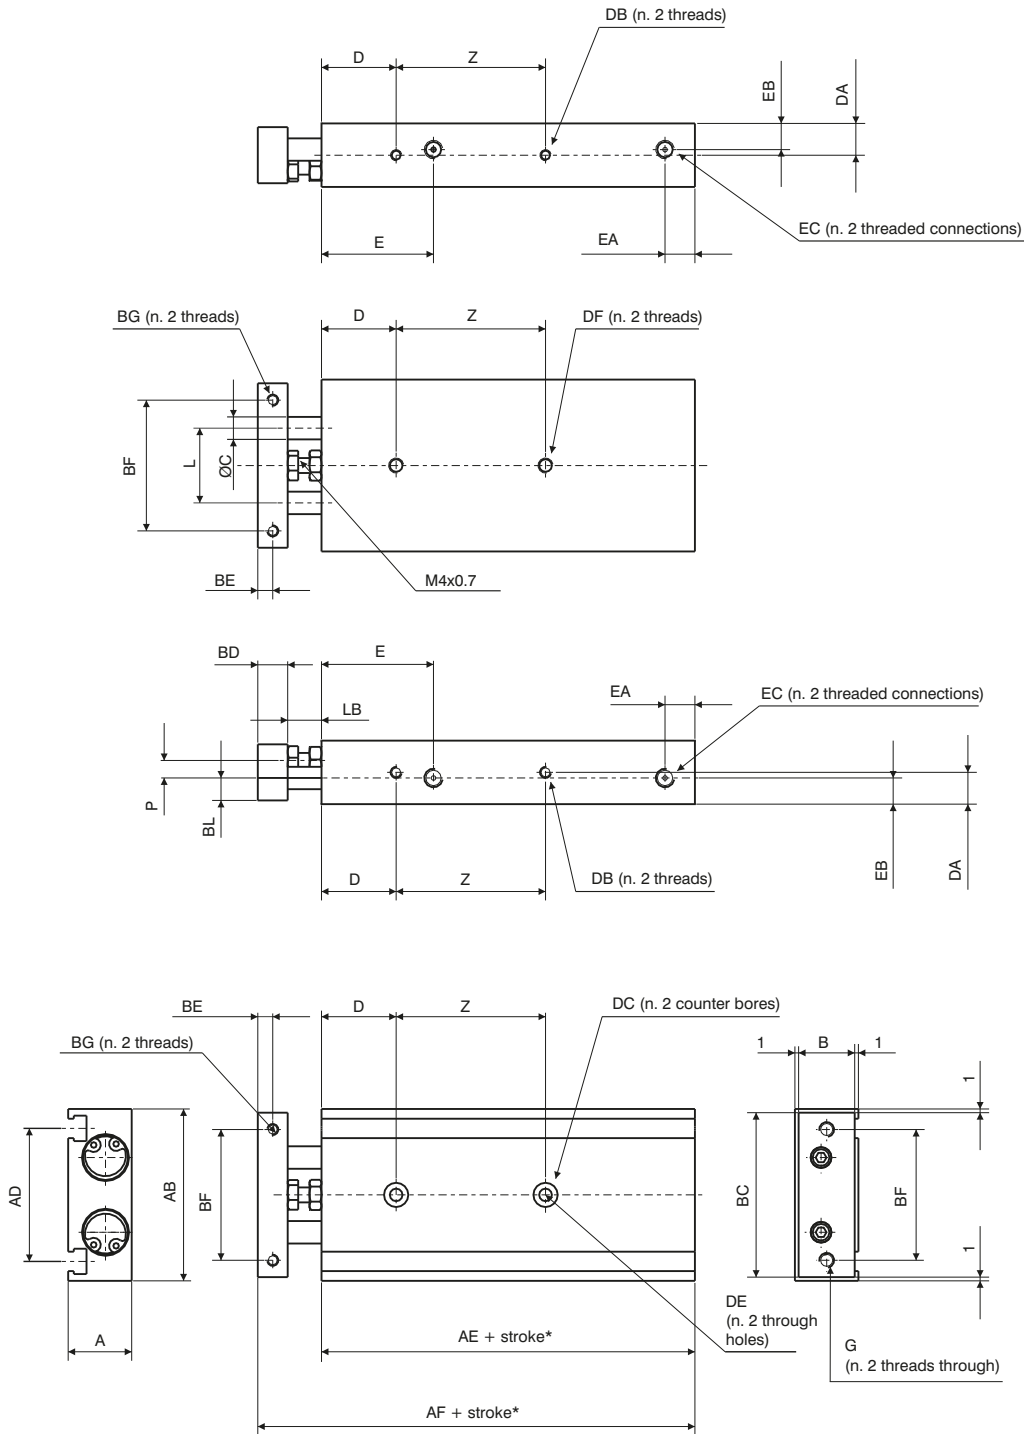


*Dimensions only refer to the "standard stroke"



Bore		Ø10	Ø15
A		17	20
AB		46	58
AD		35,6	48
AE		55	60
AF		72	79
B		15	18
BC		44	56
BD		8	10
BE		4	5
BF		35	45
BG		M3x0,5	M4x0,7
	Useful depth	5	6
BL		6	9
C		6	8
D		20	30
DA		8,5	10
DB		M3x0,5	M4x0,7
	Useful depth	4,5	5
DC		6,5	8
	depth	3,3	4,4
DE		3,4	4,3
DF		M4x0,7	M5x0,8
	Useful depth	7	8
E		30	38,5
EA		8	8
EB		7	10
EC		M5x0,8	M5x0,8
	Useful depth	4,5	4,5
F		M4x0,7	M4x0,7
G		M4x0,7	M5x0,8
L		20	25
LB		9	9
P		4,7	4,5
Z stroke	10 - 25	30	25
	30 - 50	40	35
	60 - 75	50	45
	80	-	45
	90-100	-	55

Overall dimensions Ø20 - Ø25 - Ø32

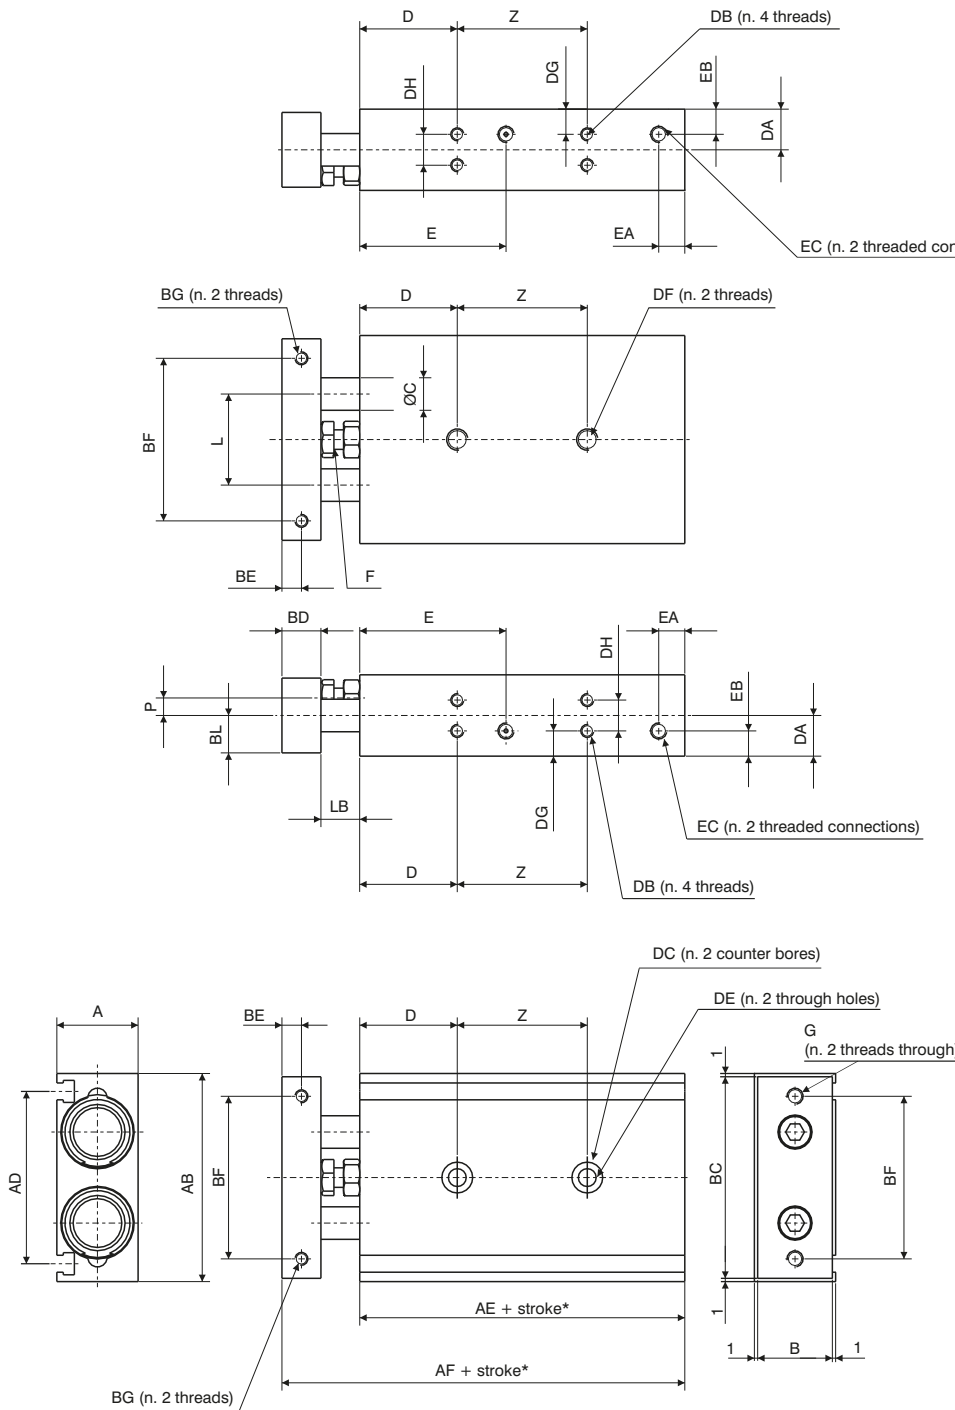

*Dimensions only refer to the "standard stroke"

Bore		Ø20	Ø25	Ø32
A		25	30	38
AB		64	80	98
AD		53	64	76
AE		70	72	82
AF		94	96	112
B		23	28	36
BC		62	78	96
BD		12	12	16
BE		6	6	8
BF		50	60	75
BG		M4x0,7	M5x0,8	M5x0,8
	Useful depth	6	7,5	8
BL		11,5	14	18
C		10	12	16
D		30	30	30
DA		12,5	15	19
DB		M4x0,7	M5x0,8	M5x0,8
	Useful depth	6	7,5	7,5
DC		9,5	11	11
	depth	5,3	6,3	6,3
DE		5,5	6,9	6,9
DF		M6x1	M8x1,25	M8x1,25
	Useful depth	10	12	12
DG		7,75	8,5	9
DH		9,5	13	20
E		45	46	56
EA		8	9	10
EB		7,75	15	19
EC		M5x0,8	G1/8	G1/8
	Useful depth	4,5	6,5	6,5
F		M6x1	M6x1	M8x1,25
G		M5x0,8	M6x1	M6x1
L		28	35	44
LB		12	12	14
P		5,4	7,8	12
Z	stroke	10 - 25	30	30
		30 - 50	40	40
		60 - 100	60	60



Operating instructions

3


PNEUMATIC ACTUATION

Stroke	Bore					Weight g				
	Ø10	Ø15	Ø20	Ø25	Ø32					
	Control unit with bronze bush									
10	150	250	400	610	1150					
15	160	265	420	635	1190					
20	170	280	440	660	1230					
25	180	290	460	690	1275					
30	190	300	480	720	1320					
35	200	315	495	745	1360					
40	210	330	510	770	1400					
45	220	345	530	800	1450					
50	230	360	550	830	1490					
60	250	390	585	890	1580					
70	270	420	620	950	1665					
75	280	435	640	970	1710					
80		450	660	995	1755					
90		480	700	1060	1840					
100		510	740	1000	1930					
	Control unit with bearing bush									
10	160	270	430	620	1160					
15	165	285	445	645	1205					
20	170	300	460	670	1250					
25	180	310	480	700	1295					
30	190	320	500	730	1340					
35	200	335	515	755	1380					
40	210	350	530	780	1420					
45	220	365	550	810	1465					
50	230	380	570	840	1510					
60	250	410	605	895	1595					
70	270	440	640	955	1680					
75	280	455	660	980	1720					
80		470	680	1005	1765					
90		500	715	1065	1855					
100		530	750	1110	1940					
Working pressure	Theoretical slide force									
1 bar	16	10	35.5	25	63	47	98	75.5	161	120.5
1.5 bar	23.5	15	53	38	94	62.5	147.5	113.5	241	181
2 bar	31.5	20.0	70.5	50.5	125.5	94	196.5	151	321.5	241
3 bar	47	30	106	75.5	188.5	141	294.5	227	482.5	362
4 bar	63	40	141	101	251	188	393	302.5	643	482.5
5 bar	78.5	50	176.5	126	314	236	491	378	804	603
6 bar	94	60	212	151	377	283	589	453.5	965	723.5
7 bar	110	70	247	176.5	440	330	687.5	529	1125.6	844
	Out	In	Out	In	Out	In	Out	In	Out	In



Operating instructions

Possible loads

Control unit with bronze bush

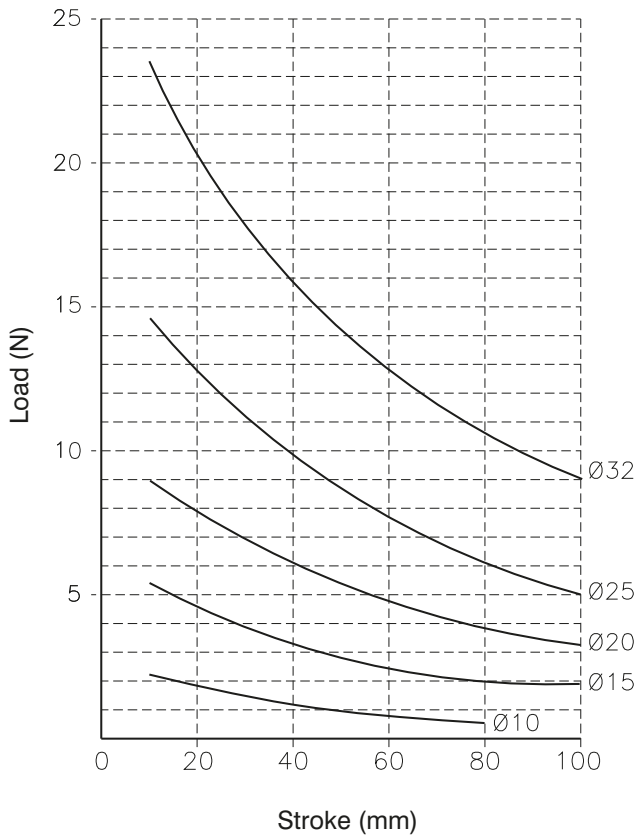

Control unit with bearing bush

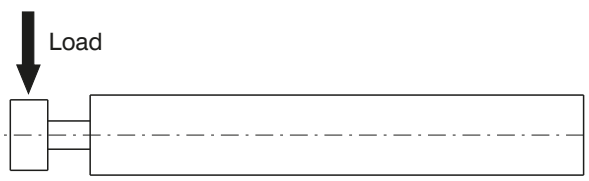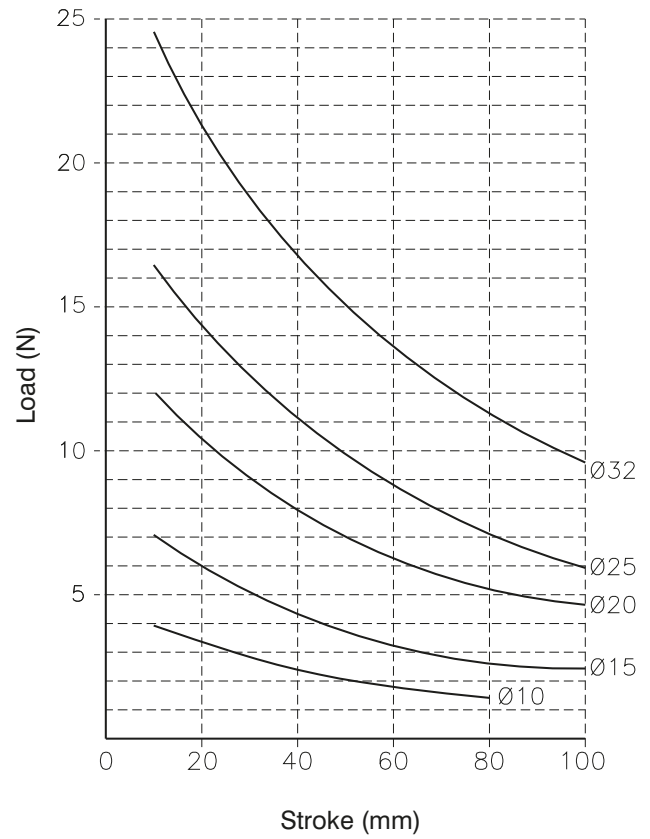

Twin-rod slide units



Ordering code

6200.Ø.stroke.
 10
 15
 20
 25
 32
 B = Control unit with bronze bush
 C = Control unit with bearing bush

Construction characteristics

Body	anodised aluminium
Rods	C43 chromed steel (control unit with bronze bush) tempered and chromed steel (control unit with bearing bush)
Piston	aluminium
Rod bushing	brass
End plate	anodised aluminium
Piston seal	oil resistant NBR rubber
Piston rod seal	PUR
Plate	anodised aluminium



Technical characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Max. pressure	7 bar
Working temperature	-5°C - +70°C
Cushioning	elastic bumper

Standard strokes


Bore	Stroke														
	10	15	20	25	30	35	40	45	50	60	70	75	80	90	100
Ø10	●	●	●	●	●	●	●	●	●	●	●	●			
Ø15	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Ø20	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Ø25	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Ø32	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Overall dimensions Ø10

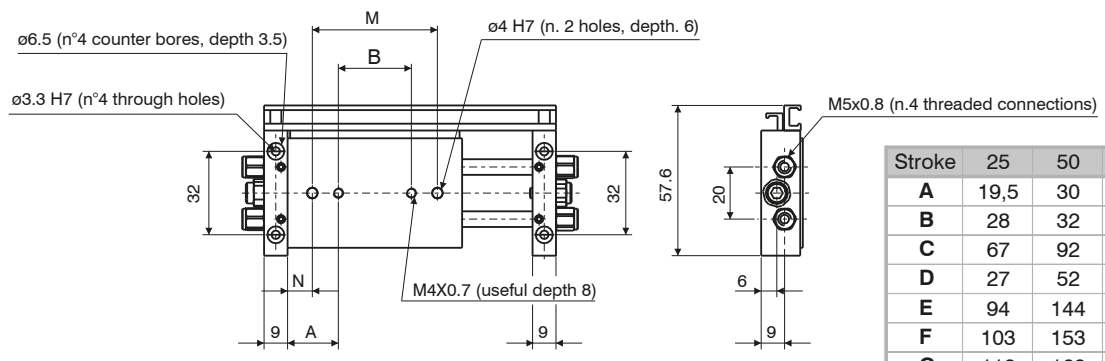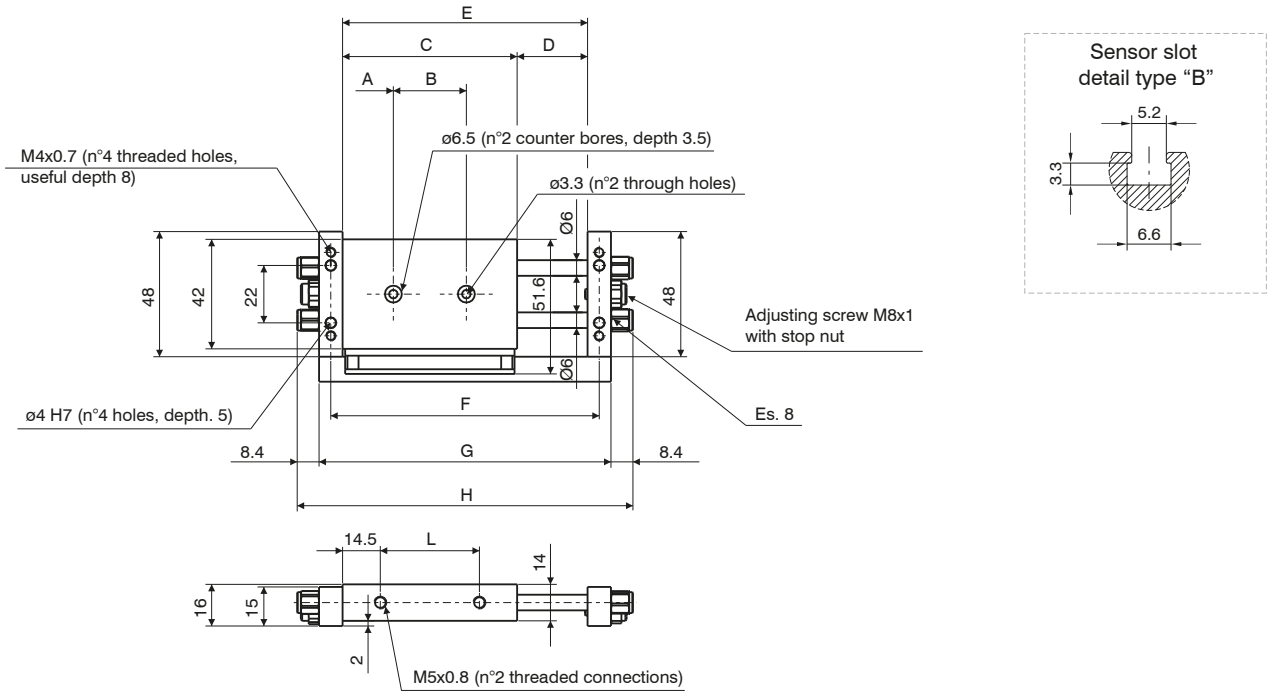


Stroke	25	50	75	100
A	19,5	30	35	35
B	28	32	47	72
C	67	92	117	142
D	27	52	77	102
E	94	144	194	244
F	103	153	203	253
G	112	162	212	262
H	129	179	229	279
L	38	63	88	113
M	48	52	67	92
N	9,5	20	25	25
Weight				
g	160	230	280	310


MOUNTING WITH FIXED PLATE

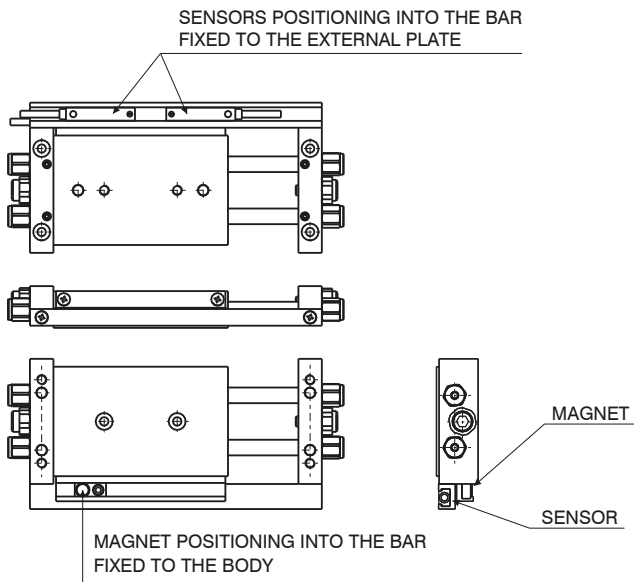

MOUNTING WITH A FIXED BODY

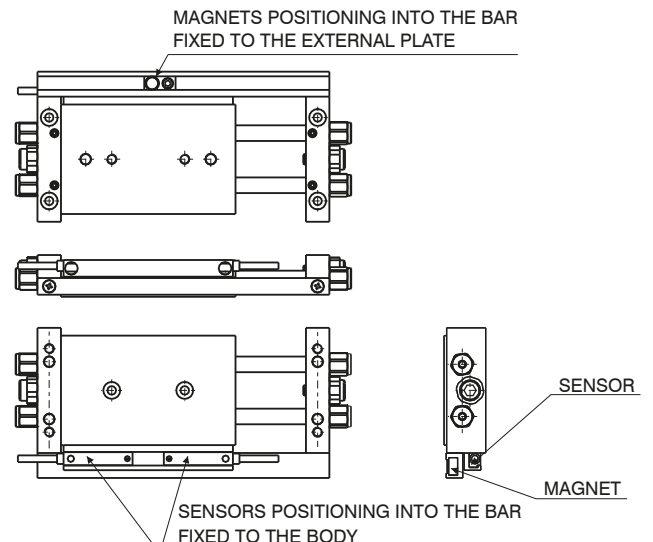


Overall dimensions Ø15

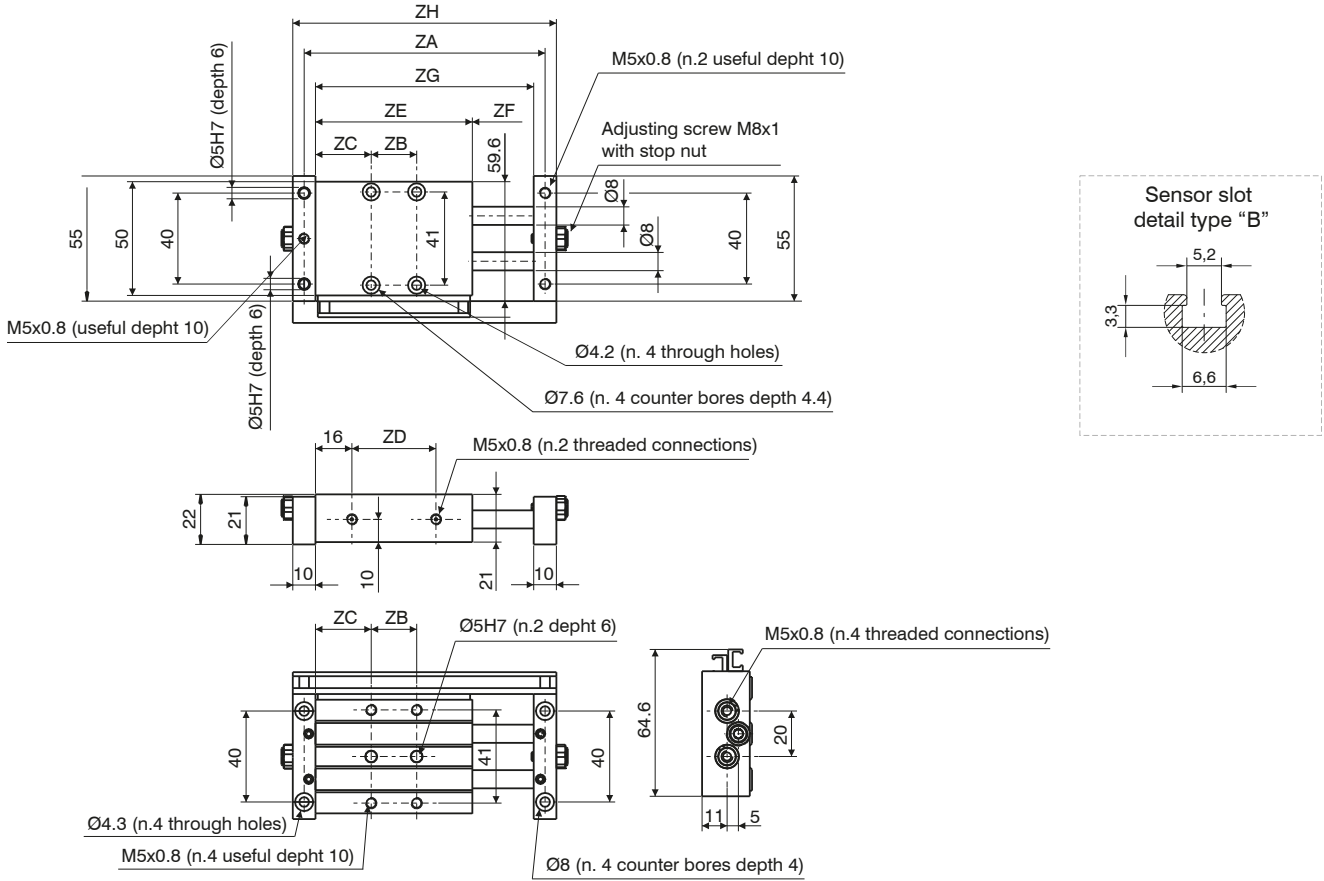


Stroke	25	50	75	100	125	150	175	200
ZA	106	156	206	256	306	356	406	456
ZB	20	45	65	90	90	90	90	90
ZC	24,5	24,5	27	27	39,5	52	64,5	77
ZD	37	62	87	112	137	162	187	212
ZE	69	94	119	144	169	194	219	244
ZF	27	52	77	102	127	152	177	202
ZG	96	146	196	246	296	346	396	446
ZH	116	166	216	266	316	366	416	466
Weight								
g	240	350	450	550	670	750	900	1000


MOUNTING WITH FIXED PLATE

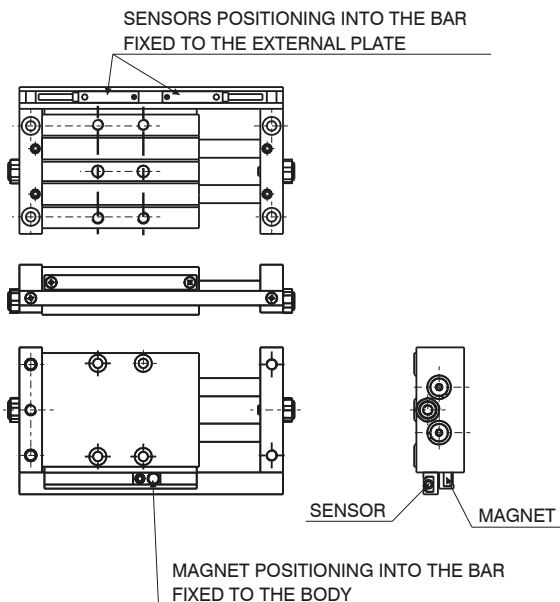

MOUNTING WITH FIXED BODY

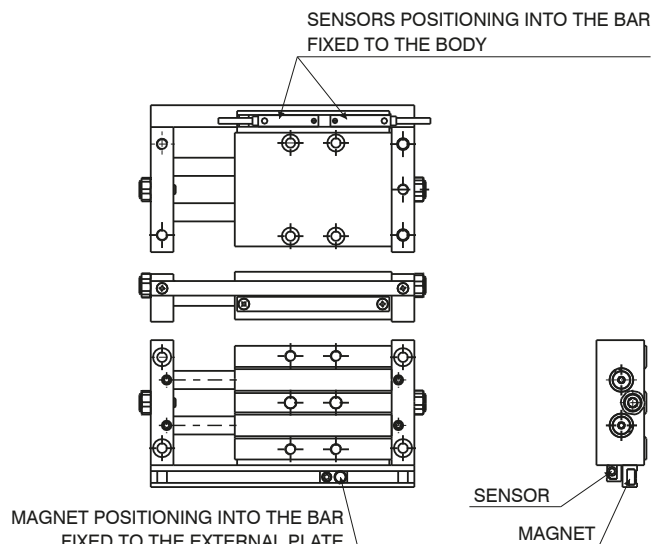


Overall dimensions Ø25

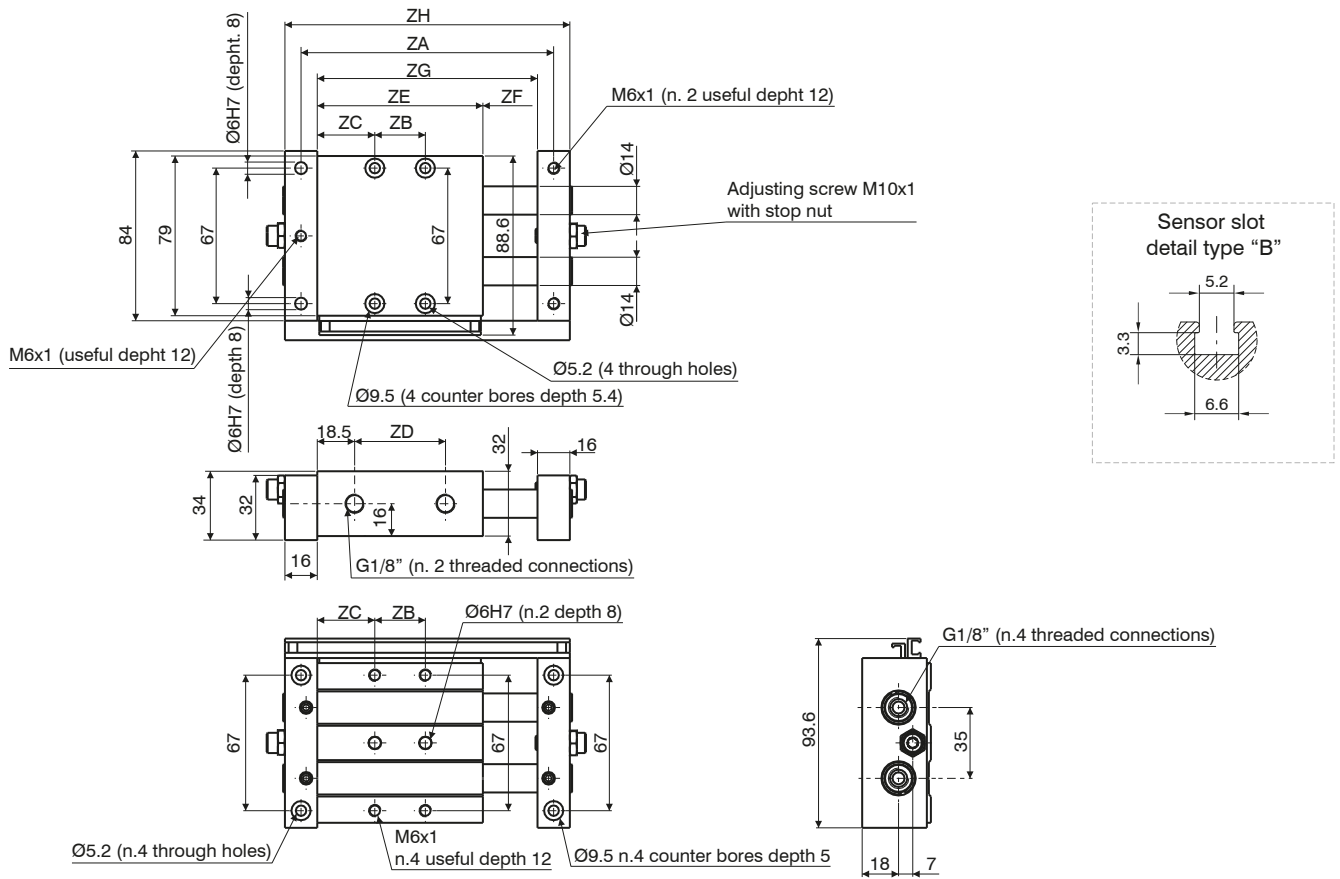


Stroke	25	50	75	100	125	150	175	200
ZA	125	175	225	275	325	375	425	475
ZB	25	45	65	90	90	90	90	90
ZC	28,5	31	33,5	33,5	46	58,5	71	83,5
ZD	45	70	95	120	145	170	195	220
ZE	82	107	132	157	182	207	232	257
ZF	27	52	77	102	127	152	177	202
ZG	109	159	209	259	309	359	409	459
ZH	141	191	241	291	341	391	441	491
Weight								
g	950	1140	1350	1600	1800	2000	2300	2500

MOUNTING WITH FIXED PLATE

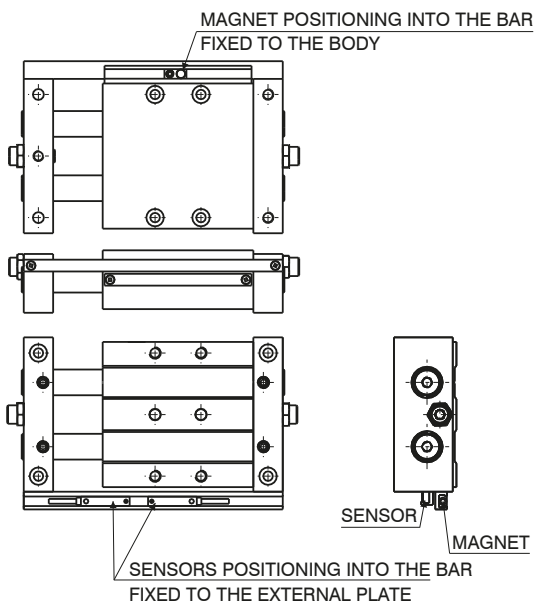

MOUNTING WITH FIXED BODY

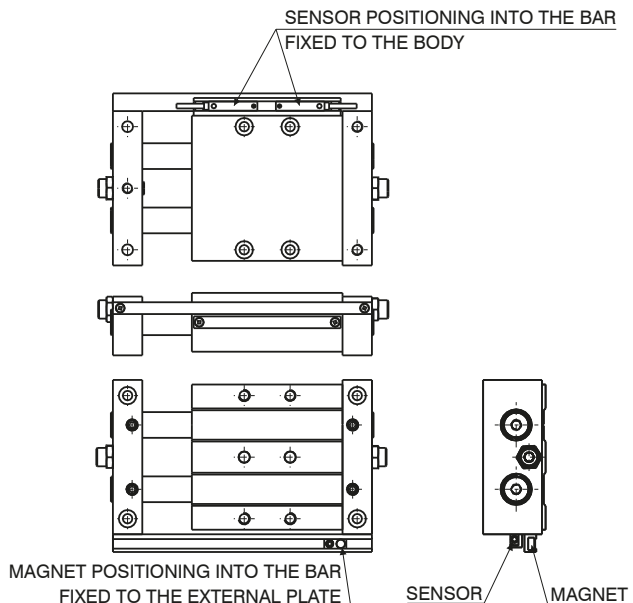

Operating conditions


Theoretical force (N)

Working pressure	Bore		
	Ø10	Ø15	Ø25
2 bar	20	41	119
3 bar	30	62	179
4 bar	40	83	239
5 bar	51	104	299
6 bar	61	124	358
7 bar	71	145	418
8 bar	81	166	478
9 bar	91	186	537
	101	207	597
	Effective area (mm ²)		

Deflection of piston rods


Applied load to body centre

Bore	Load	Deflection (mm)	
Ø10	10 N	0,07	/
Ø15	30 N	0,08	0,28
Ø25	60 N	0,02	0,08
		100	200
		Stroke	



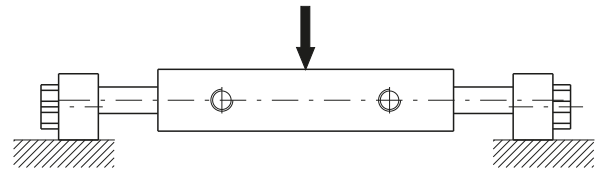


Applied load to body end

Bore	Load	Deflection (mm)			
Ø10	3 N	0,06	0,3	/	/
Ø15	5 N	0,1	0,2	0,5	1
Ø25	10 N	0,03	0,1	0,15	0,25
		50	100	150	200
		Stroke			

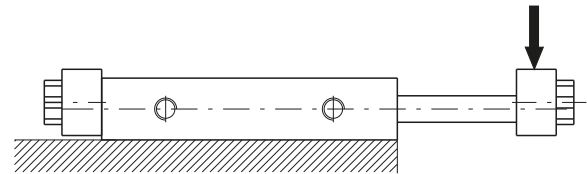

Control unit with bronze bushes

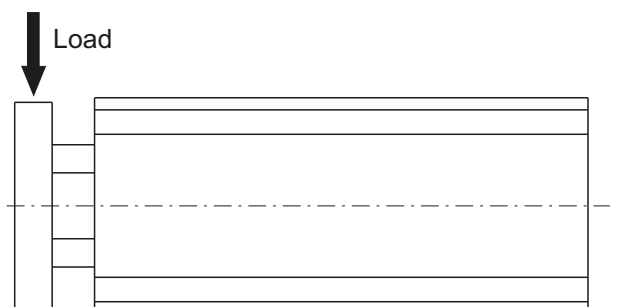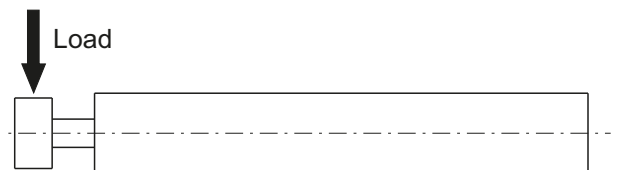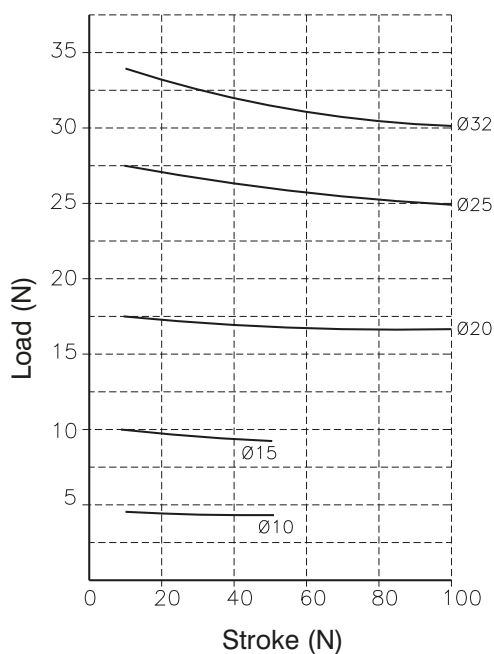



Series 6300 - Pneumatic grippers

General

Pneumatic grippers from the 6300 series are typically used in complex systems such as assembly machines, robots, manipulators etc.

This series covers the wide range requirements of this sector, allowing a variety of applications.

The range includes grippers equipped with holding fingers operating from -10° to $+30^{\circ}$ degrees, with 180° degree opening, or a parallel guided gripper with great rigidity throughout the stroke.

The parallel grippers cater for larger openings (three different strokes for each diameter) with synchronised operation via a pinion-rack system with high strength thanks to a double piston mechanism.


For the typical application of supplying a piece upon to a machine tool, make provision for an automatic three-pronged movement carried along by a wedge mechanism, containing the elevated force dimensions.

The holding fingers can have a tolerance reference as a precise fixing device for the catching mechanism. Every type of "hand" offers different functional levels of performance at varying diameters and lengths, secondary to the application by the "fingers".

Pneumatic grippers, angular - Standard version



Ordering code

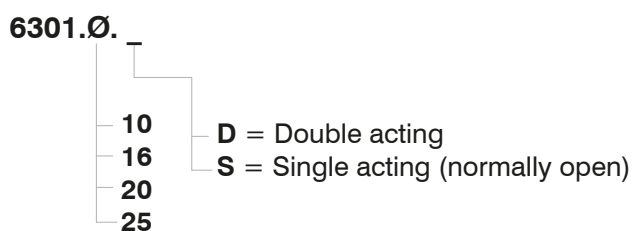

Construction characteristics


Body	anodised aluminium
Piston	AISI 303 stainless steel
Fingers	nitrate steel
End cap	anodised aluminium
Seals	oil resistant NBR rubber

Operational characteristics



Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.		
Working pressure	1 - 6 bar (double acting) - 2.5 - 6 bar (single acting)		
Operating temperature	-5°C - +70°C		
Opening total stroke	-10° - 30°		
Holding force (Nm) at 5 bar	Bore - Double acting - Single acting		
	Ø10	0.1	0.07
	Ø16	0.4	0.30
	Ø20	0.7	0.55
	Ø25	1.35	1.08
Maximum operating frequency	from Ø10 to Ø25, 190 cycles/minute		

3 PNEUMATIC ACTUATION

Overall dimensions

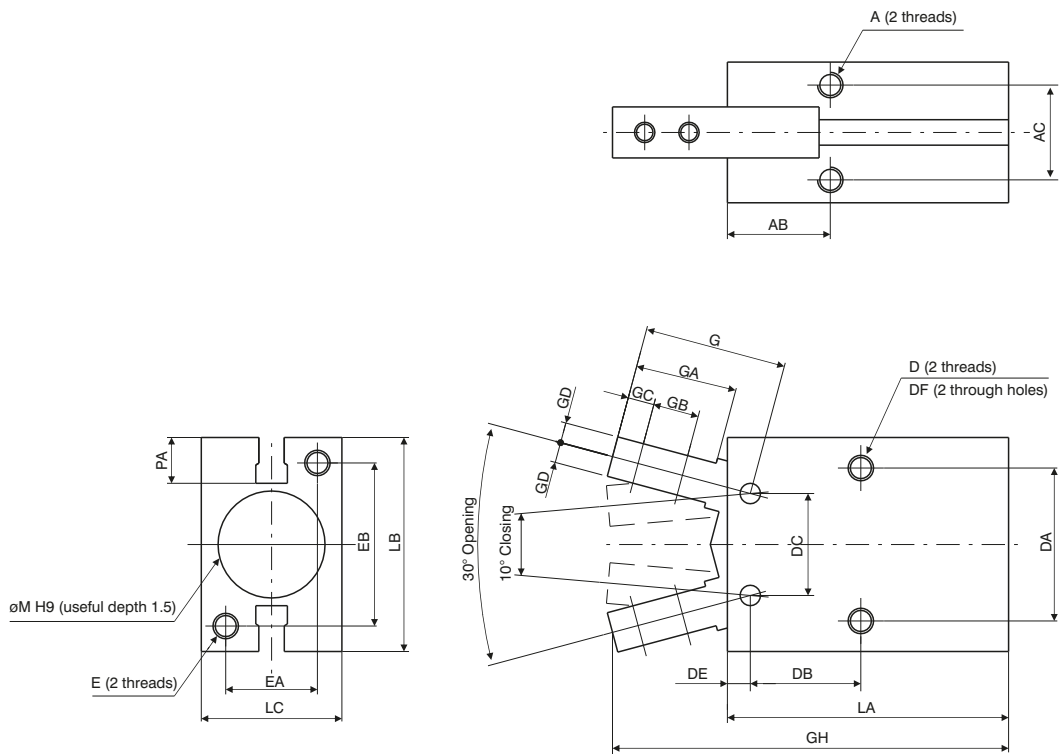

Bore	Ø10	Ø16	Ø20	Ø25
A	M3x0,5	M4x0,7	M5x0,8	M6
Useful depth	6	6,5	8	10
AB	11,6	14,6	20,2	23,9
AC	11,4	16	18,6	22
C	M2,5x0,45	M3x0,5	M4x0,7	M5x0,8
D	M3x0,5	M4x0,7	M5x0,8	M6
Useful depth	5	8	10	12
DA	16	24	30	36
DB	12,8	16,2	21,7	25,8
DC	10	16	20	25
DE	2,8	3,9	4,5	4,6
DF	2,6	3,4	4,3	5,1
E	M3x0,5	M4x0,7	M5x0,8	M6
Useful depth	6	8	10	12
EA	12	15	18	22
EB	18	22	32	40
F	M3x0,5	M5x0,8	M5x0,8	M5x0,8
FA	11	13	15	20
FB	7,2	7	7,5	7,7
FC	18,8	18,3	22,2	23,5
G	17,2	22,6	28	37,5
GA	12	16	20	27
GB	5,7	7	9	12
GC	3	4	5,2	8
GD	2	3,5	4	5
GH	52,4	62,5	78,7	92
GL ^{0/-0,1}	6,4	8	10	12
LA	38,6	44,6	55,2	60,4
LB	23	30,6	42	52
LC	16,4	23,6	27,6	33,6
M ^{H9}	11	17	21	26
PA	5,4	5,8	9	11,5
Weight (g)	40	90	180	315

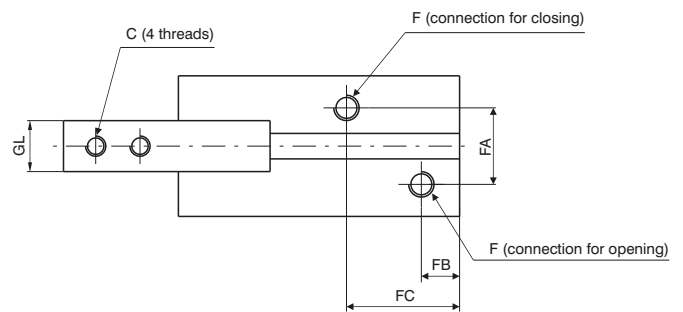





Gripping force 5 bar (Nm)

Bore	Ø10	Ø16	Ø20	Ø25
Double acting (Nm)	0,1	0,4	0,7	1,35
Single acting (Nm)	0,07	0,3	0,55	1,08

NOTE:

Bore selection should be made considering a holding force 10 to 20 times the component weight.
 In case of acceleration/deceleration a further margin of safety should be considered.

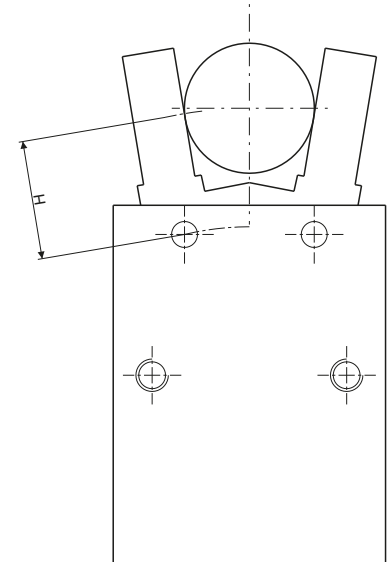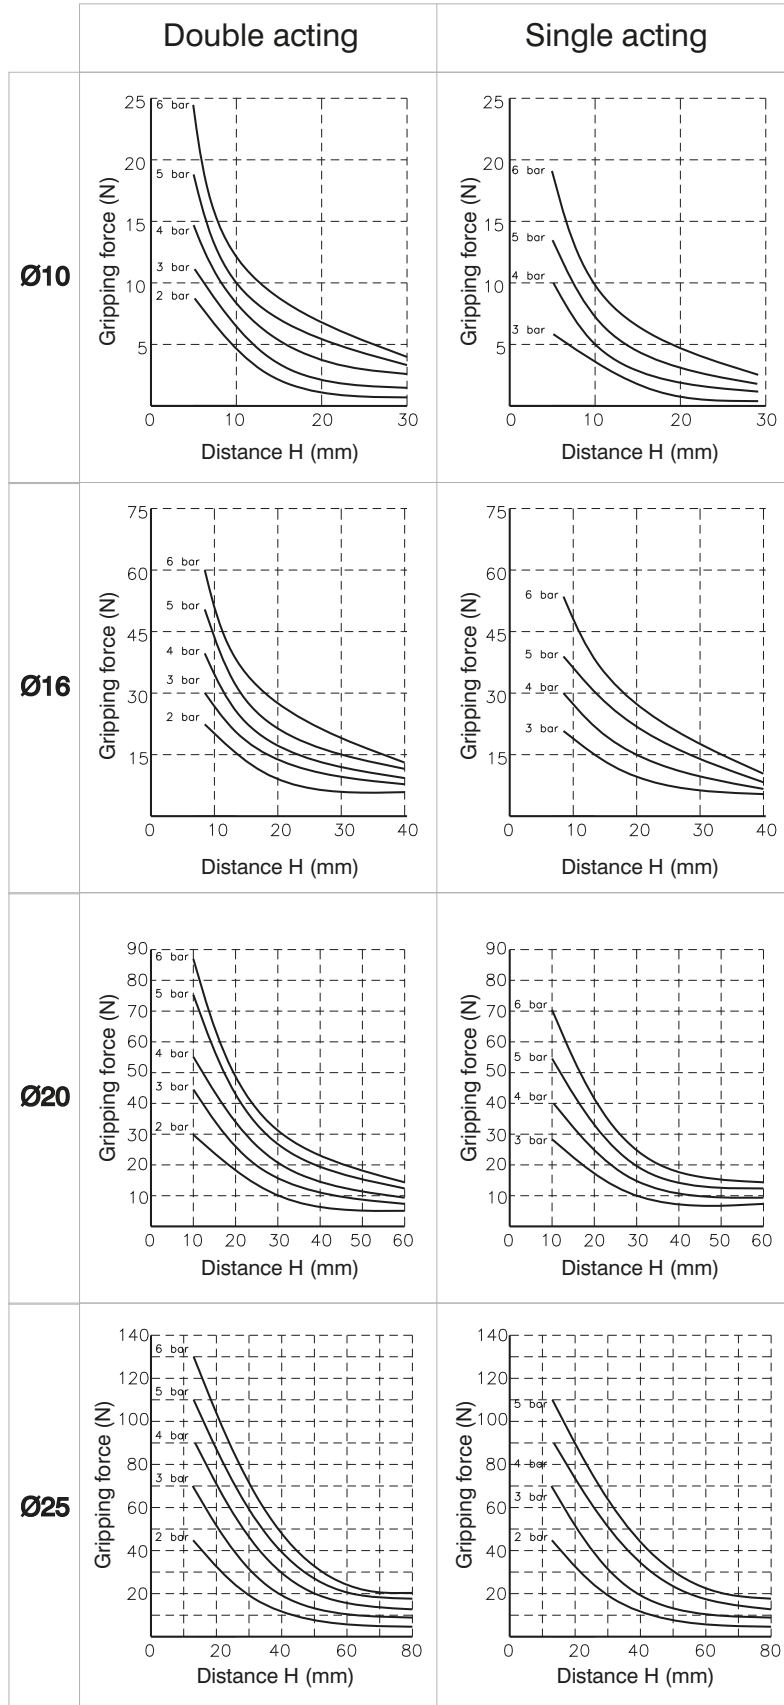

3 PNEUMATIC ACTUATION

► Pneumatic grippers, 180° angular



Ordering code

6302.Ø.D

10
16
20
25


Construction characteristics

Body	anodised aluminium
Piston	aluminium
Fingers	steel
End cap	anodised aluminium



Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	1 - 6 bar
Working temperature	-5C° - +70C°
Opening total stroke	-3° - 180°
Maximum operating frequency	from Ø10 to Ø25, 60 cycles/minute

Overall dimensions

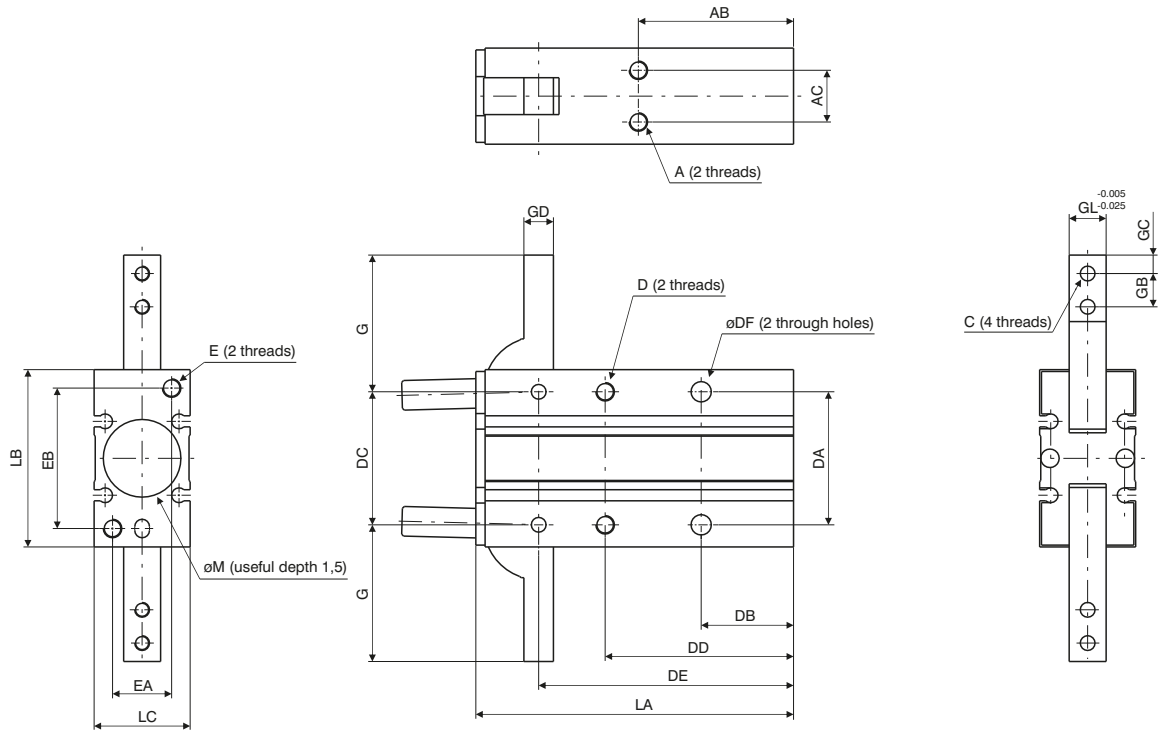

Bore	Ø10	Ø16	Ø20	Ø25
A	M3x0,5	M4x0,7	M5x0,8	M6x1
Useful depth	4	5	8	10
AB	30	33	42	50
AC	9	12	14	16
C	M3x0,5	M3x0,5	M4x0,7	M5x0,8
D	M3x0,5	M4x0,7	M5x0,8	M6x1
Useful depth	6	8	10	12
DA	24	30	36	42
DB	18	20	25	30
DC	22	28	36	45
DD	35	41	51	60
DE	47,5	55,5	69	86
DF	3,4	4,5	5,5	6,6
E	M3x0,5	M4x0,7	M5x0,8	M6x1
Useful depth	6	8	10	12
EA	9	12	16	18
EB	24	30	38	46
F	M5x0,8	M5x0,8	M5x0,8	M5x0,8
FA	3	8	2	14
FB	7	7	8	8
FC	23	25	32	42
G	23,5	28,5	37	45
GB	6	7	9	12
GC	3	4	5	6
GD	4	5	8	10
GL	6	8	10	12
LA	58	69	86	107
LB	30	38	48	58
LC	15	20	26	30
N	4	4	5	5
Useful depth	3	3	4	4
NA	9	15	19	23
ØM ^{H9}	11	17	21	26
ØNB ^{H9}	3	3	4	4
P	2	2,5	3	3
PA	13	18	20	24
Weight (g)	70	150	320	550








PNEUMATIC ACTUATION

Operating criteria

Gripping force 5 bar (Nm)



Bore	Ø10	Ø16	Ø20	Ø25
(Nm)	0,16	0,54	1,1	2,28

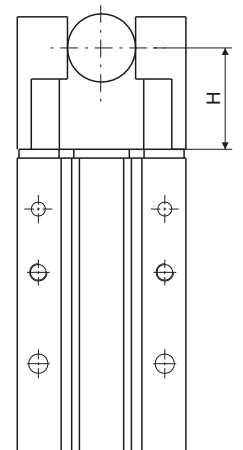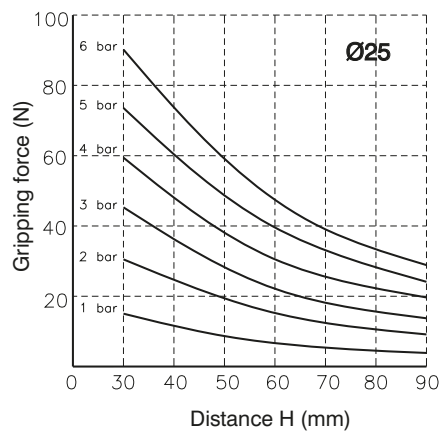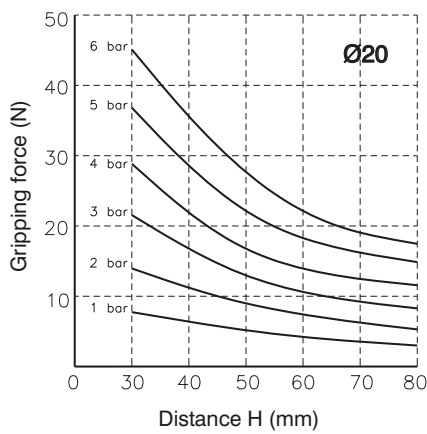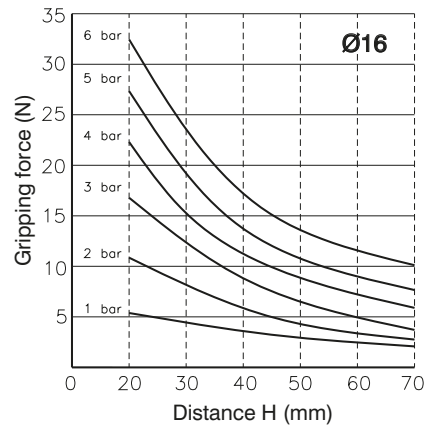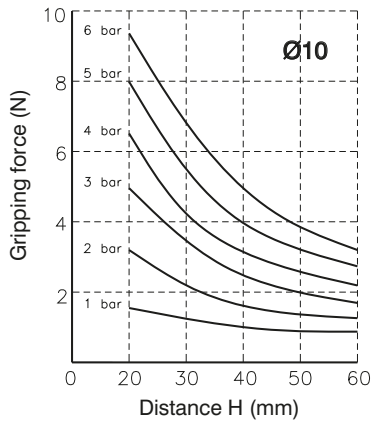

3

PNEUMATIC ACTUATION

Confirmation of Holding point

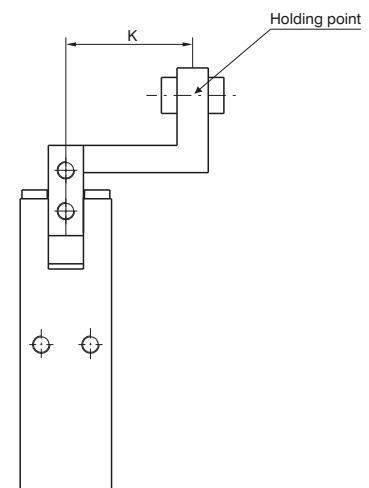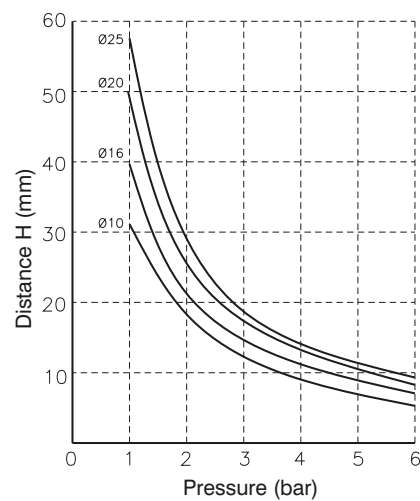

Applications where the holding point is outside the recommended parameters shown on the above graph might affect the product life.



► **180° angular gripper rack & pinion style**



Ordering code

6303.Ø.D

F = Fingers, end fixing
 L = Fingers, side fixing

- 20
- 25
- 32
- 40
- 50



Construction characteristics

Body	anodised aluminium
Piston	aluminium
Fingers	steel
End cap	anodised aluminium





Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	1.5 - 7 bar
Working temperature	-5C° - +70C°
Opening total stroke	-5° - 180°
Maximum operating frequency	from Ø20 to Ø25, 60 cycles/minute from Ø32 to Ø50, 30 cycles/minute

Overall dimensions

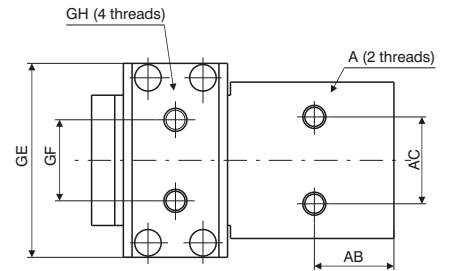

Bore		Ø20	Ø25	Ø32	Ø40	Ø50
A		M5	M6	M6	M8	M10
	Useful depth	7	10	10	15	20
AB		17	20	21	27,5	36
AC		20	24	24	30	40
D		M5	M6	M6	M8	M10
	Useful depth	10	12	12	16	20
DA		27	34	42	54	70
DB		35	40	47	56,5	69
DC		18	24	30	40	56
DD		23	27	29	37,5	48
DE		45	51	61,5	75,5	96
E		M5	M6	M6	M8	M10
	Useful depth	10	12	12	15	20
EA		26	30	30	36	40
EB		26	30	45	60	80
F		M5	M5	G1/8	G1/8	G1/4
FA		12	16	20	20	30
FB		9	10	13	14	16
FC		20	23	25	33,5	44
G		23	27	32	42	58
GA		7	8	9	12	17
GB		2	2	2	3	4
GC		12	17	23	30	44
GD		16	21	27	36	52
GE		41	45	51	67	85
GF		18	20	20	28	38
GH		M4	M5	M6	M8	M10
H		5	6	7	9	13
HA		10	12	14	21	24
HB		5	6	7	10	13
HC		28	30	34	44	58
HD		14	16	18	24	30
LA		60	69	83,5	104,5	136
LB		36	45	58	80	112
LC		36	40	45	56	66
ØM ^{H9}		21	26	34	42	52
	Useful depth	3	3	4	4	5
P		6	5,5	5,5	6	6
PD		4	4,5	11	10	13
Weight (g)		300	500	900	2100	5000

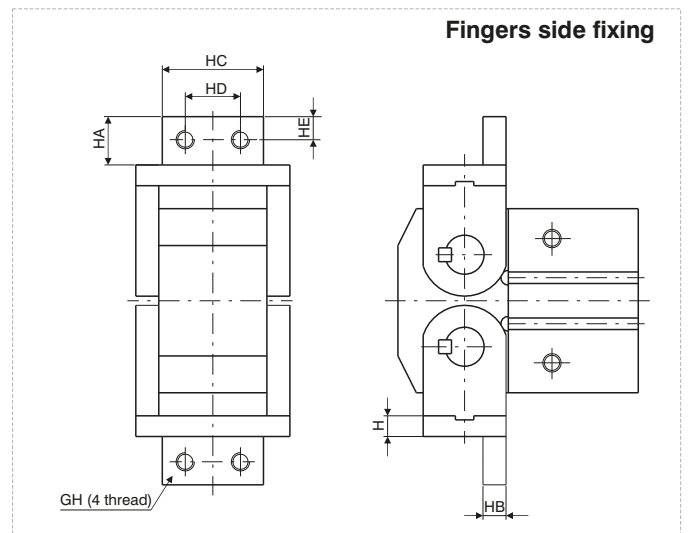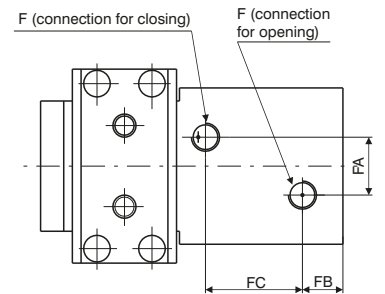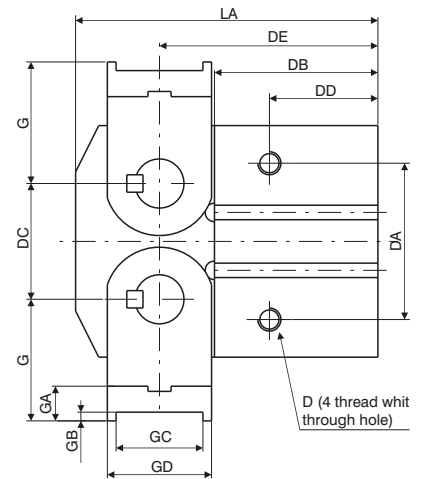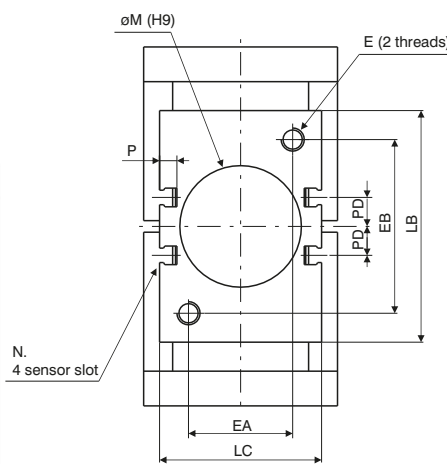









Operating criteria

Gripping force

NOTE:

Bore selection should be made considering a holding force 10 to 20 times the component weight.
 In case of acceleration/deceleration a further margin of safety should be considered.

Bore	Ø20	Ø25	Ø32	Ø40	Ø50
(Nm)	0,3	0,7	1,6	3,7	8,3

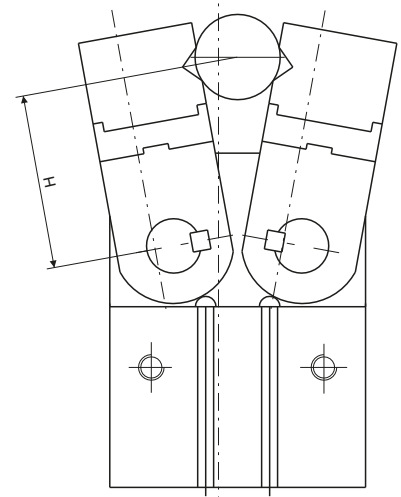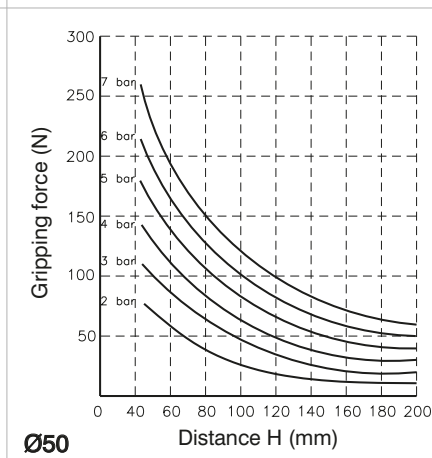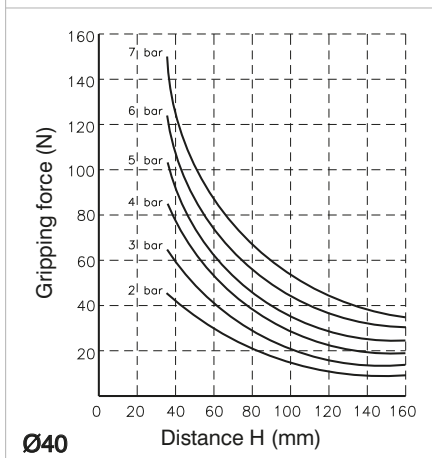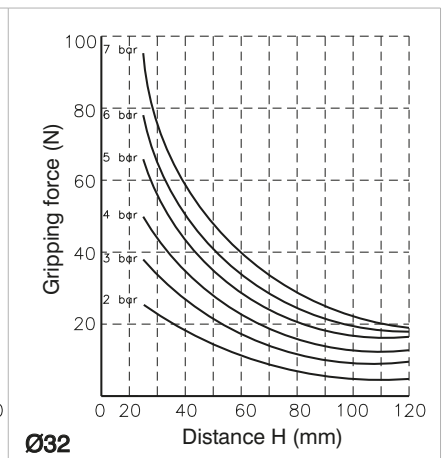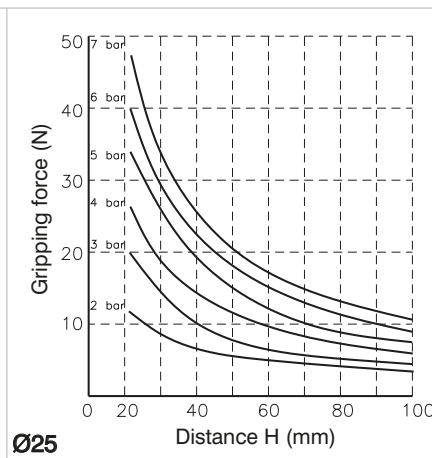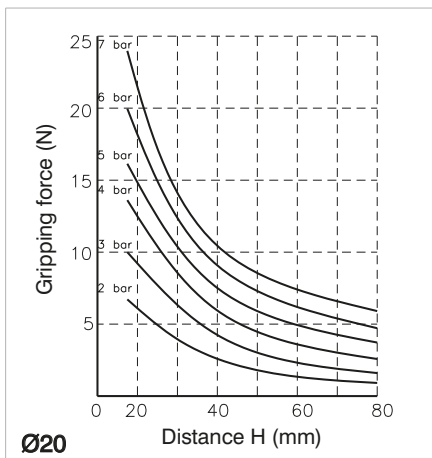

PNEUMATIC ACTUATION



▶ Parallel style pneumatic grippers - Standard version



Ordering code

6310.Ø

- 10
 - 16
 - 20
 - 25
- D** = Double acting
NC = Single acting (normally closed)
NO = Single acting (normally open)




Construction characteristics

Body	anodised aluminium
Piston	aluminium or stainless steel (depending on the bore)
Fingers	steel
End cap	anodised aluminium
Seals	oil resistant NBR rubber


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	double acting : 2 - 7 bar (for $\varnothing 10$) - 1 - 7 (for other bores) single acting : 3.5 - 7 bar (for $\varnothing 10$) - 2.5 - 7 (for other bores)
Operating temperature	-5°C - +70°C
Maximum operating frequency	from $\varnothing 10$ to $\varnothing 25$, 180 cycles/minute

Overall dimensions

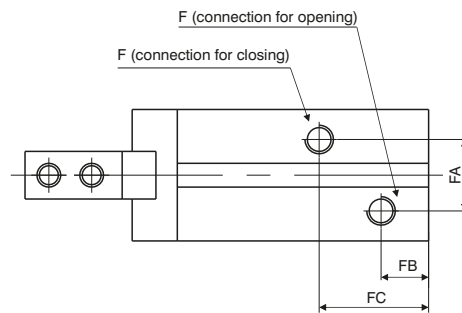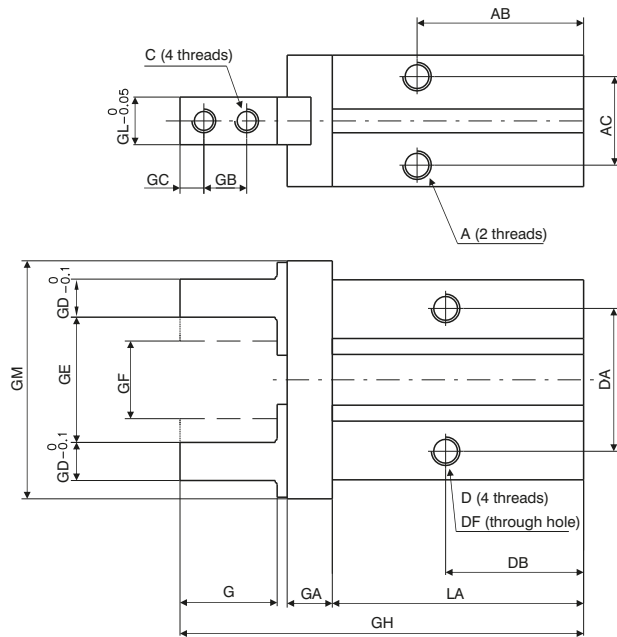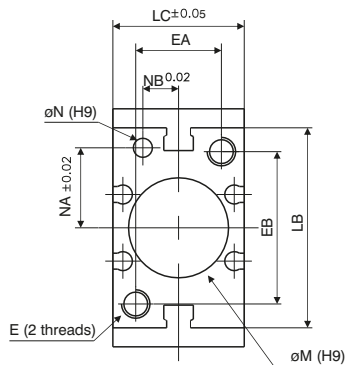


Bore		Ø10	Ø16	Ø20	Ø25
A		M3x0,5	M4x0,7	M5x0,8	M6x1
	Useful depth	6	4,5	8	10
AB		27	30	35	36,5
AC		11,4	16	18,6	22
C		M2,5x0,45	M3x0,5	M4x0,7	M5x0,8
D		M3x0,5	M4x0,7	M5x0,8	M6x1
	Useful depth	5,5	8	10	12
DA		16	24	30	36
DB		23	24,5	29	30
ØDF		2,6	3,4	4,3	5,1
E		M3x0,5	M4x0,7	M5x0,8	M6x1
	Useful depth	6	8	10	12
EA		12	15	18	22
EB		18	22	32	40
F		M3x0,5	M5x0,8	M5x0,8	M5x0,8
FA		11	13	15	20
FB		9	7,5	10	10,7
FC		19	19	23	23,5
G		12	15,5	20	25
GA		6	7,5	9,5	11
GB		5,7	7	9	12
GC		3	4	5	6
GD		4	5	8	10
GE		15,2	20,9	26,3	33,3
GF		11,2	14,9	16,3	19,3
GH		57	67,5	84,8	102,7
GL		5	8	10	12
GM		29	38	50	63
LA		37,8	42,5	52,8	63,6
LB		23	30,6	42	52
LC		16,4	23,6	27,6	33,6
ØM ^{H9}		11	17	21	26
	Useful depth	2	2	3	3,5
ØN ^{H9}		2	3	4	4
	Useful depth	3	3	4	4
NA		7,6	11	16,8	21,8
NB		5,2	6,5	7,5	10
P		5,4	5,8	9	11,5
PA		/	11,6	14	19
PP		/	2,1	2,1	3,5
Weight (g)		55	120	230	425

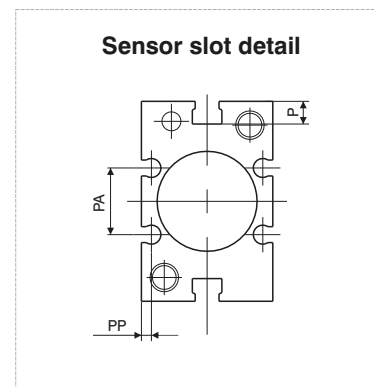


Ø16 - Ø25

Sensor slot detail type "C"



Ø10 - Ø25

Sensor slot detail type "B"




Operating criteria


Holding force (N) (pressure 5 bar, holding point H=20 half stroke)

Version	Force	Bore			
		Ø10	Ø16	Ø20	Ø25
Double acting	Fe	9,8	30	42	65
	Fi	17	40	66	104
Single acting	N.O. Fe	6,3	24	28	45
	N.C. Fi	12	31	56	83


Fe = external holding force Fi = internal holding force



EXTERNAL HOLD



INTERNAL HOLD

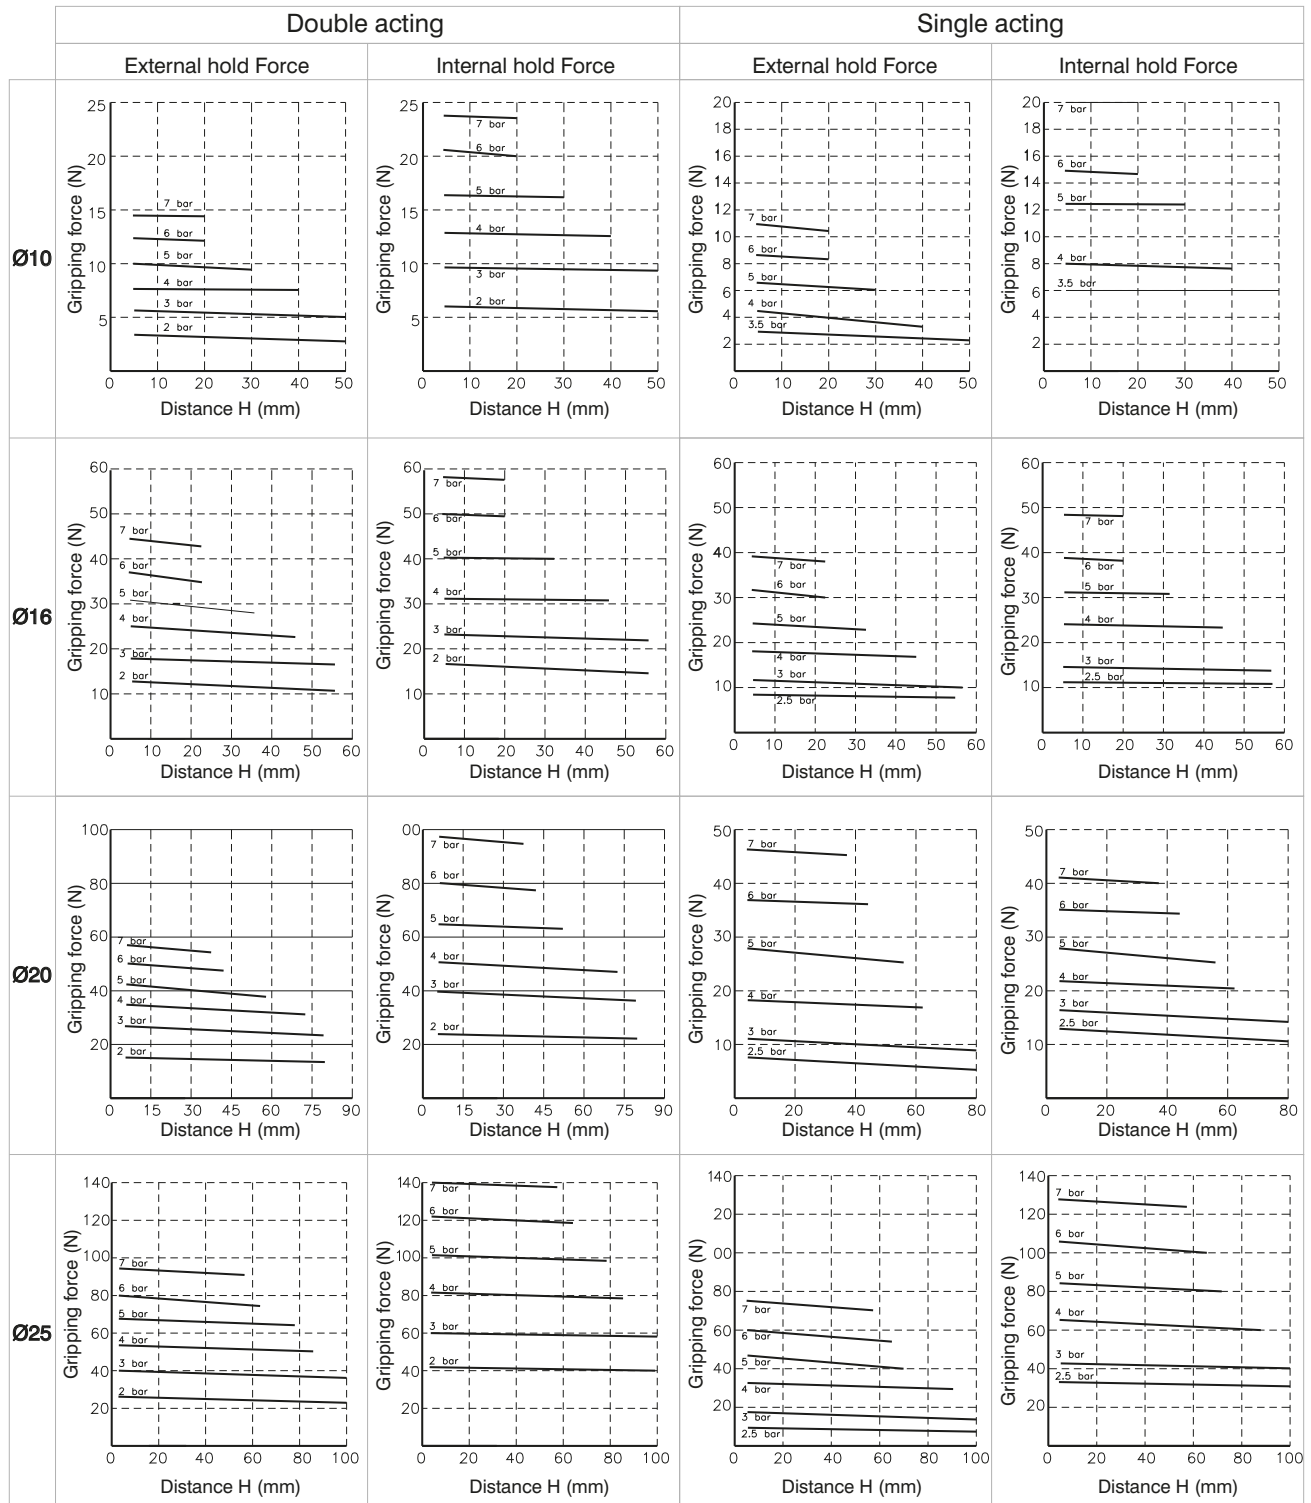



Parallel style pneumatic grippers - Wide opening



Ordering Code

6311.Ø.D.	10	16	20	25	32	40	Ordering code options	Stroke					
								20	30	40	50	70	100
							1	40	60	80	100	120	160
							2	60	80	100	120	160	200
								Ø10	Ø16	Ø20	Ø25	Ø32	Ø40
								Bore					

Construction characteristics

Body	anodised aluminium
Piston	aluminium
Fingers	anodised aluminium
Rod	steel
Rack	steel
Pinion	steel


Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	Ø10: 1.5 - 6 bar - Ø16 - 40: 1 - 6 bar
Working temperature	-5°C - +70°C

Model	Diameter (mm)	Max.operating frequency cycles/min.	Model	Diameter (mm)	Max.operating frequency cycles/min.
6311.10.D	10	60	6311.25.D	25	60
6311.10.D.1		40	6311.25.D.1		40
6311.10.D.2			6311.25.D.2		
6311.16.D	16	60	6311.32.D	32	30
6311.16.D.1		40	6311.32.D.1		20
6311.16.D.2			6311.32.D.2		
6311.20.D	20	60	6311.40.D	40	30
6311.20.D.1		40	6311.40.D.1		20
6311.20.D.2			6311.40.D.2		

3 PNEUMATIC ACTUATION



Overall dimensions

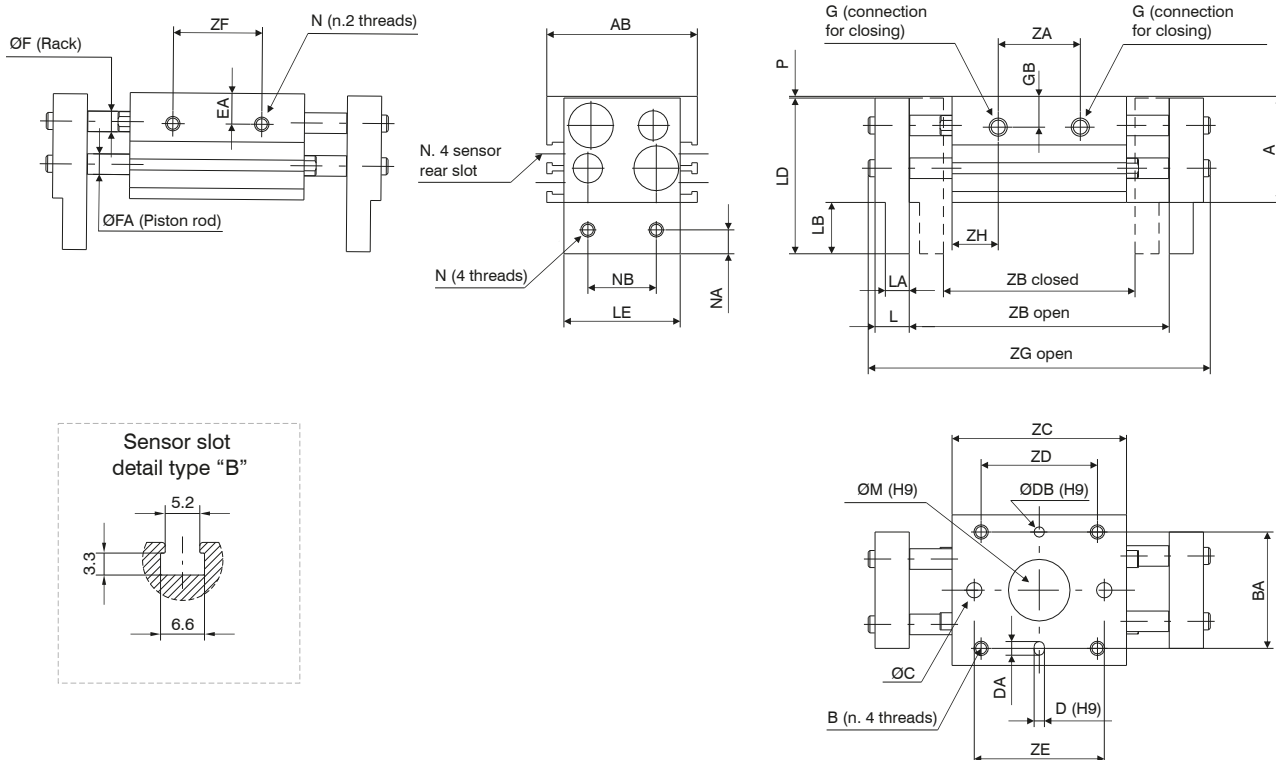

Bore	Ø10	Ø16	Ø20	Ø25	Ø32	Ø40													
A	31	39	46	52	68	79													
AB	44	55	65	76	82	98													
B	M4x0,7	M5x0,8	M6x1	M8x1.25	M8x1.25	M10x1.5													
Useful depth	8	10	12	16	16	20													
BA	34	42	52	62	64	76													
ØC	4,5	5,5	6,6	9	/	/													
D ^{H9}	3	3	4	4	6	6													
Useful depth	3	3	4	4,5	8	8													
DA	4	4	5	5	7	7													
ØDB ^{H9}	3	3	4	4	6	6													
Useful depth	3	3	4	4,5	8	8													
E	M4x0,7	M5x0,8	M6x1	M8x1.25	M8x1.25	M10x1.5													
Useful depth	5	7	7	7	11	16													
EA	9	10	11	12,5	22	28													
ØF	6	8	10	12	14	16													
FA	6	8	10	12	16	20													
G	M5x0,8	M5x0,8	M5x0,8	M5x0,8	G1/8	G1/8													
GB	9	10	11	16	16	18													
L	10	13	17	21	24	28													
LA	7	9	12,5	14	15	18													
LB	15	19	24	29	32	38													
LD	45,5	57,5	69	80	100	117													
LE	34	43	54	64	70	86													
ØM ^{H9}	18	23	27	32	35	40													
Useful depth	1,5	1,5	1,5	1,5	1,5	1,5													
N	M4x0,7	M5x0,8	M6x1	M8x1,25	M10x1,5	M10x1,5													
NA	7	8	10	12	15	18													
NB	20	25	30	40	50	60													
P	0,5	0,5	1	1	1	1													
ZA	24	39	57	26	50	70	32	68	88	38	86	104	54	104	148	72	130	170	
ZB	closed	56	78	96	68	110	130	82	142	162	100	182	200	150	198	242	188	246	286
open	76	118	156	98	170	210	122	222	262	150	282	320	220	318	402	288	406	486	
ZC	51	67	85	60	90	110	71	113	133	88	142	160	110	158	202	148	206	246	
ZD	36	52	70	45	75	95	58	100	120	70	124	142	86	134	178	116	174	214	
ZE	38	54	72	40	70	90	54	96	116	66	120	138	/	/	/	/	/	/	
ZF	26	42	60	28	58	78	38	80	100	48	102	120	60	108	152	80	138	178	
ZG	open	100	142	180	128	200	240	160	260	300	196	328	366	272	370	454	348	466	546
ZH	13,5	14	14	17	20	20	19,5	22,5	22,5	25	28	28	28	27				38	
Weight (g)	280	350	430	600	800	950	1000	1500	1700	1700	2500	2800	2800	2900	3800	4700	5300	6850	7900
	20	40	60	30	60	80	40	80	100	50	100	120	70	120	160	100	160	200	
	Stroke																		

Operating criteria

Holding force

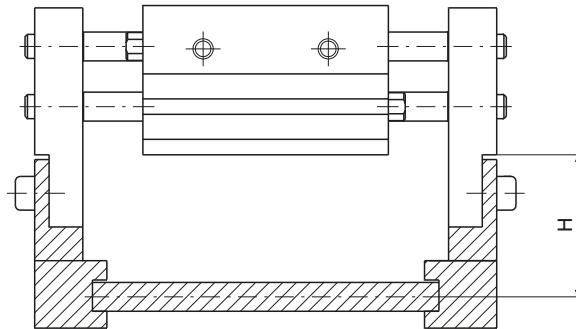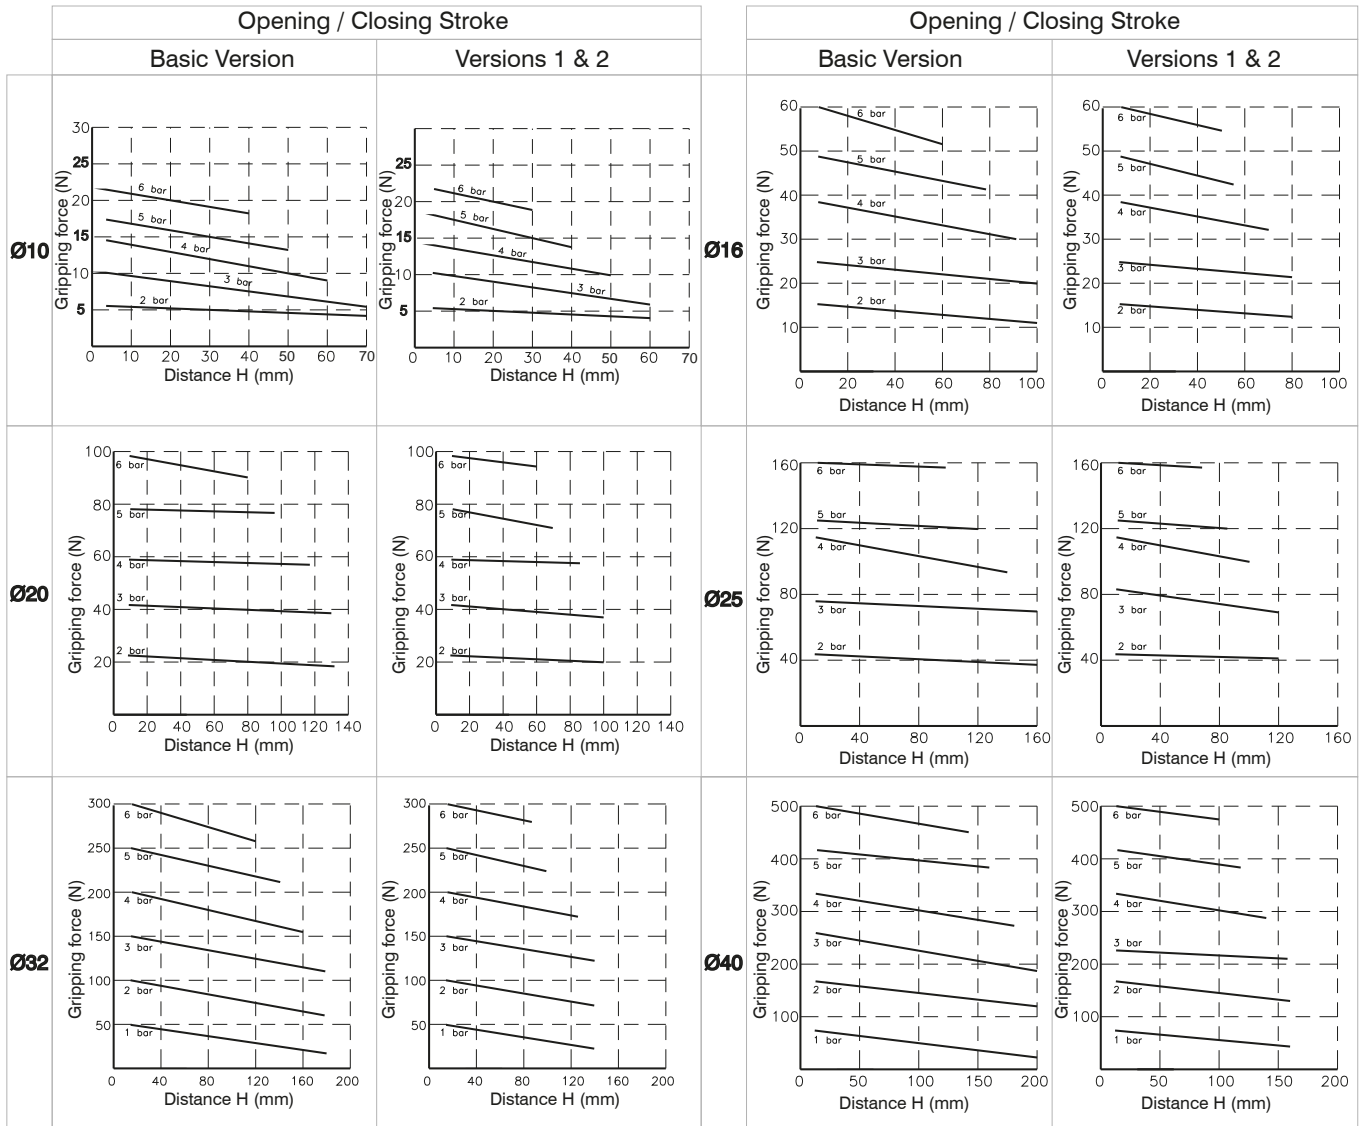

PNEUMATIC ACTUATION

► 3 finger parallel style pneumatic grippers



Ordering code

6312.Ø.D

- 16
- 20
- 25
- 32
- 40
- 50
- 63
- 80
- 100
- 125


Construction characteristics

Body	aluminium
Piston	aluminium
Wedge	steel
Fingers	steel




Operational characteristics

Function	double acting
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	2 - 6 bar (Ø16 - Ø20 - Ø25) - 1 - 6 bar (Ø32 - Ø125)
Working temperature	-5°C - +70°C
Maximum operating frequency	from Ø 16 to Ø 25, 120 cycles/minute from Ø 32 to Ø 63, 60 cycles/minute from Ø 80 to Ø 125, 30 cycles/minute

Overall dimensions Ø16 - Ø25

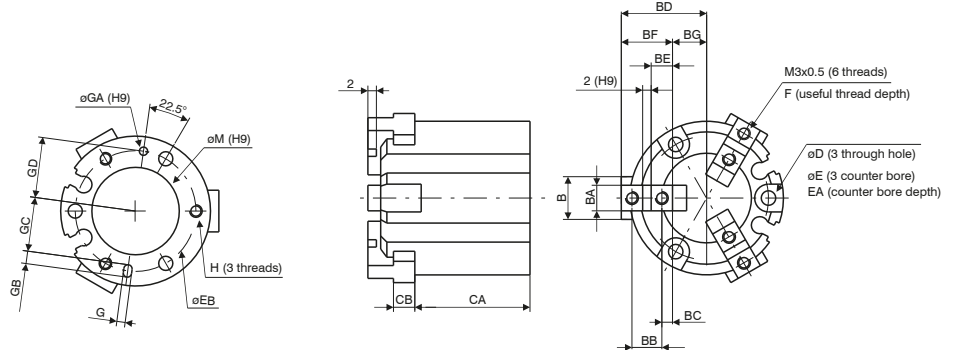

Bore	Ø16	Ø20	Ø25
ØA	30	36	42
AB	32	35	37
AC	35	38	40
B	8	10	12
BA ^{H9}	5	6	6
BB	6	7	8
BC	2	2,5	3
BD	open	17	20
	close	15	18
BE	4	5	6
BF	10	12	14
BG	open	7	8
	close	5	6
CA	25	27	28
CB	4	5	5
D	3,4	3,4	4,5
E	6,5	6,5	8
EA	8	9,5	10
EB	25	29	34
F	5	6	6
G ^{H9}	2	2	3
	Useful depth	2	3
ØGA ^{H9}	2	2	3
	Useful depth	2	3
GB	3	3	5
GC	11	13	14,5
GD	12,5	14,5	17
H	M3x0,5	M3x0,5	M4x0,7
	Useful depth	4,5	6
ØM ^{H9}	17	21	26
	Useful depth	1,5	1,5
N	M3x0,5	M5x0,8	M5x0,8
NA	11	13	15
Weight (g)	62	98	139

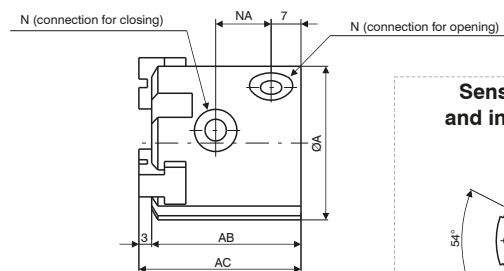




Pneumatic grippers


Series 6312 - 3 fingers parallel style pneumatic grippers (air chuck)

Overall dimensions Ø32 and Ø80

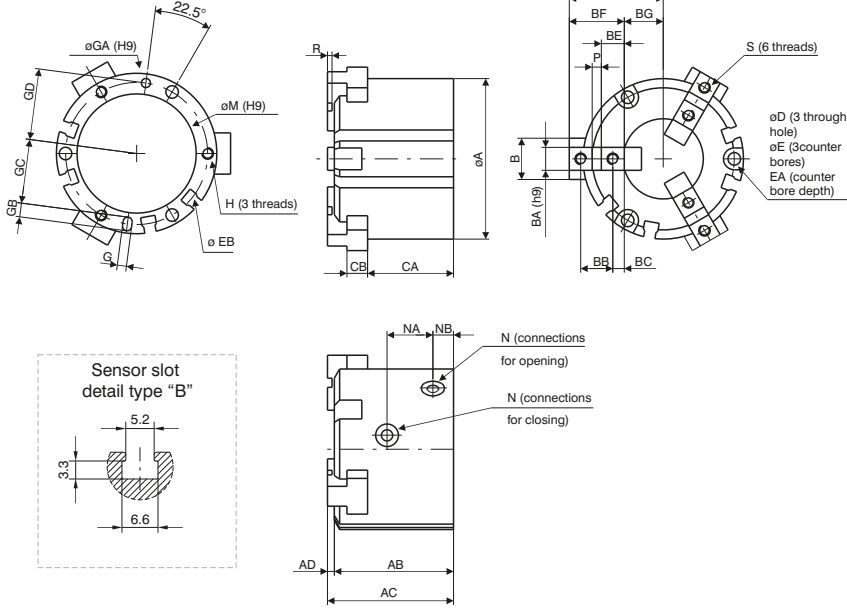


Bore	Ø32	Ø40	Ø50	Ø63	Ø80
ØA	52	62	70	86	106
AB	41	44	52	62	77
AC	44	47	55	66	82
AD	3	3	3	4	5
B	14	16	18	24	28
BA ^{H9}	8	8	10	12	14
BB	11	12	14	17	20
BC	4,5	4,5	5	5,5	6
BD	open: 32	open: 35	open: 41	open: 51	open: 63,5
BD	close: 28	close: 31	close: 35	close: 43	close: 53,5
BE	9	9	10	11	12
BF	20	21	24	28	32
BG	open: 12	open: 14	open: 17	open: 23	open: 31,5
BG	close: 8	close: 10	close: 11	close: 15	close: 21,5
CA	30,5	32	37,5	44	56
CB	6	7	9	11	12
D	4,5	5,5	5,5	6,6	6,6
E	8	9,5	9,5	11	11
EA	9	9	12	14	19
EB	44	53	62	76	95
H	M4x0,7	M5x0,8	M5x0,8	M6x1	M6x1
H	Useful depth: 6	Useful depth: 7,5	Useful depth: 10	Useful depth: 9	Useful depth: 12
G ^{H9}	3	4	4	5	6
G ^{H9}	Useful depth: 3	Useful depth: 4	Useful depth: 4	Useful depth: 5	Useful depth: 6
ØGA ^{H9}	3	4	4	5	6
ØGA ^{H9}	Useful depth: 3	Useful depth: 4	Useful depth: 4	Useful depth: 5	Useful depth: 6
GB	5	6	6	7	8
GC	19,5	23,5	28	34,5	43,5
GD	22	26,5	31	38	47,5
N	M5x0,8	M5x0,8	M5x0,8	M5x0,8	G1/8
ØM ^{H9}	34	42	52	65	82
ØM ^{H9}	Useful depth: 2	Useful depth: 2	Useful depth: 2	Useful depth: 2,5	Useful depth: 3
NA	16	17	20	22	27
NB	8	9	9	12	13,5
P ^{H9}	2	3	4	6	8
R	2	2	2	3	4
S	M4x0,7	M4x0,7	M5x0,8	M5x0,8	M6x1
S	Useful depth: 8	Useful depth: 8	Useful depth: 10	Useful depth: 10	Useful depth: 12
Weight (g)	240	354	542	1000	1850

Sensor slots detail and inlet connections




Overall dimensions Ø100 and Ø125

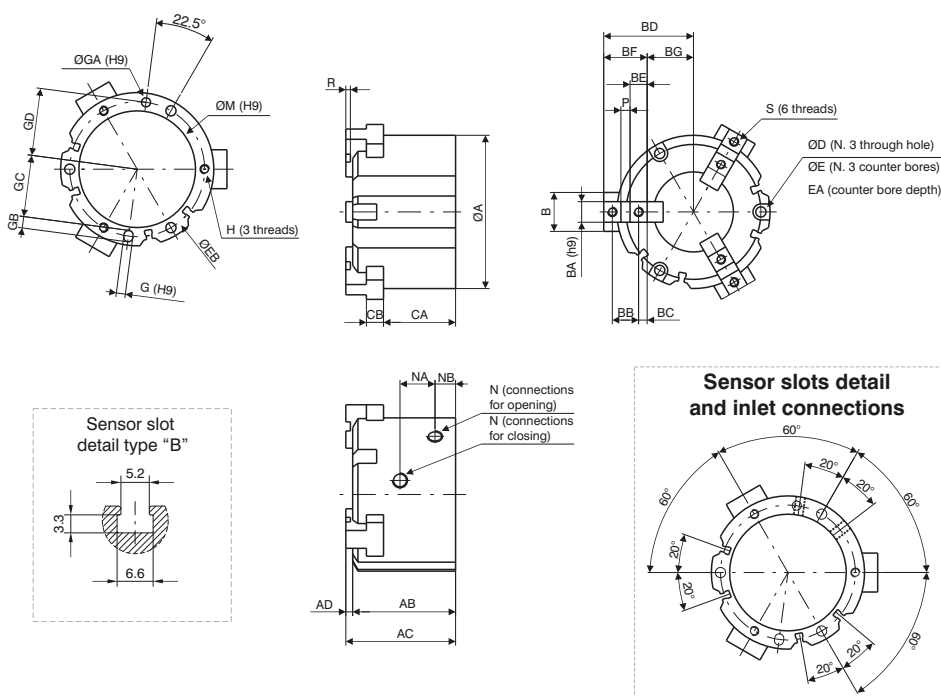

Bore	Ø100	Ø125
ØA	134	166
AB	90	114
AC	96	122
AD	6	8
B	34	40
BA ^{H9}	18	22
BB	23	31
BC	7,5	10,5
BD	open: 78	open: 98
BD	close: 66	close: 82
BE	15	21
BF	38	52
BG	open: 40	open: 46
BG	close: 28	close: 30
CA	63	84
CB	15	18
ØD	9	11
ØE	14	17,5
EA	21	34
EB	118	148
G ^{H9}	8	10
G ^{H9}	Useful depth: 6	Useful depth: 8
ØGA ^{H9}	8	10
ØGA ^{H9}	Useful depth: 6	Useful depth: 8
GB	10	12
GC	54	68
GD	59	74
H	M8x1,25	M10x1,5
H	Useful depth: 16	Useful depth: 20
ØM ^{H9}	102	130
ØM ^{H9}	Useful depth: 4	Useful depth: 6
N	G1/4	G3/8
NA	30,6	38
NB	18	23,5
P ^{H9}	8	10
R	4	6
S	M8x1,25	M10x1,5
S	Useful depth: 16	Useful depth: 20
Weight (g)	3360	6430

PNEUMATIC ACTUATION

Gripping force (N)

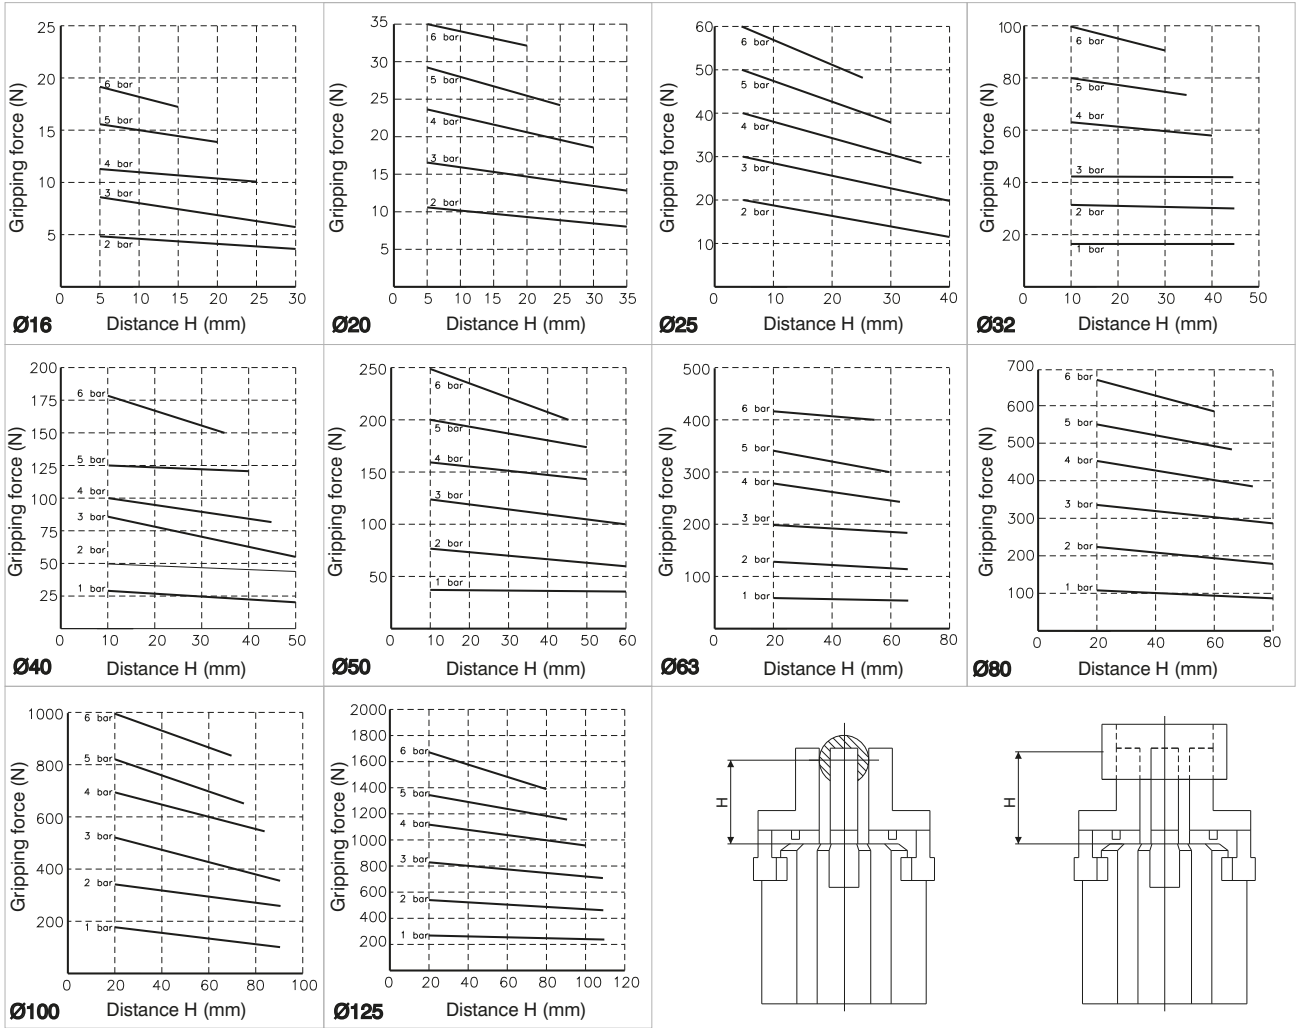

3 PNEUMATIC ACTUATION



Series 6400 - Rotary actuators

General

These rotary actuators convert linear motion of a piston into a rotary motion via a rack and pinion device, using a single pinion-rack system for the 6411 version and a double system on 6400 versions. The 6410 series actuators have fixed stops at 90 and 180 degrees; while on the 6400 series, rotation can be adjusted between 0 and 190 degrees using variable stops that can also be substituted with hydraulic stoppers (shock absorbers). These devices are equipped with a rotating table upon which the load is fixed.

► **Double rack rotary actuators with turn table**



Ordering code

6400. . . .

- A** = Standard
- R** = Cushioning (shock absorber)
- 10** (piston $\varnothing 15$)
- 30** (piston $\varnothing 20$)
- 50** (piston $\varnothing 25$)
- 100** (piston $\varnothing 32$)
- 200** (piston $\varnothing 40$)


Construction characteristics

Body	anodised aluminium
End cap	anodised aluminium
Piston seal	NBR rubber
Pinion	steel
Rack	steel
Turn table	anodised aluminium
Cushioning	elastic bumper (hydraulic damper available on request)

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.)
Max. pressure	10 bar (for type 100 and 200, 6 bar)
Working temperature	-5°C - +70°C
Rotation angle range	0 - 190°
Max. rotation	190°
Rotation speed	s/90° (see rotation time table)

Overall dimensions

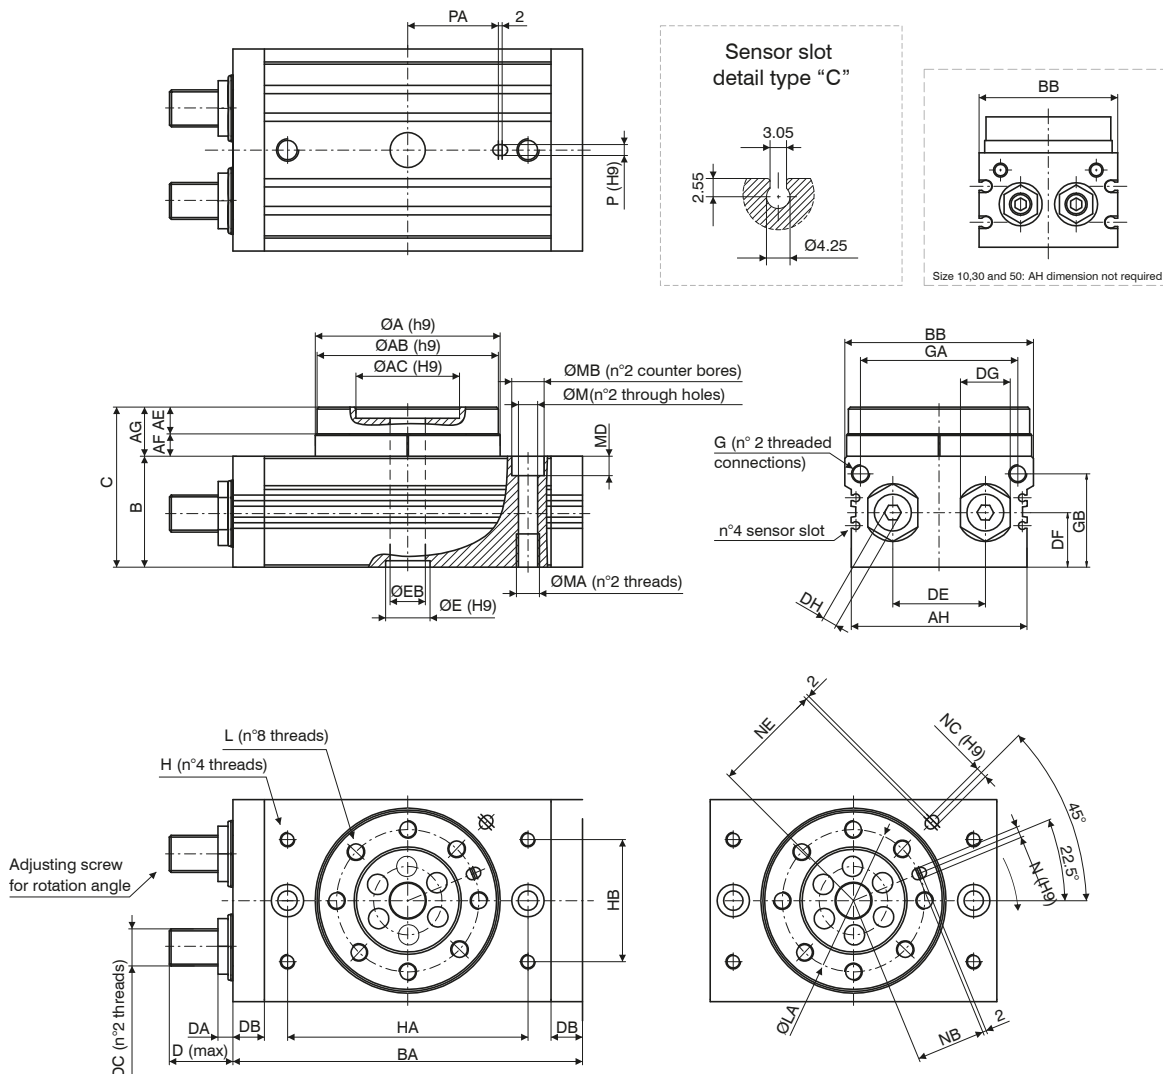


Size	10	30	50	100	200
Ø piston	Ø15	Ø21	Ø25	Ø32	Ø40
ØA ^{h9}	46	67	77	100	118
ØAB ^{h9}	45	65	75	98	116
ØAC ^{H9}	20	32	35	56	64
Useful depth	4	4,5	5	6	9
AE	8	10	12	14,5	16,5
AF	5	7	8	12,5	15,5
AG	13	17	20	27	32
AH	/	/	/	95	114
B ^{+0,5/0}	34	40	46	59	74
BA	92	127	152	189	240
BB ^{+0,5/0}	50	70	80	102	120
C ^{+0,5/0}	47	57	66	86	106
D	17,7	25	31,4	34,3	40,2
DA	8,6	10,6	14	8	20
DB	9,5	12	15,5	17	24
DC	M8x1	M10x1	M14x1,5	M20x1,5	M27x1,5
DE	20	29	38	50	60
DF	15,5	18,5	22	29,5	36,5
DG	12	14	19	27	36
DH	4	5	6	8	10
ØE ^{H9}	15	22	26	24	32
Useful depth	3	3	3	3,5	5,5
ØEB	5	9	10	19	24
G	M5x0,8	G1/8	G1/8	G1/8	G1/8



Size	10	30	50	100	200
Ø piston	Ø15	Ø21	Ø25	Ø32	Ø40
GA	34,5	50	63	85	103
GB	27,8	32	37,5	50,5	65,5
H	M5x0,8	M6x1	M8x1,25	M8x1,25	M12x1,75
Useful depth	8	8	8	10	13
HA	60	84	100	130	150
HB	27	37	50	66	80
L	M5x0,8	M6x1	M8x1,25	M10x1,5	M12x1,75
Useful depth	8	10	12	14,5	16,5
LA	32	48	55	77	90
M	6,8	8,6	10,5	10,4	14,2
MA	M8x1,25	M10x1,5	M12x1,75	M12x1,75	M16x2
Useful depth	12	15	18	18	25
MB	11	14	18	17,5	20
MD	6,5	8,5	10,5	10,5	12,5
N ^{H9}	3	4	5	6	8
Useful depth	3,5	4,5	5,5	6,5	8,5
NB	15	23	26,5	37,5	44
NC ^{H9}	/	/	/	6	8
Useful depth	/	/	/	4,5	4,5
NE	/	/	/	59	69
P ^{H9}	/	/	/	6	8
Useful depth	/	/	/	4,5	6,5
PA	/	/	/	49	54
Weight (g)	530	1230	2080	4100	7650

Permissible Loads

		Size				
		10	30	50	100	200
Radial Load (N)		80	200	320	400	550
Axial Load (N)	Fc	80	370	450	710	1000
	Ft	75	200	300	500	750
Torque Moment (Nm)		2,5	5,5	9,5	18	25

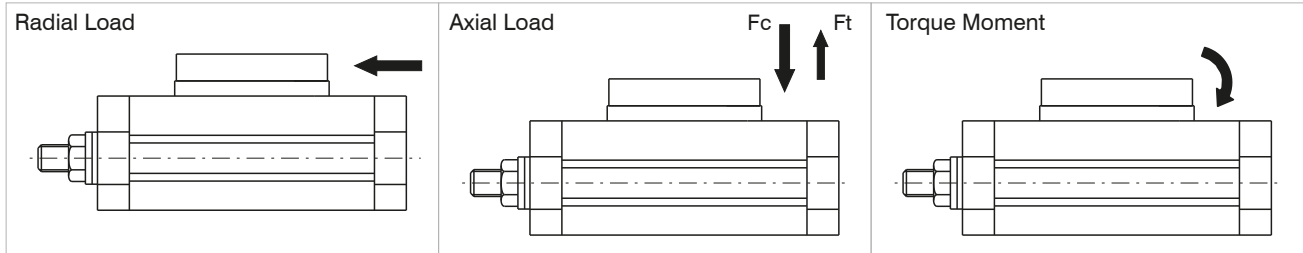

Torque Diagrams

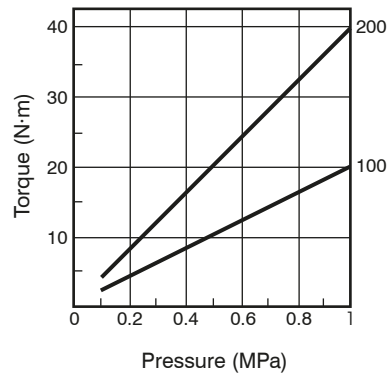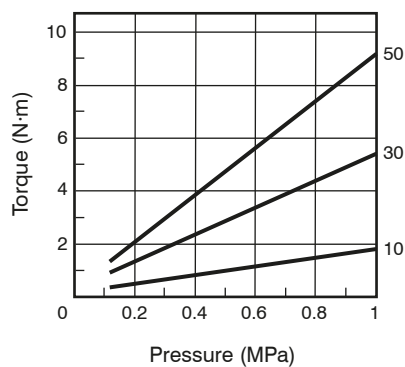

Rotation time (sec./90°)

Dimension	With adjusting screw	With hidraulic decelerator
10 - 30 - 50	0.2 - 1	0.2 - 0,7
100	0.2 - 2	0.2 - 1
200	0.2 - 2.5	0.2 - 1

Kinetic energy

Dimension	With adjusting screw	With hidraulic decelerator
10	0.006	Please apply to our tech-dpt for info (as general rule expressed valves can be multiplied by 3)
30	0.045	
50	0.08	
100	0.30	
200	0.52	

► Single rack rotary actuators



Ordering code

6411.Ø.
 — 50 — 90 = rotation 90°
 — 63 — 180 = rotation 180°
 — 80
 — 100


Construction characteristics

Body	anodised aluminium
Piston	aluminium
End cap	anodised aluminium
Piston seal	NBR rubber
Pinion	steel
Rack	steel


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Max. pressure	10 bar
Working temperature	-5°C - +70°C
Rotation tolerance	0° - +4°


Overall dimensions Ø50 and Ø63

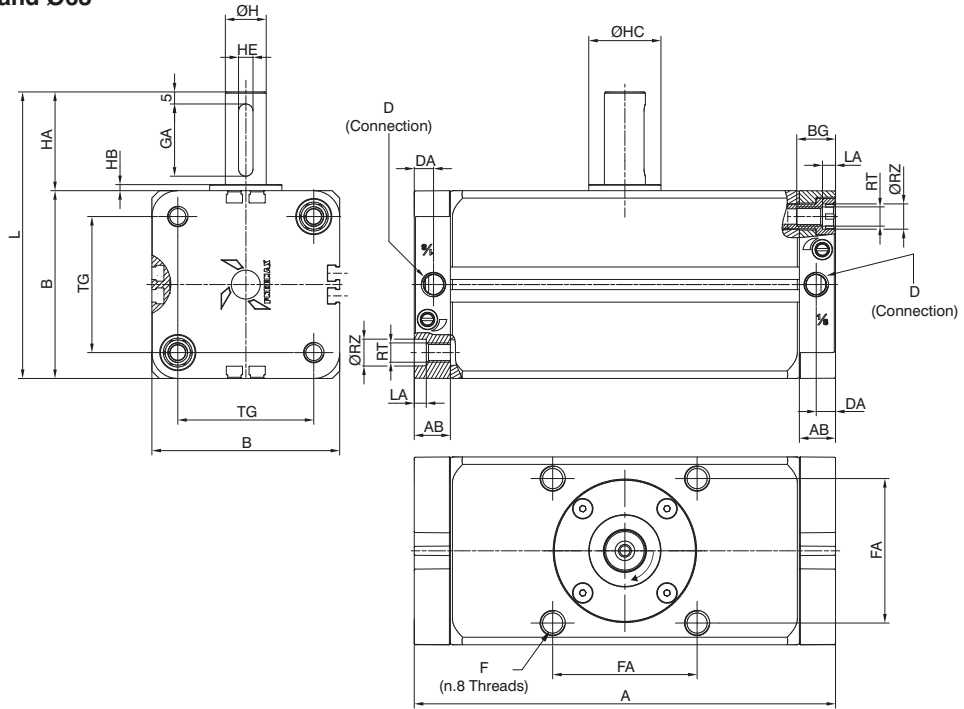

Overall dimensions Ø80 and Ø100

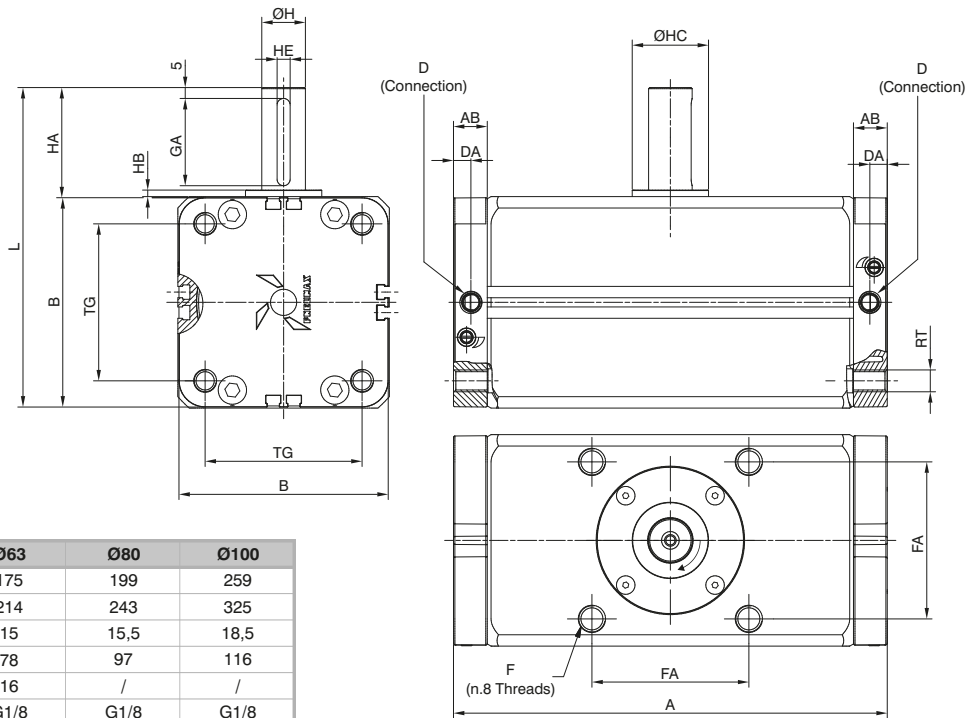


Bore		Ø50	Ø63	Ø80	Ø100
A	90°	156	175	199	259
	180°	189	214	243	325
AB		15	15	15,5	18,5
B		66	78	97	116
BG		16	16	/	/
D		G1/8	G1/8	G1/8	G1/8
DA		8	8	8	8
F		M8x1,25	M10x1,5	M12x1,75	M12x1,75
	Useful depth	12	15	15	18
FA		48	60	72	85
GA		25	30	40	45
H		15	17	20	25
HA		36	41	50	60
HB		2,5	2,5	3	4
HC		25	30	35	39,5
HE ^{HS}		5	6	6	8
L		102	119	147	176
LA		5	5	/	/
RT		M8	M8	M10	M10
RZ		10,5	10,5	/	/
TG		46,5	56,5	72	89
Weight (g ^r)	90°	1575	2451	4162	6989
	180°	1815	2823	4774	8329





Usable sensors code
1590.
LRS.
LHS.

Allowable Loads

	Bore			
	Ø50	Ø63	Ø80	Ø100
Radial load (N)	200	300	400	600
Axial Load in compression (N)	500	600	900	1000
Tensile Axial Load (N)	200			↑

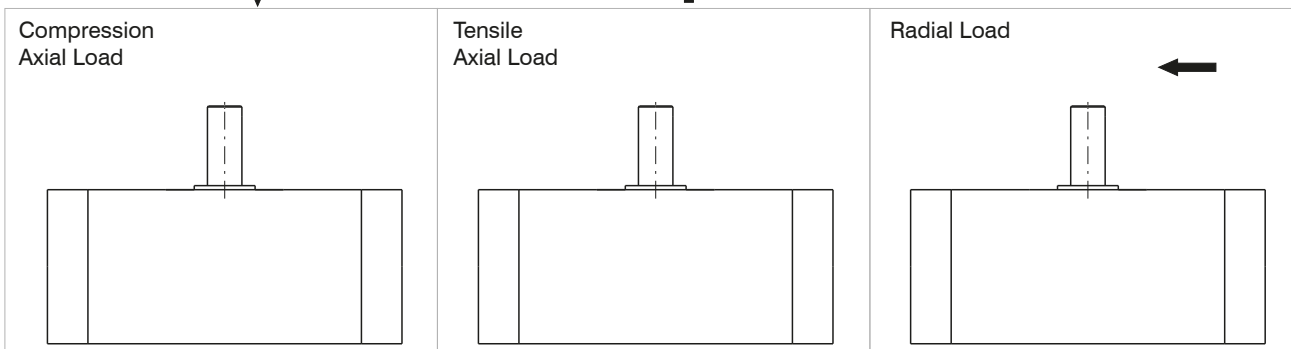





Torque Diagrams

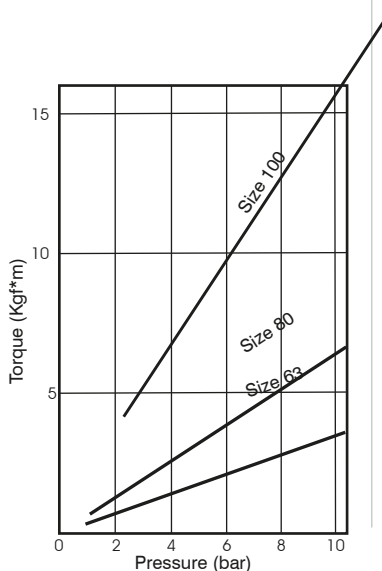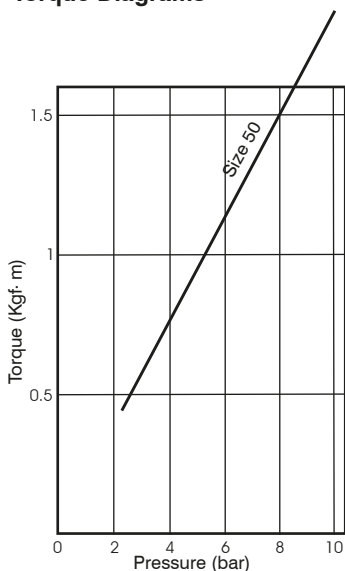

Max Kinetic energy (Kg·cm)
Kinetic energy (cushioning angle 35°)

Bore			
Ø50	Ø63	Ø80	Ø100
10	15	20	30

Rotation time according to inertial moments

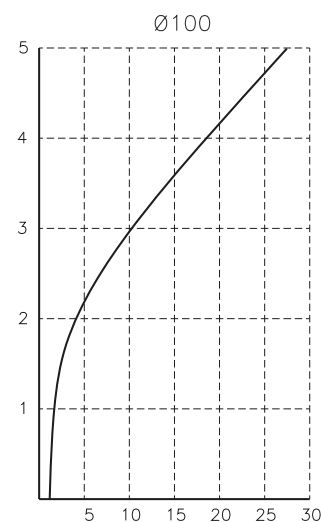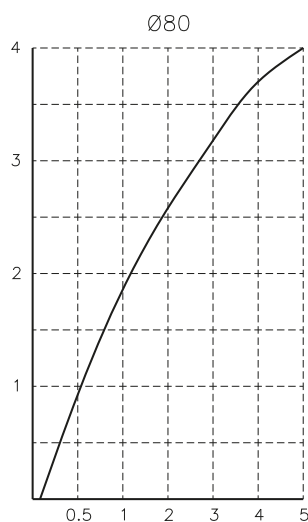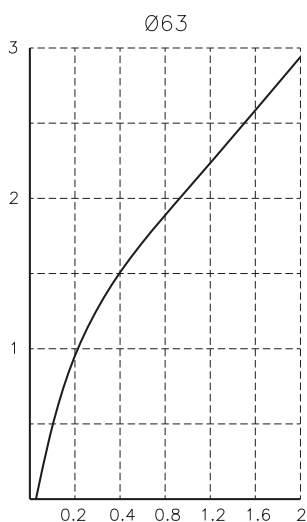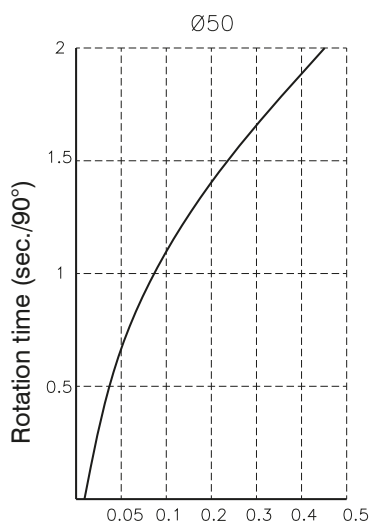

Inertial moments (Kg·cm·sec²)





Foot (MS1)

Ordering code

1540.Ø.05/1F

The kit comprises:
n°1 foot (plated zinc steel)
n°2 screws (plated zinc steel)

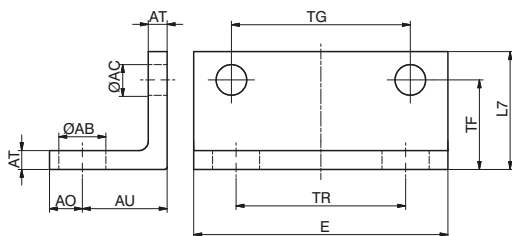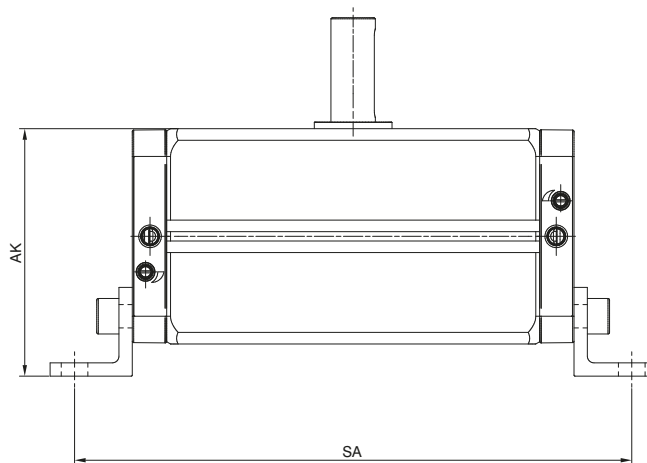

Bore	Ø50	Ø63	Ø80	Ø100
AK	78	89	111,5	132
SA	90°	198	217	251
	180°	231	256	295

► Vane type rotary actuators



General

The vane type rotary actuators, 6420 series is designed to operate at 90-180 or 270 deg. In a contained space. Dimensionally are more compact than other types of rotary actuators.

The range includes bore sizes from 10 to 100 in 4 configurations:

- basic.
- with rotary angle adjustment mechanism.
- with sensing support.
- with rotary angle adjustment mechanism and sensing support.

The bodies are in aluminium, the shafts in chrome plated steel and the seals in NBR.


The sensing support kit enables for the sensors to be positioned in any position.

The rotary angle adjustment mechanism enables the adjustment of the complete rotation on bore sizes 10 to 40 while on the others sizes carries as standard hydraulic dampers which enable the adjustment only of the last part of the rotation.

The units can be fixed using the thread on the body or the through holes on the body.

On bore sizes 50 to 100 the shaft runs into ball bearings which ensure high resistance. o rotante è guidato su cuscinetti a sfere che assorbono i carichi radiali e assiali, garantendo durata e affidabilità. assiali, garantendo durata e affidabilità.

Ordering code

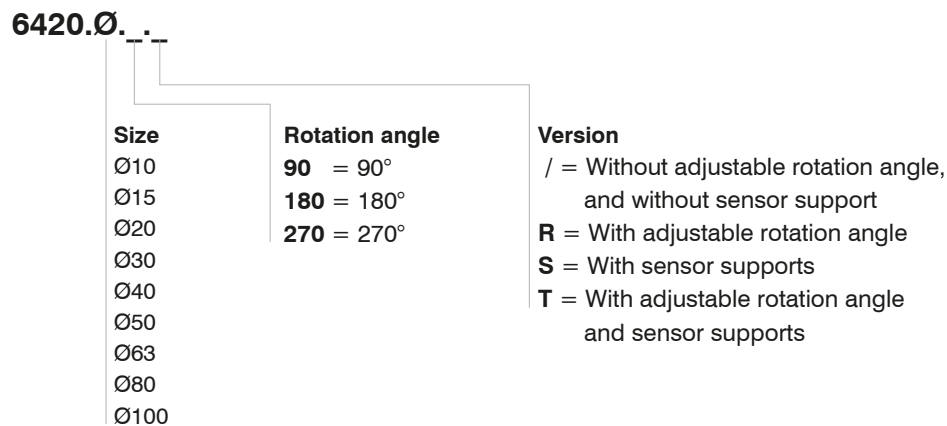



Construction characteristics

Body	anodised aluminium
Rod	steel
Seals	NBR
Vane	vulcanized NBR rubber on steel core
Cushoning	elastic bumper; hydraulic dampers from size Ø50 - Ø100 versions R or T


Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	1,5 - 7 bar
Temperature	0°C - 50°C
Rotation range	90° - 180° - 270°
Max. allowed leak	Ø10 - Ø40 = 0,3 NI/min / Ø50 - Ø100 = 0,5 NI/min

Overall dimensions Ø10 - Ø40

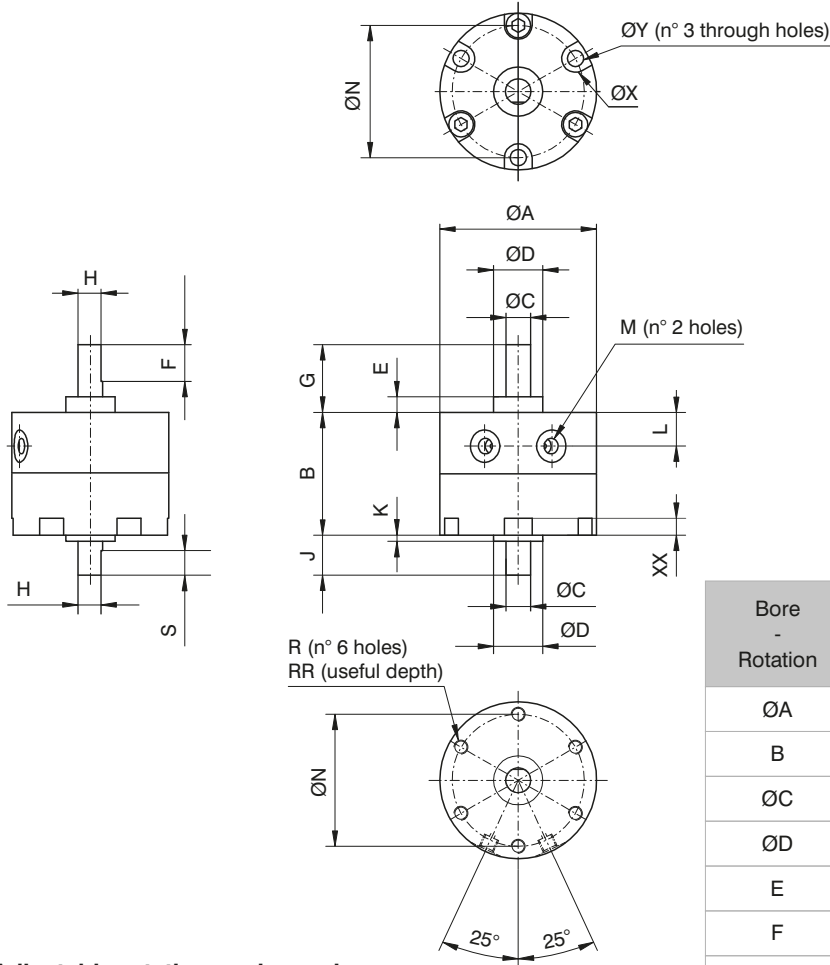


- Ø10 - Ø30 long shaft
- Ø10 - Ø40 short shaft

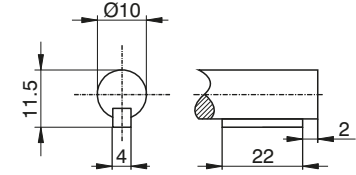


- Ø40 long shaft

Adjustable rotation angle version

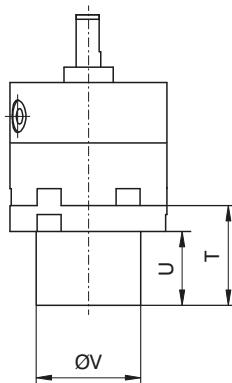



With sensor support version

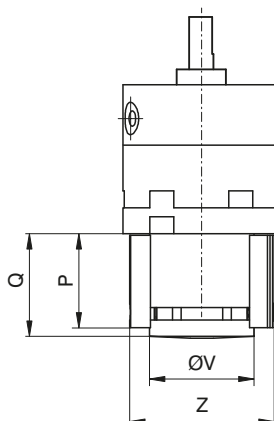


Bore - Rotation	10 - 90°	15 - 90°	20 - 90°	30 - 90°	40 - 90°	
	10 - 180°	15 - 180°	20 - 180°	30 - 180°	40 - 180°	
	10 - 270°	15 - 270°	20 - 270°	30 - 270°	40 - 270°	
ØA	30	35	44	51	64	
B	17	20,1	29,1	40	45	
ØC	4	5	6	8	10	
ØD	9	12	14	16	25	
E	3	4	4,5	5	6,5	
F	9	10	10	12	22	
G	14	18	20,3	22	30	
H	3,5	4,5	5,5	7,5	9	
J	8	9	9,6	13	15	
K	1	1,5	1,6	2	4,5	
L	4,2	5	8,5	11	9,5	
M	M5x0,8	M5x0,8	M5x0,8	M5x0,8	M5x0,8	
ØN	24	29	36	43	56	
P	23,3	28	28	30,8	33	
Q	24	29,5	30,5	34	36	
R	M3x0,5	M3x0,5	M4x0,7	M5x0,8	M5x0,8	
RR	3	3	4,5	9	9	
S	5	6	7	8	9	
T	24	28	28,5	32,5	34,5	
U	18	22	21	24	26	
ØV	18	24	30	34	34	
ØX	6	6	7,5	9	9	
XX	3,5	3,5	4,5	5,5	5,5	
ØY	2,3	2,3	3,2	4,2	4,2	
Z	29	34	42	47	47	
Weight (g)	Base	28	48	112	200	342
	With regulation rotation system	78	116	240	390	805

Overall dimensions Ø50 - Ø100


R (n° 6 threads on both sides)
RR (useful depth) ØVA (n° 4 holes)

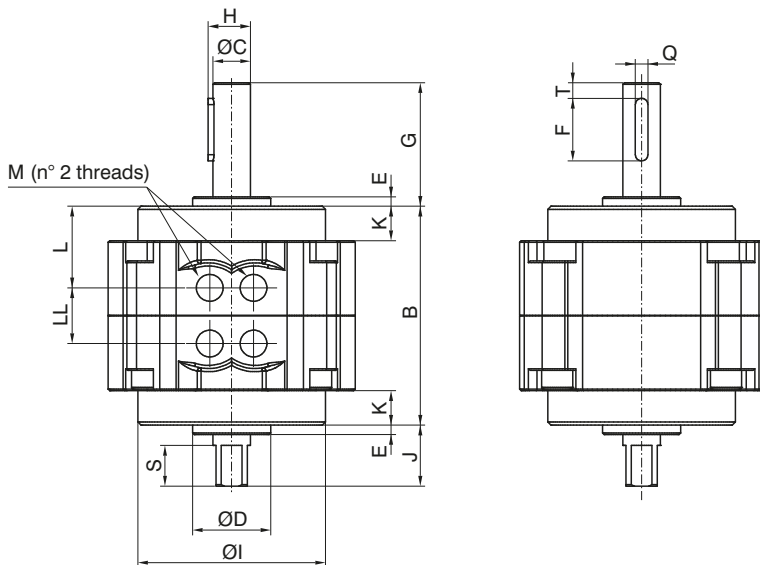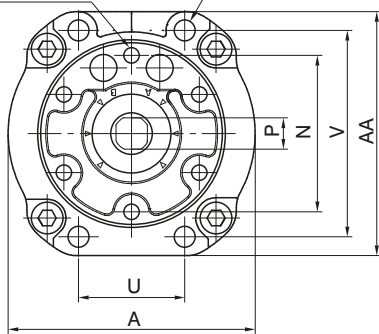

Adjustable rotation angle version

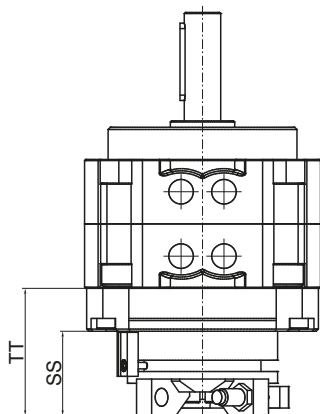

With sensor support version

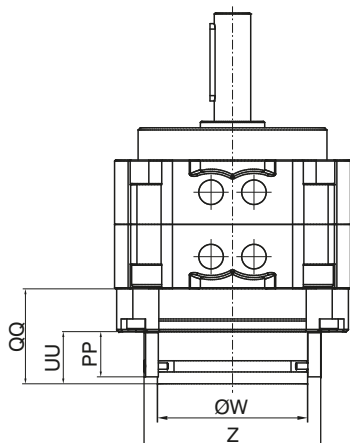


Bore - Rotation	50 - 90°	63 - 90°	80 - 90°	100 - 90°
	50 - 180°	63 - 180°	80 - 180°	100 - 180°
	50 - 270°	63 - 270°	80 - 270°	100 - 270°
A	79	98	110	140
AA	78	98	110	140
B	70	80	90	103
ØC	12	15	17	25
ØD	25	28	30	45
E	3	3	3	4
F	20	25	36	40
G	39,5	45	53,5	65
H	13,5	17	19	29
ØI	60	75	88	108
J	19,5	21	23,5	30
K	11	14	15	11,5
L	26	28,9	30	35,4
LL	18	22,2	30	32,2
M	G1/8"	G1/8"	G1/4"	G1/4"
N	50	60	70	80
P	10	12	13	19
PP	21	21	21	21
Q	4	5	5	7
QQ	39,4	43	44	48,5
R	M6x1	M8x1,25	M8x1,25	M10x1,5
RR	8	10	14	14
S	13	14	16	16
SS	38	38	39	39,5
T	5	7,5	5	5
TT	53	56,5	59	63
U	34	39	48	60
UU	24,5	24,5	24,5	24,5
V	66	83	94	120
ØVA	6,5	9	9	11
ØW	60	60	70	70
Z	73	73	83	83
Weight (g)	Base	760	1290	4100
	With regulation rotation system	1100	1690	2370

3 PNEUMATIC ACTUATION


Key flat position and adjustable rotation angle Ø10 - Ø40

ROTATING SHAFT KEY FLAT POSITION

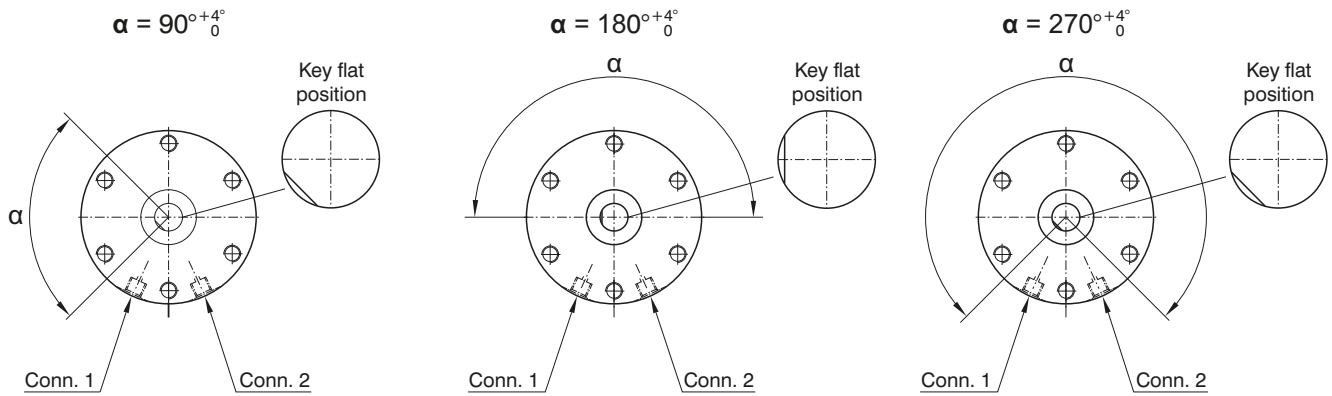

ROTATION ANGLE SETUP


To regulate the rotation angle (codes 6420..R or T), follow the instructions below

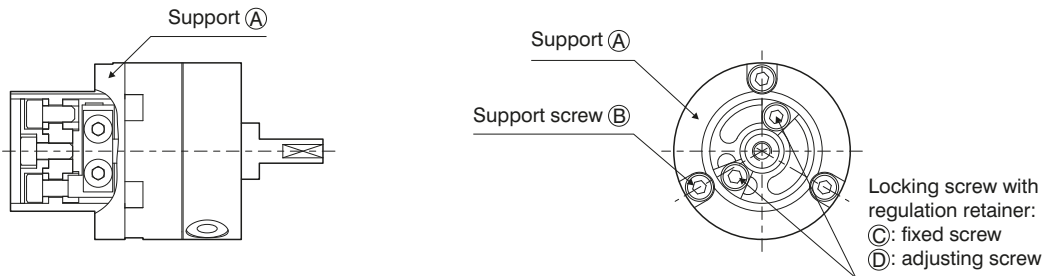


Phase 1 : Choose the regulation configuration based on the following options
(consider the actuator base position):

rotation 90°, regulation 0 - 90°, rotation 180°, regulation 0 - 180°, rotation 270°, regulation 0 - 175°

ROTATION CONFIGURATION

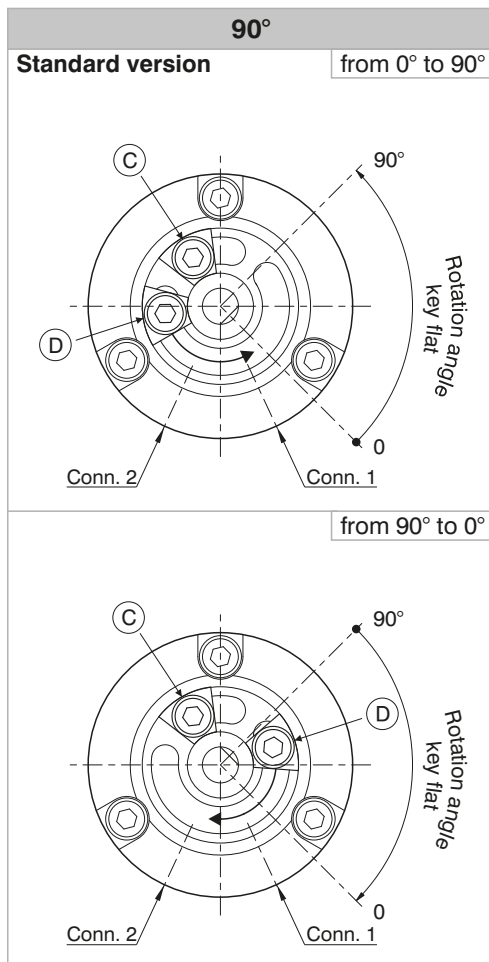


ROTATION CONFIGURATION

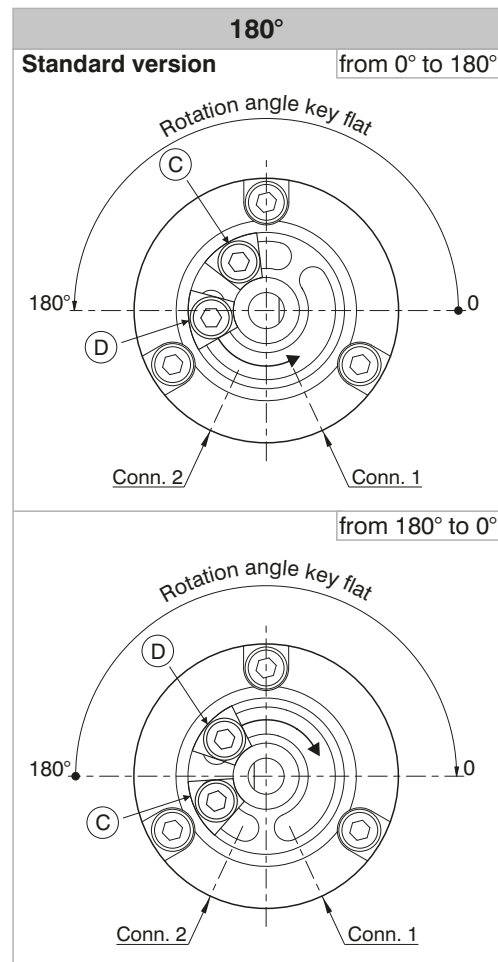



3 PNEUMATIC ACTUATION

Key flat position and adjustable rotation angle Ø10 - Ø40

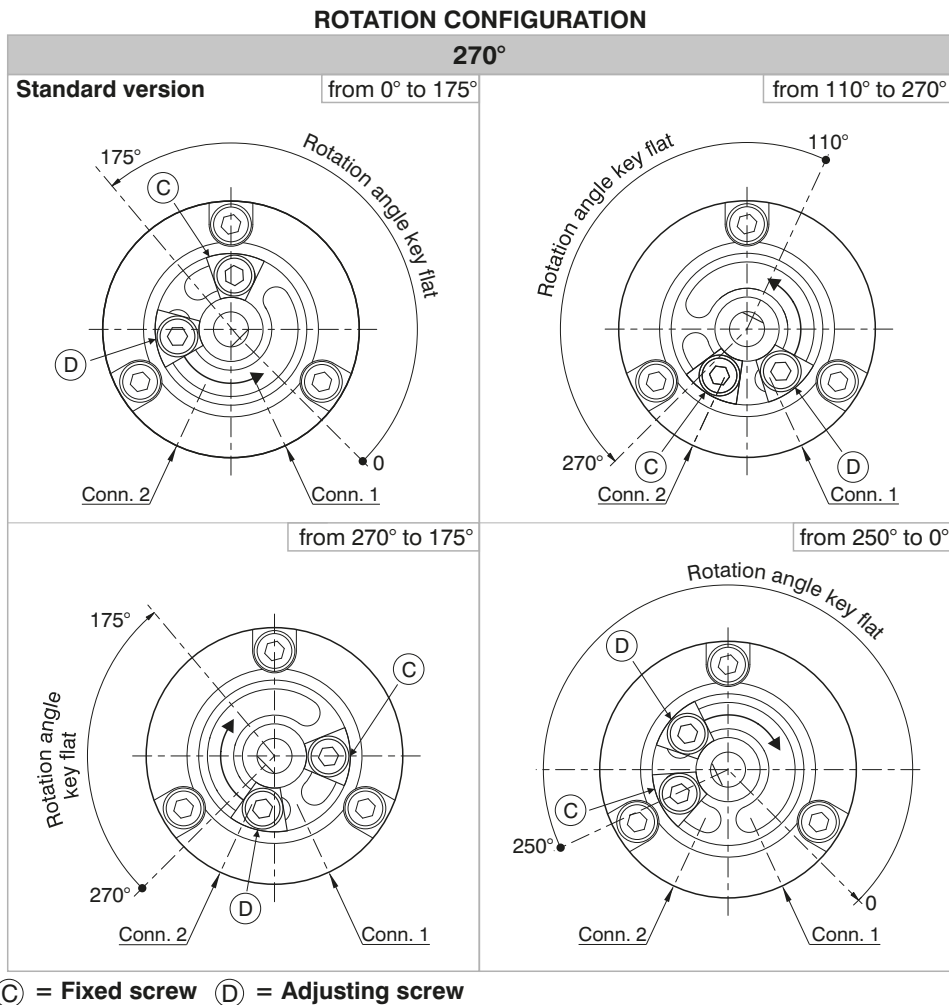


Phase 2 : If the desired settings do not correspond to the basic version settings:

- remove screw (E) and disk (F) or (G) (depending on the version) (see figure 1)
- remove screws (B), the actuator support (A) (see figure 1) and unlock blocking screws (C) and (D) (see rotation configuration)
- position screws (C) and (D) and the key flat of rotating shaft as indicated in the chosen rotation configuration in order to align the key flat of rotating shaft (see figure 2)
- re-assemble actuator support (A), tighten screws (B)
- position screws (C) and (D) according to the desired adjustment and tighten the screws
- re-assemble disk (F) or (G) and screw (E)

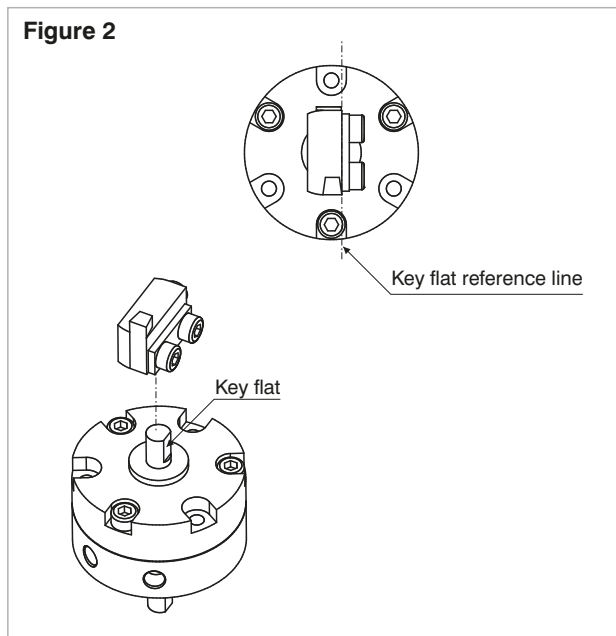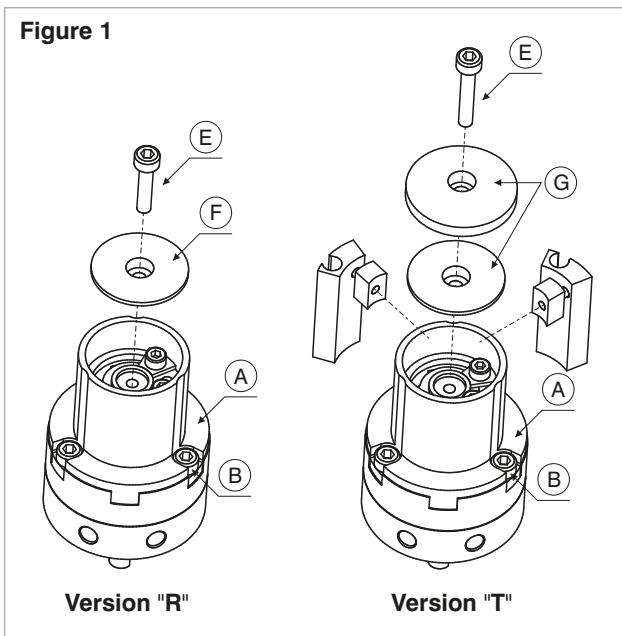

Spline position and adjustable rotation angle Ø50-Ø100

ROTATING SHAFT SPLINE POSITION

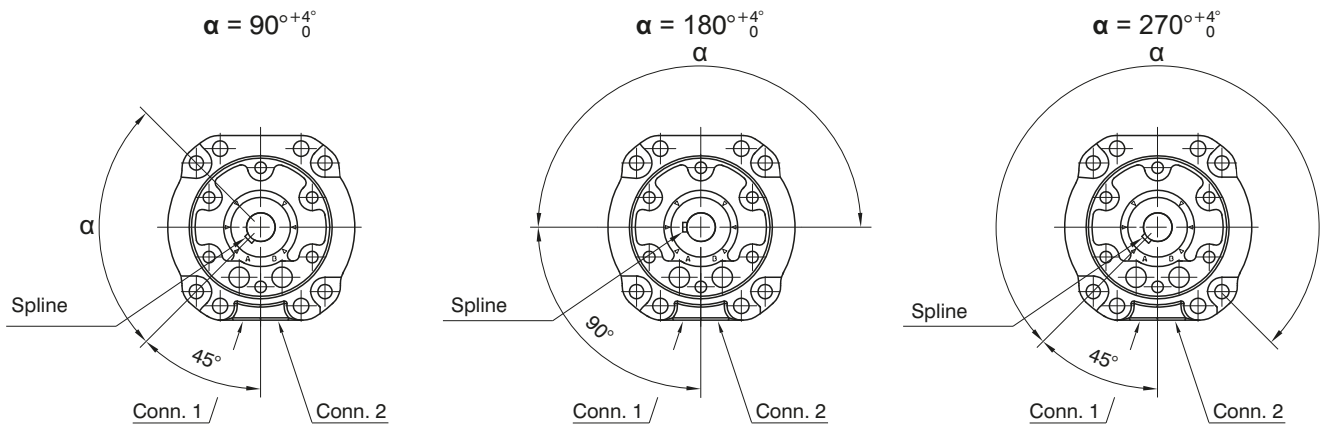


ROTATION ANGLE SETUP

The version with adjustable rotation angle (cod. 6420..R or T) is available with hydraulic dampers which enable to regulate the rotation angle by 15° and to decelerate moving mass.

Example: for 90° rotation and 15° regulation per decelerator, the effective rotation angle is 60°



Example: for 180° rotation and 15° regulation per decelerator, the effective rotation angle is 150°

Example: for 270° rotation and 15° regulation per decelerator, the effective rotation angle is 240°

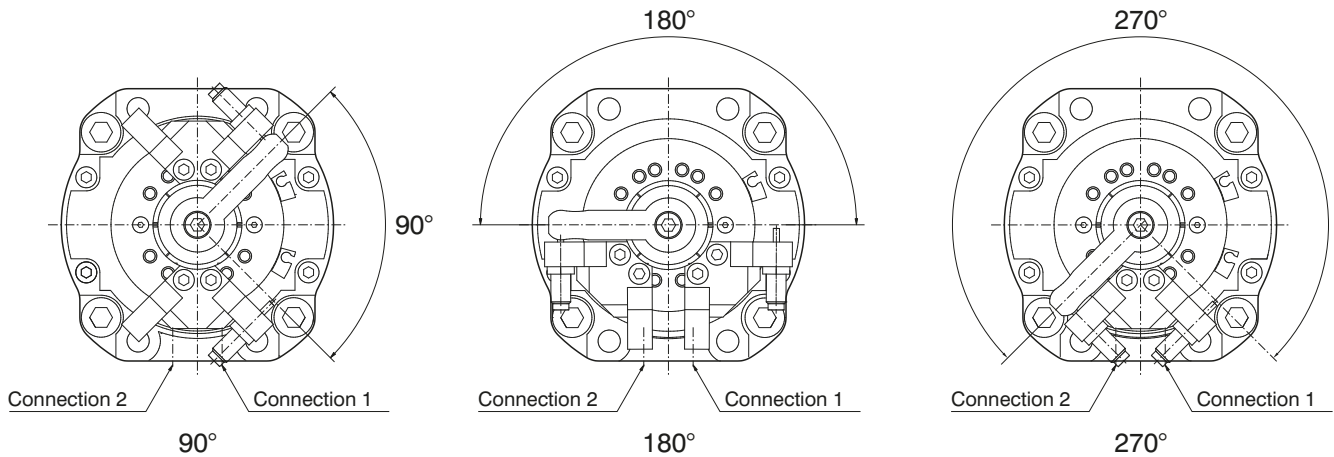

Switch positioning instructions Ø10 - Ø40

- Phase 1** - Unfasten screw (A)
- Phase 2** - Assemble the switch (C) into the dedicated housing (B) and lock with screw (D)
- Phase 3** - Rotate block (B) in the desired position (see following image)

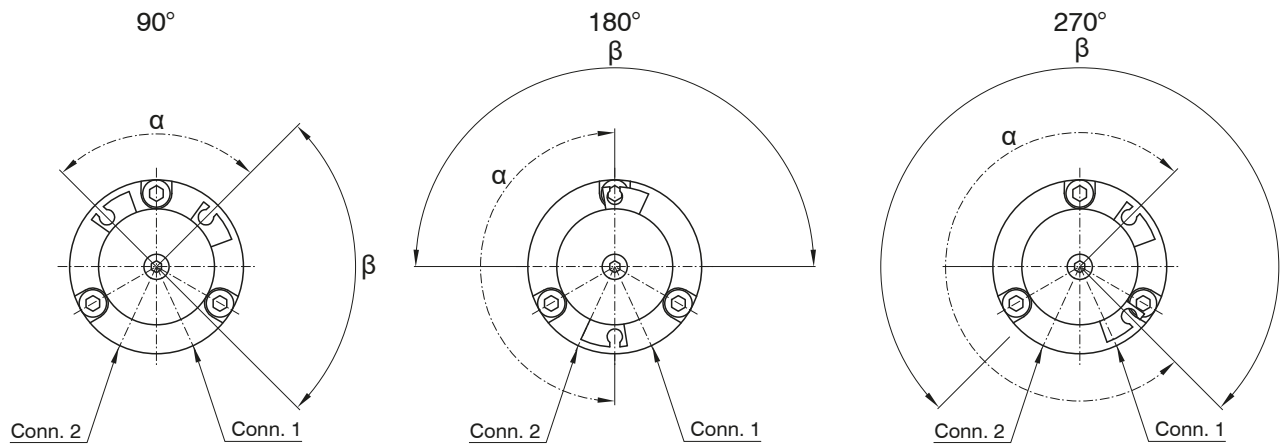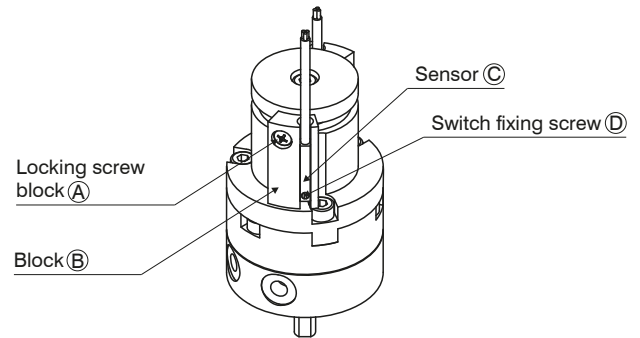

α - magnet rotating angle
β - shaft key flat rotating angle
 For correct functionality position the switch within angle **α**

- Phase 4** - tighten screw (A)
- Phase 5** - repeat the following phases for the second switch


AVAILABLE SENSORS

	Code
	1581.U
	TRS.U
	1581.HAP
	THS.P

	Code
	1583.DC
	1583.HAP
	THR.P

Switch positioning instructions Ø50 - Ø100




- Phase 1** - Unfasten screw (A)
- Phase 2** - Assemble the switch (C) into the dedicated housing (B) and lock with screw (D)
- Phase 3** - Rotate block (B) in the desired position (see following image)

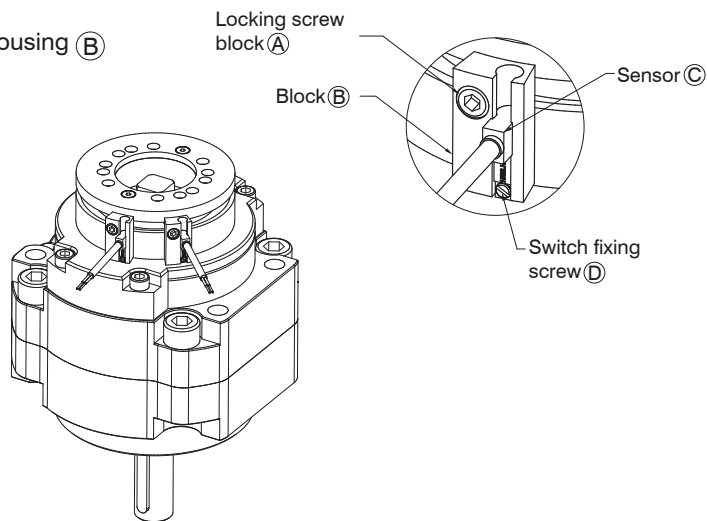

90°

180°
 α

270°
 α

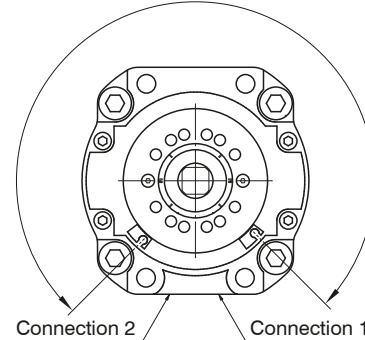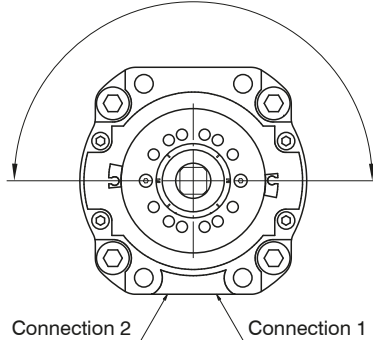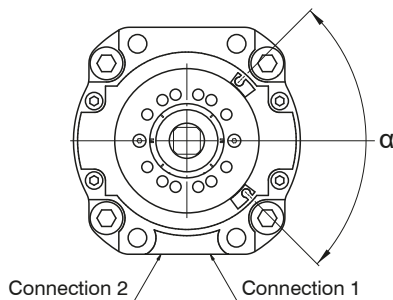

α - magnet rotating angle (that corresponds to the shaft key flat rotating angle)
For correct functionality position the switch within angle α


- Phase 4** - tighten screw (A)
- Phase 5** - repeat the following phases for the second switch

AVAILABLE SENSORS


	Code
	1583.DC
	1583.HAP
	THR.P

Available torques


Ø10

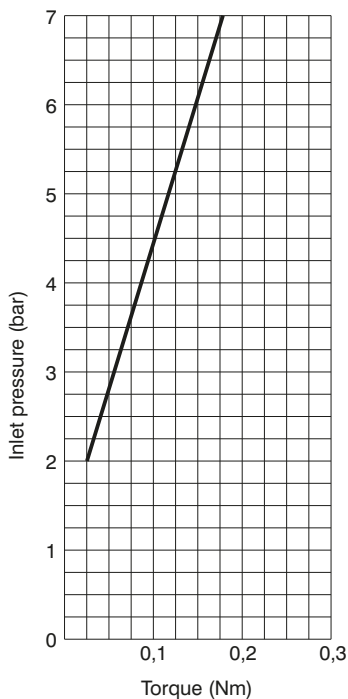


Ø15

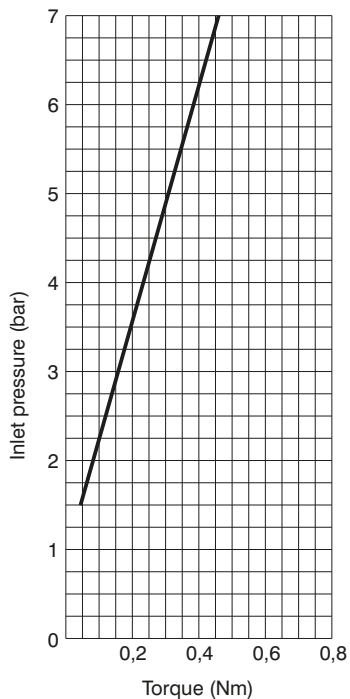


Ø20

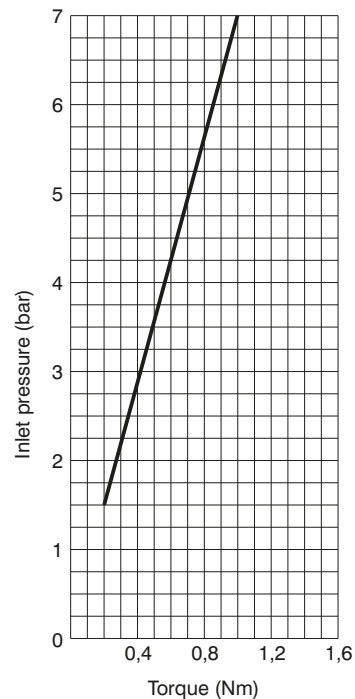


Ø30

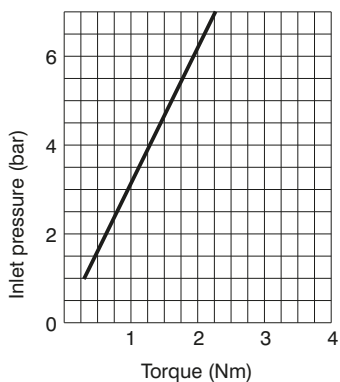


Ø40

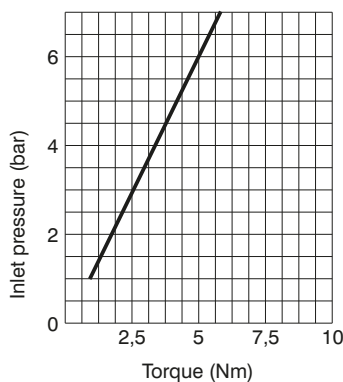


Ø50

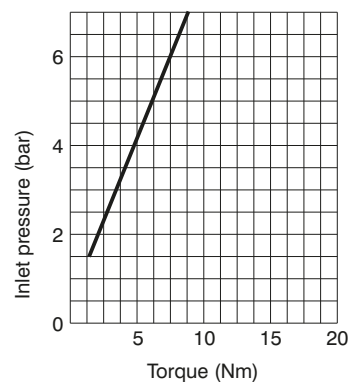


Ø63

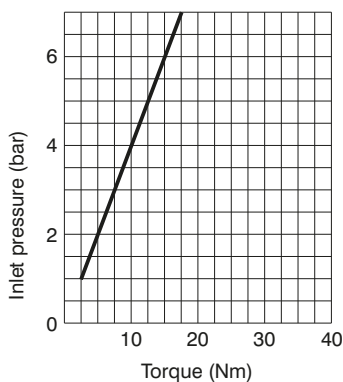


Ø80

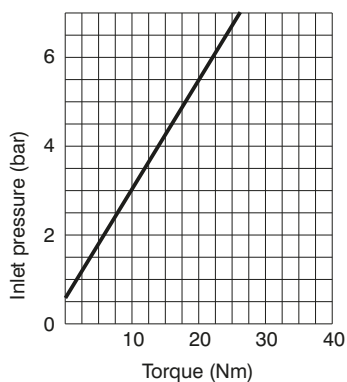


Ø100

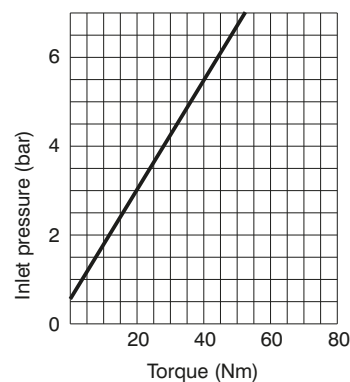


Direct mounting
Mounting types

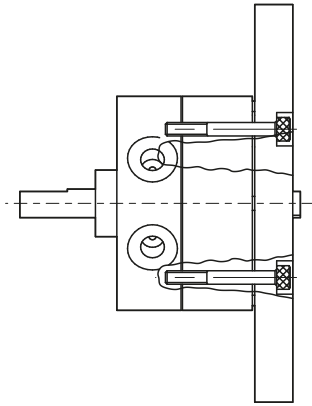


Rear mounting

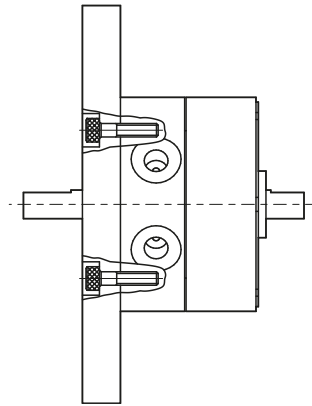


Frontal mounting

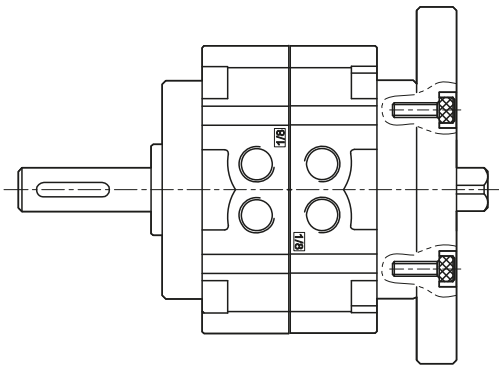

Rear mounting

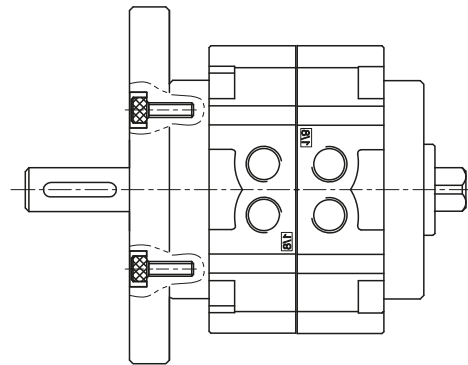

Frontal mounting

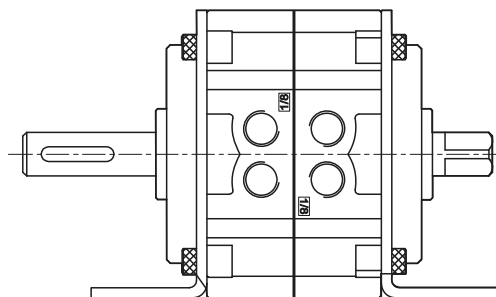

Mounting with flange

Slide cylinders



Ordering code

6600.Ø.stroke. _ _ _

8	= Without accessories
12	A = Double regulation end stroke
16	AU = Regulation front end stroke
20	AR = Regulation rear end stroke
25	D = Double shock absorber
	DU = Front shock absorber
	DR = Rear shock absorber

Construction characteristics

Body	anodised aluminium
Piston rod	stainless steel
Piston	stainless steel
Piston rod bushing	sintered bronze
End cap	anodised aluminium
Cushioning washer	PUR
Seal	oil resistant NBR rubber
Flange	anodised aluminium
Upper plate	anodised aluminium

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	1.5 - 7 bar
Working temperature	-5°C - +70°C
Cushioning	with elastic bumper

Theoretical force

Bore	Effective area (mm ²)	Force (N)						
		2	3	4	5	6	7	
Ø8	Out	101	20	30	40	51	61	71
	In	75	15	23	30	38	45	53
Ø12	Out	226	45	68	90	113	136	158
	In	170	34	51	68	85	102	119
Ø16	Out	402	80	121	161	201	241	281
	In	302	60	91	121	151	181	211
Ø20	Out	628	126	188	251	314	377	440
	In	471	94	141	188	236	283	330
Ø25	Out	982	196	295	393	491	589	687
	In	756	151	227	302	378	454	529

Standard strokes

Bore	Stroke								
	10	20	30	40	50	75	100	125	150
Ø8	●	●	●	●	●	●			
Ø12	●	●	●	●	●	●	●		
Ø16	●	●	●	●	●	●	●	●	
Ø20	●	●	●	●	●	●	●	●	●
Ø25	●	●	●	●	●	●	●	●	●

Overall dimensions Ø8

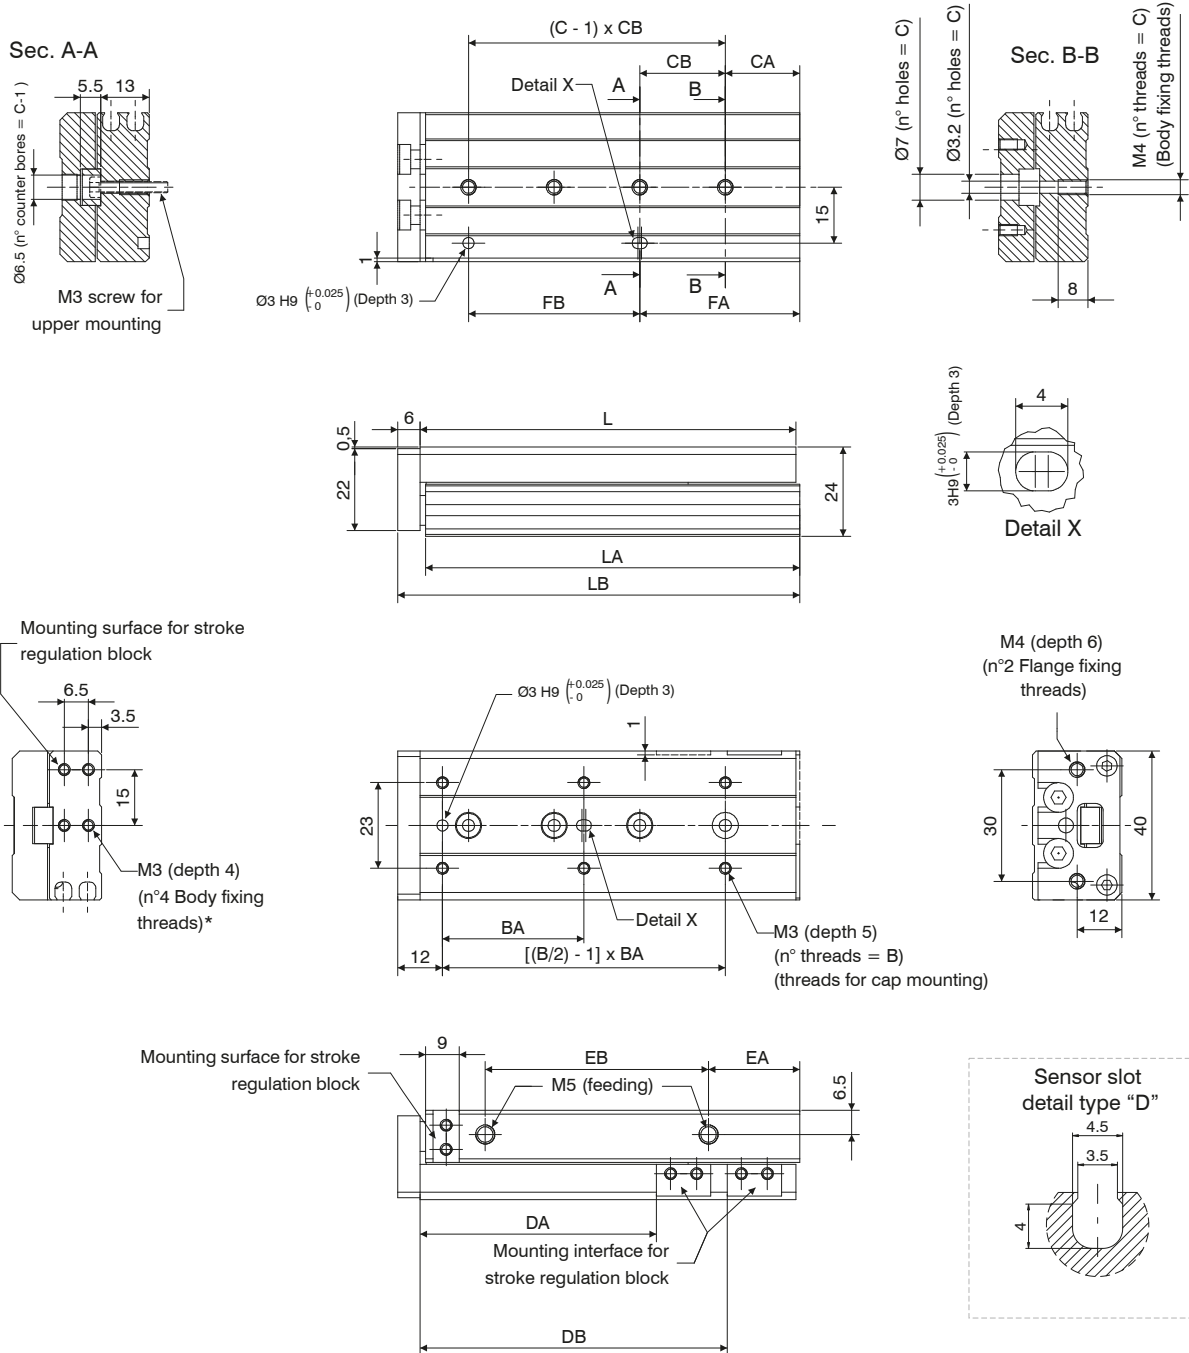


Table of dimensions

	Standard stroke					
	10	20	30	40	50	75
B	4	4	4	4	6	6
BA	25	25	40	50	38	50
C	2	2	3	3	4	5
CA	9	12	13	15	20	27
CB	28	30	20	28	23	28
DA	23,5	33,5	43,5	53,5	63,5	88,5
DB	/	/	/	/	82,5	132,5
FA	17	12	33	43	43	83
FB	20	30	20	28	46	56
EA	13	8,5	9,5	10,5	24,5	38,5
EB	19,5	29	39	56	60	96
L	49	54	65	83	101	151
LA	48,5	53,5	64,5	82,5	100,5	150,5
LB	56	61	72	90	108	158
Weight g	150	160	190	235	285	410

Overall dimensions Ø12

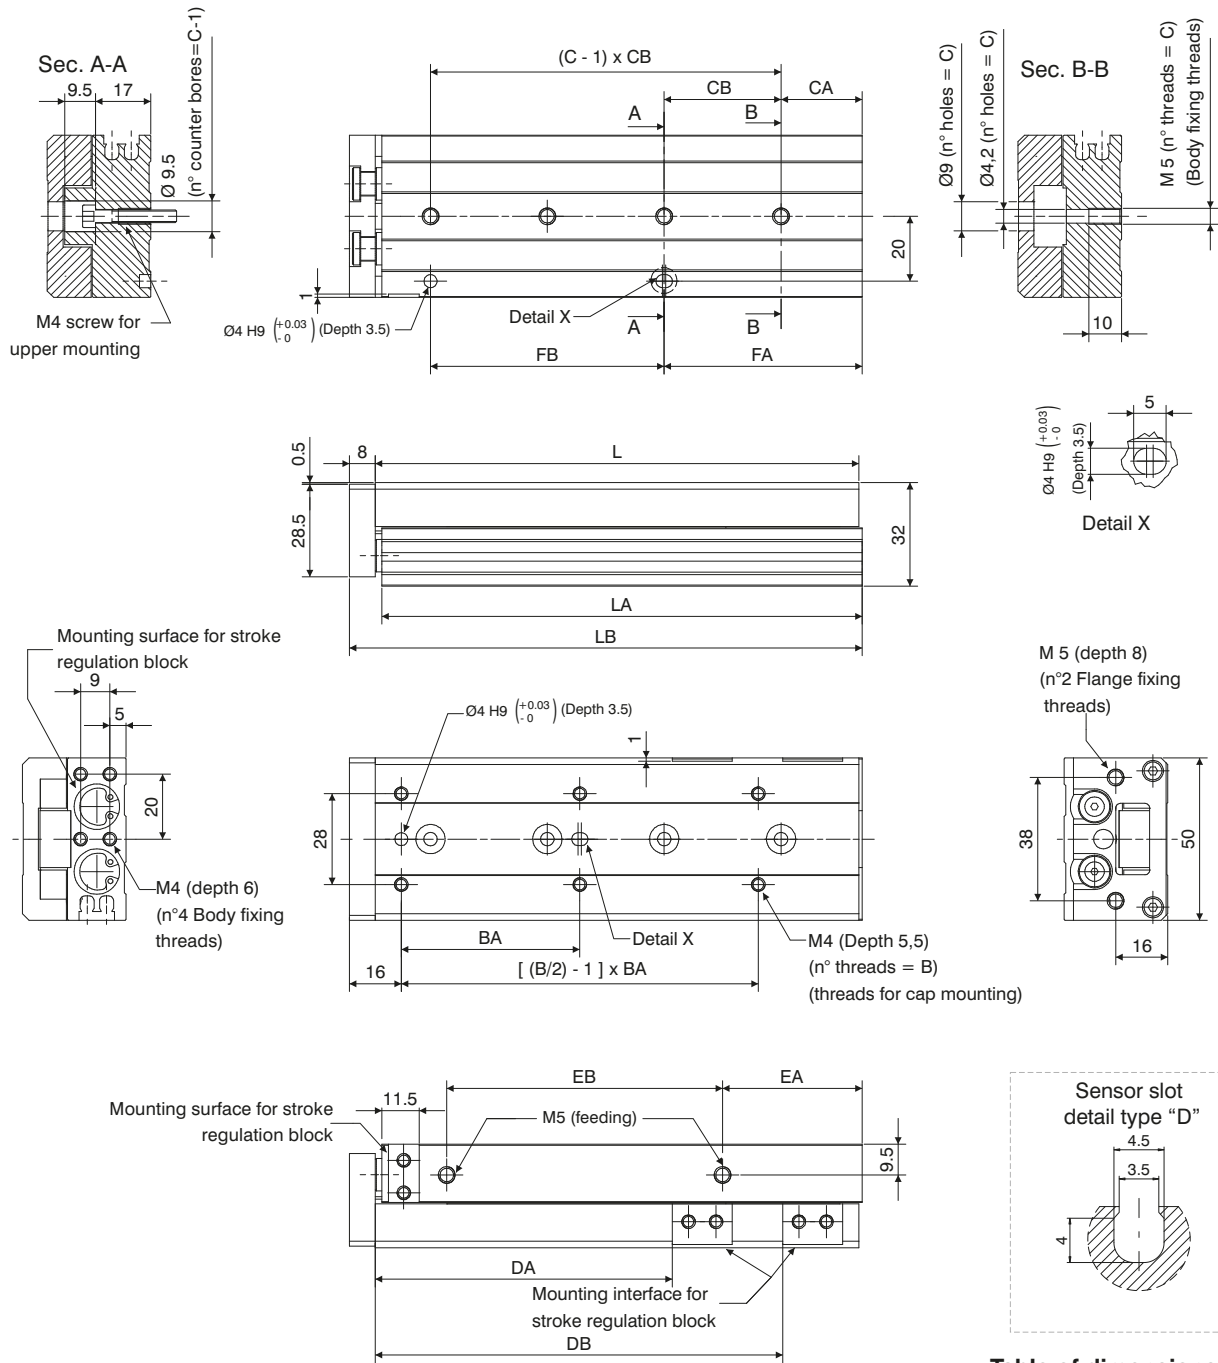


Table of dimensions

	Standard stroke						
	10	20	30	40	50	75	100
B	4				6		
BA		35		50	35	55	65
C		2		3	3	4	5
CA		15		17	15	25	35
CB		40		25	36	36	38
DA	26,5	36,5	46,5	56,5	66,5	91,5	116,5
DB	/	/	/	/	/	125,5	179,5
FA		15		42	51	61	111
FB		40		25	36	72	76
EA		10			22	43	52
EB		40		52	60	85	130
L		71		83	103	149	203
LA		70		82	102	148	202
LB		80		92	112	158	212
Weight (gr.)		325		385	480	660	890

Overall dimensions Ø16

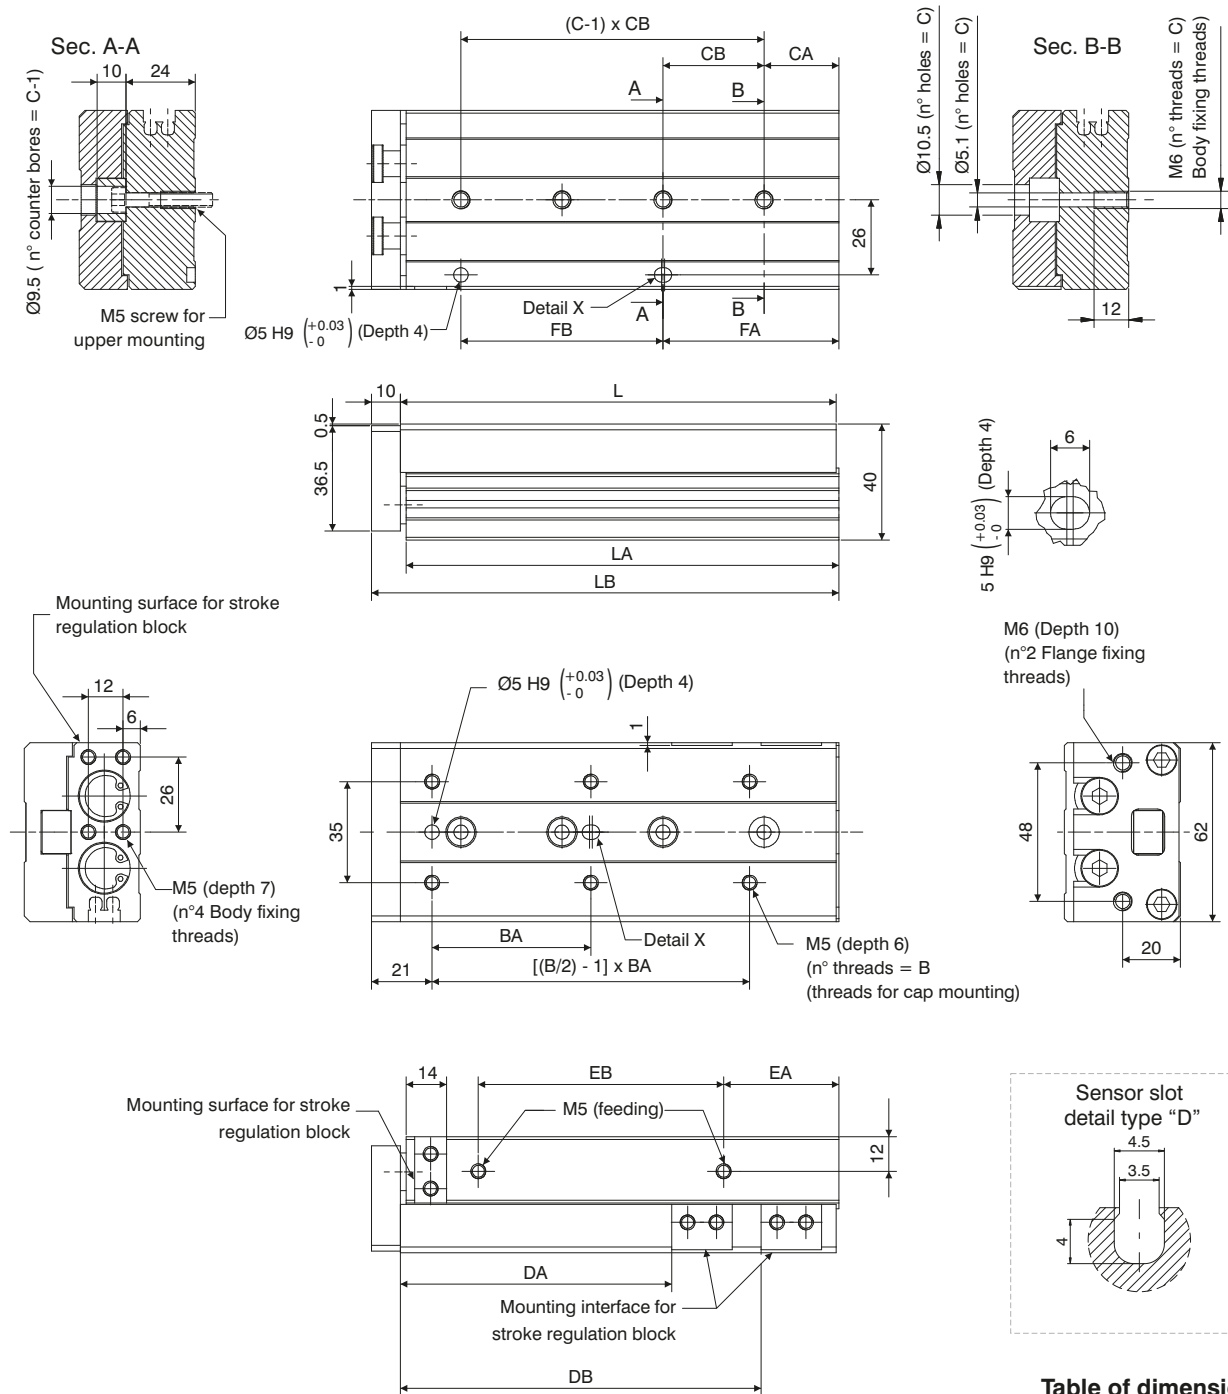


Table of dimensions

	Standard stroke							
	10	20	30	40	50	75	100	125
B	4	4	4	4	6	6	6	8
BA	35	35	35	40	30	55	65	70
C	2	2	2	2	3	4	5	7
CA	16	16	16	16	21	26	39	19
CB	40	40	40	50	30	35	35	35
DA	29	39	49	59	69	94	119	144
DB	/	/	/	/	/	125	173	223
FA	16	16	16	16	51	61	109	159
FB	40	40	40	50	30	70	70	70
EA	10	10	10	10	15	40	55	68
EB	40	40	40	50	60	85	118	155
L	76	76	76	86	101	151	199	249
LA	75	75	75	85	100	150	198	248
LB	87	87	87	97	112	162	210	260
Weight (gr.)	570	570	580	640	760	1090	1370	1700

Overall dimensions Ø20

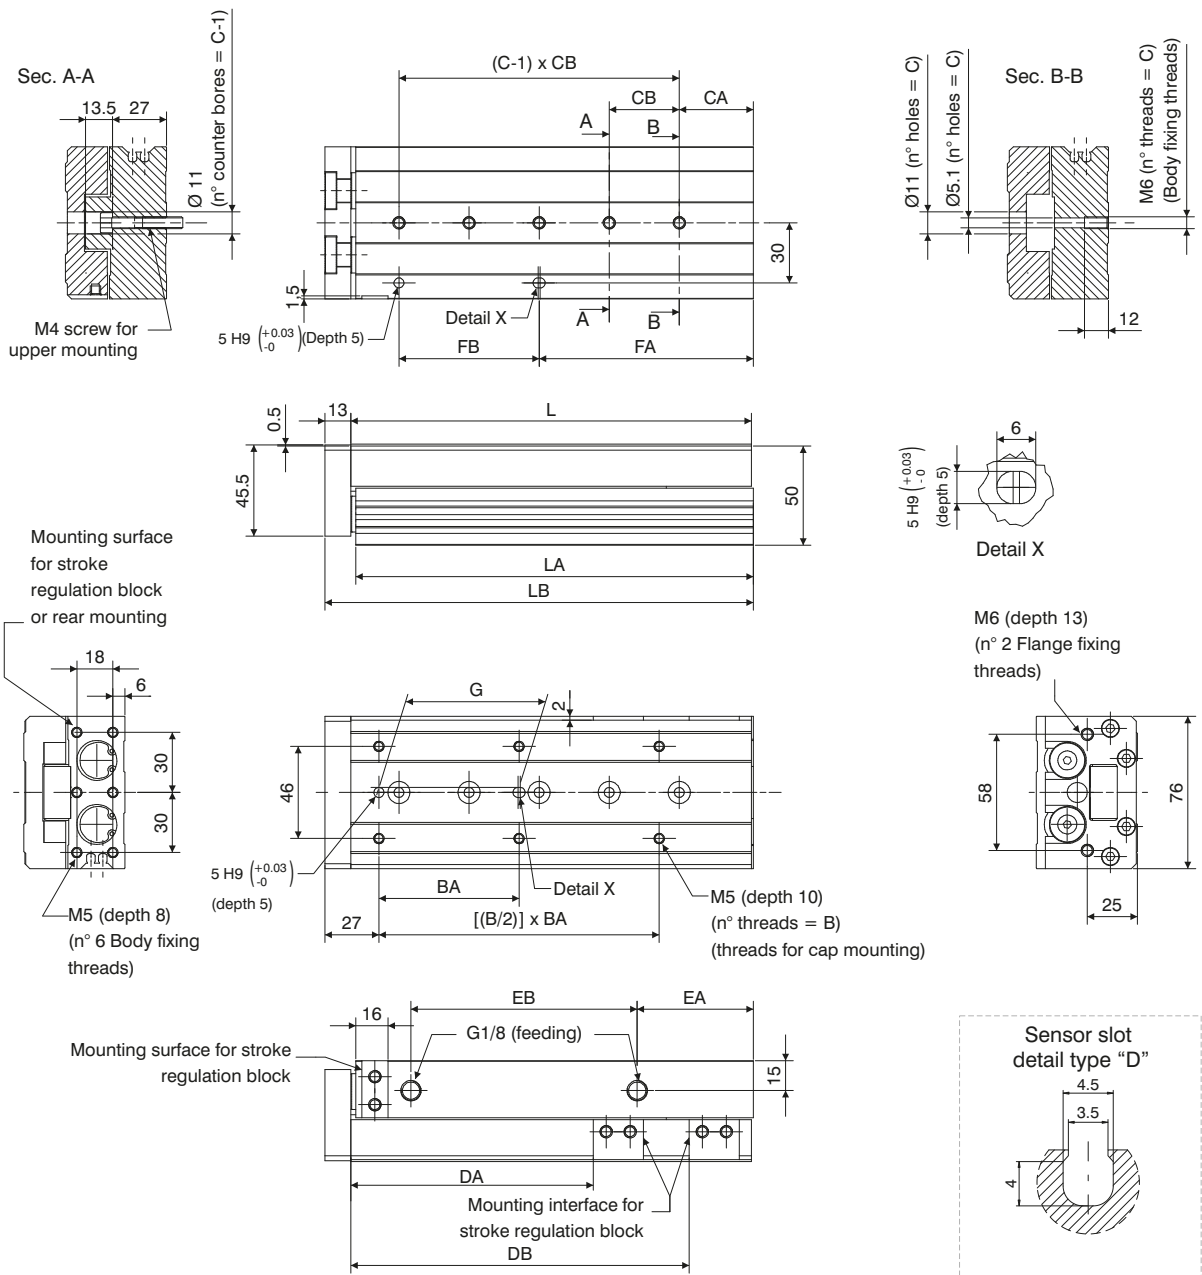


Table of dimensions

	Standard stroke								
	10	20	30	40	50	75	100	125	150
B	4	4	4	4	6	6	6	8	8
BA	50	50	50	60	35	60	70	70	80
C	2	2	2	2	3	4	5	6	7
CA	15	15	15	15	15	19	37	41	19
CB	45	45	45	55	35	35	35	38	44
DA	31	41	51	61	71	96	121	146	171
DB	/	/	/	/	/	/	169	223	275
EA	10	10	10	10	10	10	58	70	87
EB	44	44	44	54	69	108	113	155	190
FA	25	25	25	35	50	54	107	155	195
FB	35	35	35	35	35	70	70	76	88
G	40	40	40	50	35	60	70	70	80
L	83	83	83	93	108	147	200	254	306
LA	81,5	81,5	81,5	91,5	106,5	145,5	198,5	252,5	304,5
LB	97	97	97	107	122	161	214	268	320
Weight (gr.)	960	980	1010	1100	1250	1630	2150	2670	3190

Overall dimensions Ø25






Table of dimensions

	Standard stroke									
	10	20	30	40	50	75	100	125	150	
B	4	4	4	4	6	6	6	8	8	
BA	50	50	50	60	35	60	70	75	80	
C	2	2	2	2	3	4	5	6	7	
CA	22	22	22	22	20	26	32	40	30	
CB	45	45	45	55	35	35	35	38	40	
DA	35	45	55	65	75	100	125	150	175	
DB	/	/	/	/	/	/	162	218	258	
EA	12	12	12	12	12	33	50	67	82	
EB	47	47	47	57	70	90	114	155	180	
FA	22	22	22	22	55	61	102	154	190	
FB	45	45	45	55	35	70	70	76	80	
G	40	40	40	50	35	60	70	75	80	
L	92	92	92	102	115	156	197	255	295	
LA	90,5	90,5	90,5	100,5	113,5	154,5	195,5	253,5	293,5	
LB	108	108	108	118	131	172	213	271	311	
Weight g	1660	1680	1690	1840	2090	2650	3270	4140	4710	


Mounting options

SIDE THREADED HOLES

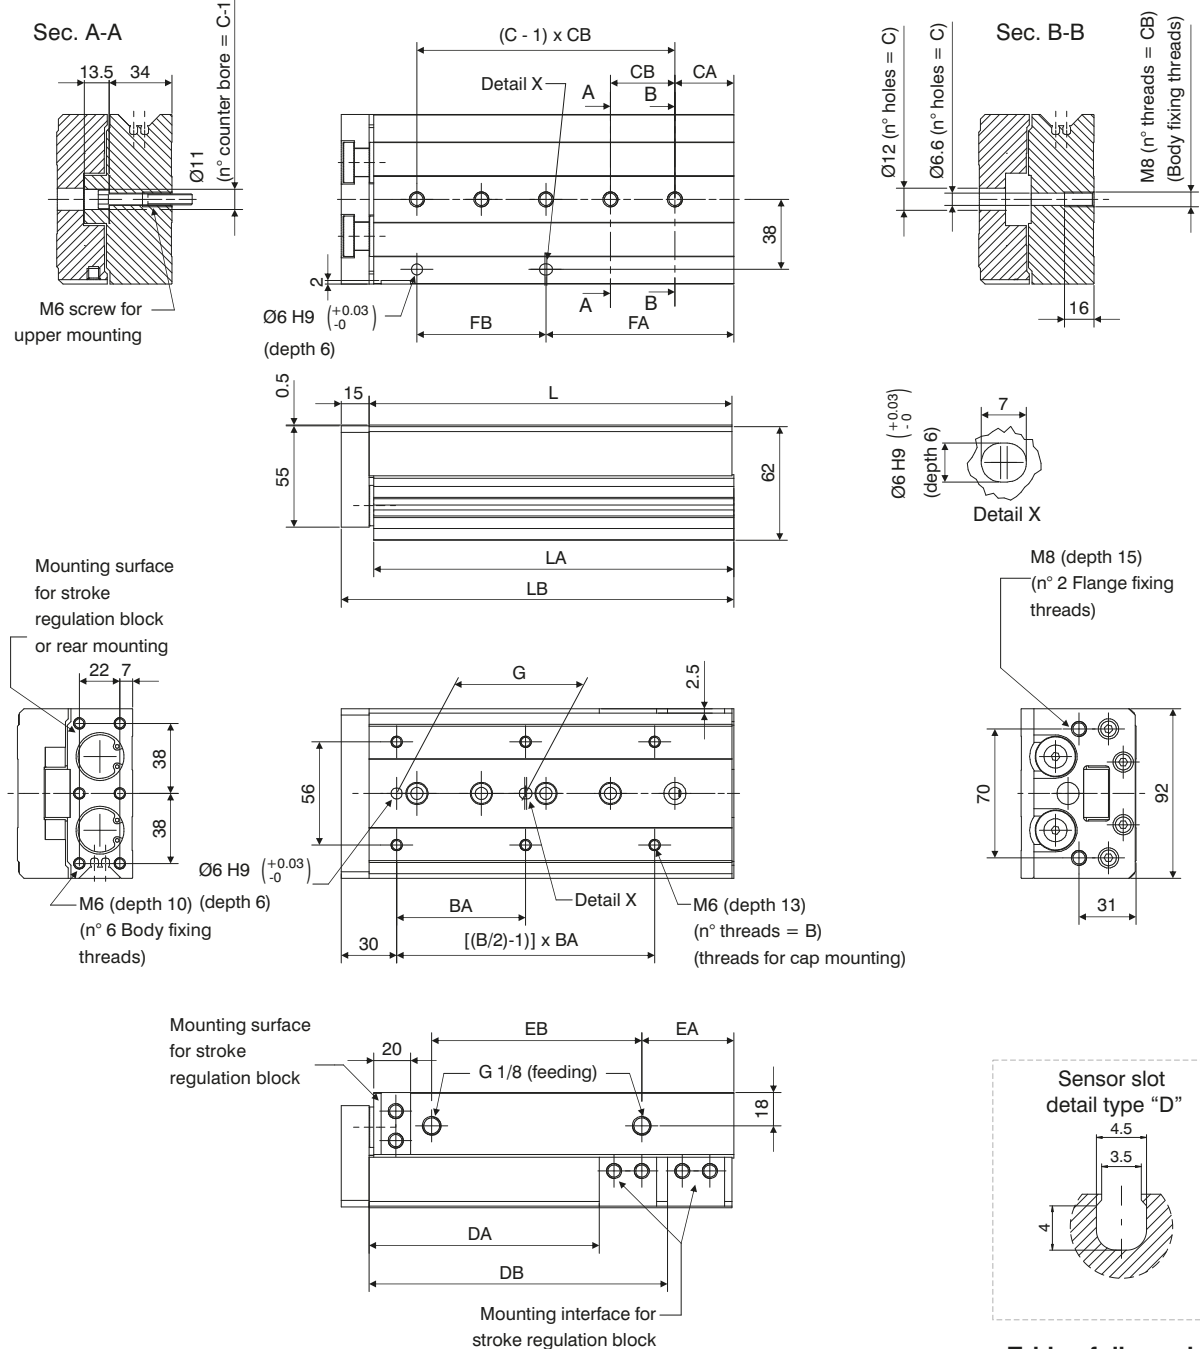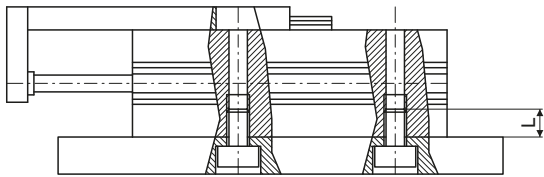


Bore	Screw	Torque (Nm)	Max. Length L (mm)
Ø8	M3	2,1	8
Ø12	M4	4,4	10
Ø16	M5	7,4	12
Ø20	M5	7,4	12
Ø25	M6	18	16

SIDE THROUGH HOLES

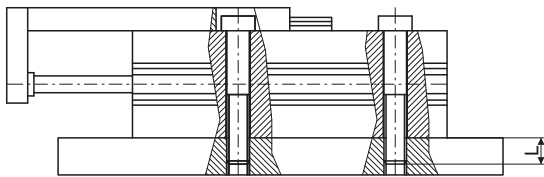


Bore	Screw	Torque (Nm)	Max. Length L (mm)
Ø8	M3	1,2	13
Ø12	M4	2,8	18,5
Ø16	M5	5,7	24
Ø20	M5	5,7	29
Ø25	M6	18	34

AXIAL THREADED HOLES

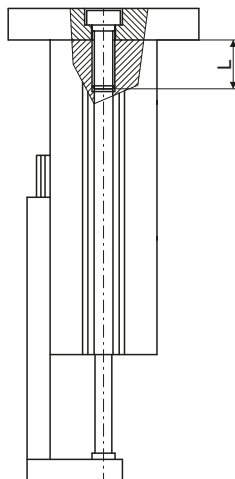


Bore	Screw	Torque (Nm)	Max. Length L (mm)
Ø8	M3	0,9	4
Ø12	M4	2,1	6
Ø16	M5	4,4	7
Ø20	M5	4,4	8
Ø25	M6	7,4	10

Mounting load

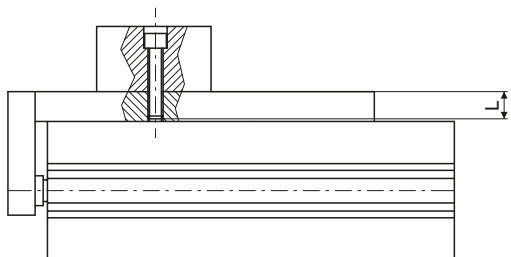

Bore	Screw	Torque (Nm)	Max. Length L (mm)
Ø8	M3	2,1	6
Ø12	M4	4,4	8
Ø16	M5	7,4	10
Ø20	M5	7,4	13
Ø25	M6	18	15






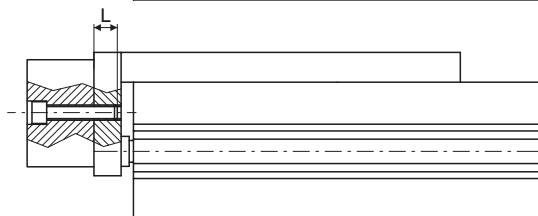


Bore	Screw	Torque (Nm)	Max. Length L (mm)
Ø8	M3	0,9	5
Ø12	M4	2,1	5,5
Ø16	M5	4,4	6
Ø20	M5	4,4	10
Ø25	M6	7,4	13







Kinetic energy (J)	Bore	With elastic bumper	With shock absorber
	Ø8	0,027	See Dampers 6900
	Ø12	0,055	
	Ø16	0,11	
	Ø20	0,16	
	Ø25	0,24	

Plate deflection







With front moment under static conditions completely extended and with load applied as indicated by the arrows.

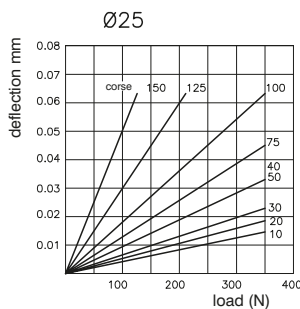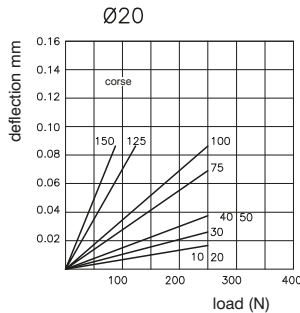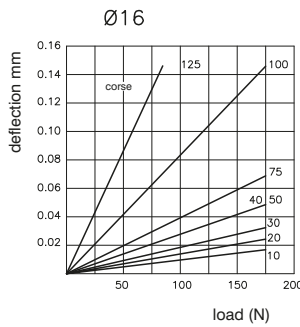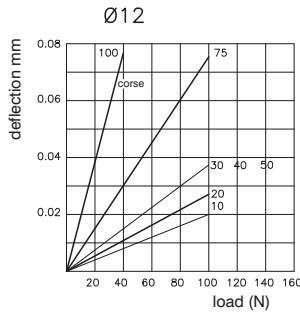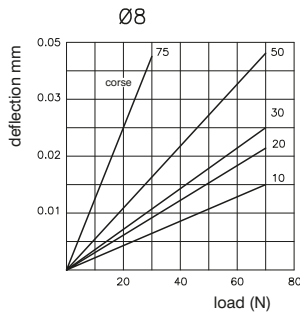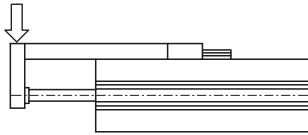


With side moment under static conditions completely extended and with load applied as indicated by the arrow

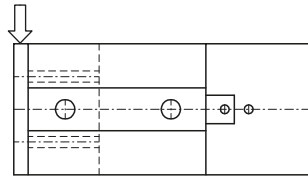

With misaligned side moment with load applied as indicated by the arrow at a distance "L" and with plate completely retracted.

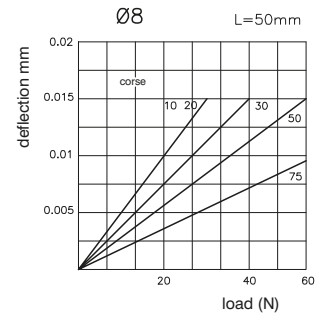


Accessories - Static moment
Dimensions with dampers

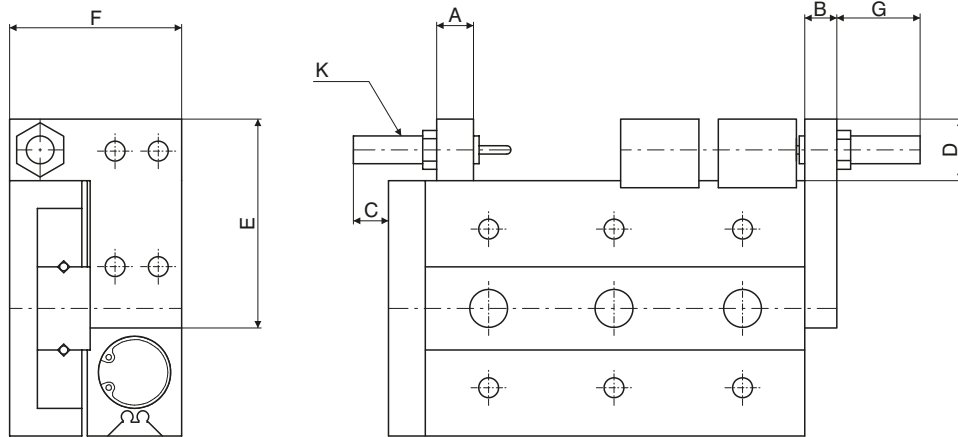

3

PNEUMATIC ACTUATION


Dimensions with adjusting screw

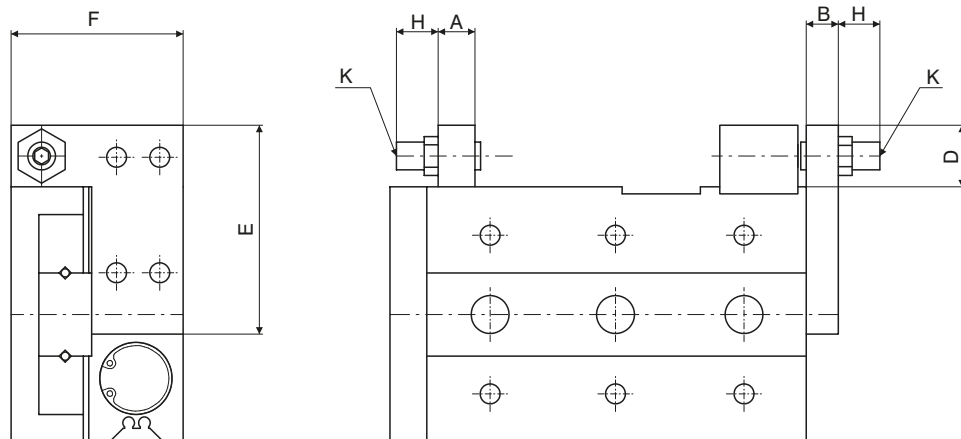

Bore	A	B	C	D	E	F	G max.	H max.	K
Ø8	7	8	26	14,5	38,5	23	25,5	28,5	M8x1
Ø12	9,5	8	21	15	45	31,5	24,5	32	M8x1
Ø16	11	10	19	18	55	37,5	29	34,5	M10x1
Ø20	13	12	28	24,5	70	47,5	42,5	35,5	M14x1,5
Ø25	16	15	34	24,5	80	54,5	39,5	37,5	M14x1,5

► Shock absorber mounting block / front stroke adjusting screw



Ordering code
6600.Ø.SU

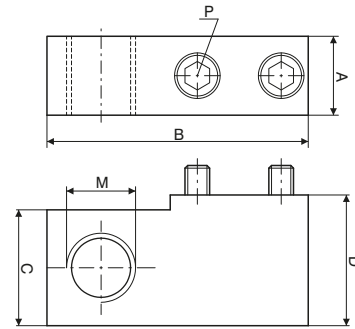

Bore	A	B	C	D	M	P
Ø8	7	23	14	15,5	M8x1	M3x16
Ø12	9,5	31	14,5	16		M4x16
Ø16	11	37	17,5	19	M10x1	M5x18
Ø20	13	45,5	23,5	26	M14x1,5	M6x25
Ø25	16	53,5		26,5		M8x25

► Reference block


Ordering code
6600.Ø.SI

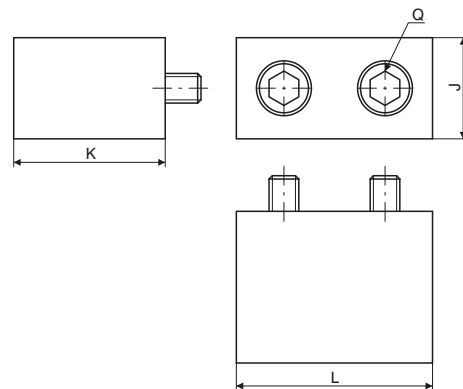

Bore	J	K	L	Q
Ø8	7	15,5	14,6	M3x16
Ø12	10	15	18,5	M4x14
Ø16	12	18,5	21	M5x18
Ø20	13	25,5	25	M6x25
Ø25	17		31	M8x25

► Shock absorber mounting block / rear stroke adjusting screw


Ordering code
6600.Ø.SR

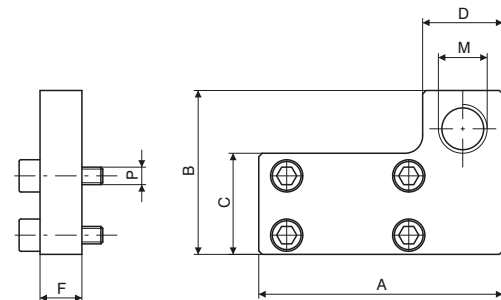

Bore	A	B	C	D	F	M	P
Ø8	38	23	12,5	14	8	M8x1	M3x12
Ø12	45	31	18				M4x12
Ø16	55	37	23,5	16	10	M10x1	M5x14
Ø20	70	47	29	23	12	M14x1,5	M5x16
Ø25	80	54	35		15		M6x20

► Adjusting screw

Ordering code
6600.Ø.VR

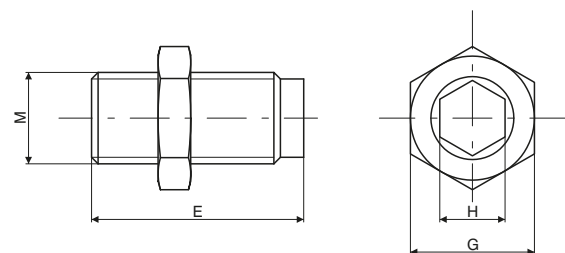

Bore	E	G	H	M
Ø8	36,5	12	4	M8x1
Ø12	40		5	
Ø16	44,5	14	5	M10x1
Ø20	47,5	22	8	M14x1,5
Ø25	52,5			

► Guide cylinders



Ordering code

6700.Ø.stroke

- 10
- 16
- 20

Construction characteristics

Body	anodised aluminium
Piston rod	stainless steel
Piston	aluminium
Piston rod bushing	aluminium
End cap	anodised aluminium
Seals	oil resistant NBR rubber
Table	anodised aluminium

Standard strokes

Bore	Stroke								
	5	10	15	20	25	30	40	50	60
Ø10	●	●	●	●	●	●	●	●	●
Ø16	●	●	●	●	●	●	●	●	●
Ø20	●	●	●	●	●	●	●	●	●

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Working pressure	1.2 - 7 bar
Working temperature	-5°C - +70°C
Cushioning	with elastic bumper

Theoretical force

Bore	Effective area (mm ²)	Force (N)						
		2	3	4	5	6	7	
Ø10	Out	28,3	5,7	8,5	11,3	14,2	17	19,8
	In	21,2	4,2	6,4	8,5	10,6	12,7	14,8
Ø16	Out	78,5	15,7	23,6	31,4	39,3	47,1	55
	In	66	13,2	19,8	26,4	33	39,6	46,2
Ø20	Out	314	62,8	94,2	125,6	157	188,4	219,8
	In	264	52,8	79,2	105,6	132	158,4	184,8

Overall dimensions - Ø10

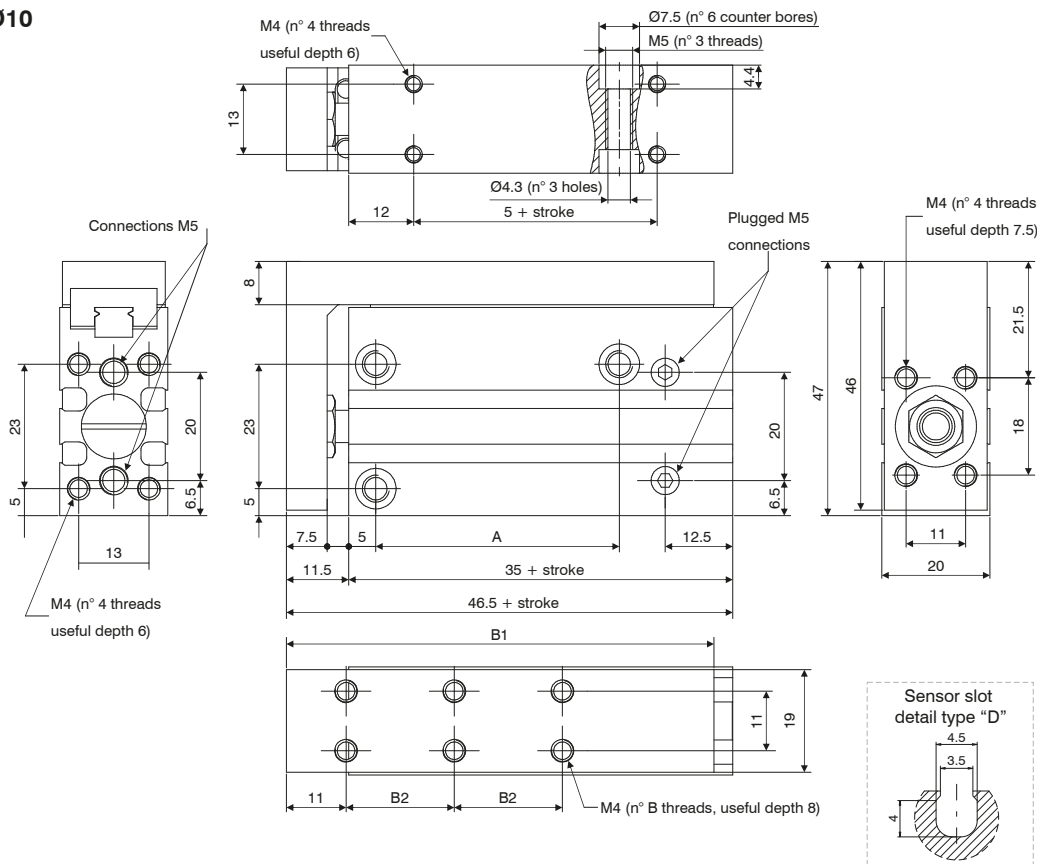


Table of dimensions

	Standard strokes								
	5	10	15	20	25	30	40	50	60
A	14	24	30	45	45	60			
B1	49	59	69	79	79	99			
B2	10	20	30	20	20	30			
B	4			6					
Weight (g)	117	125	140	148	162	170	192	215	238

Overall dimensions - Ø16

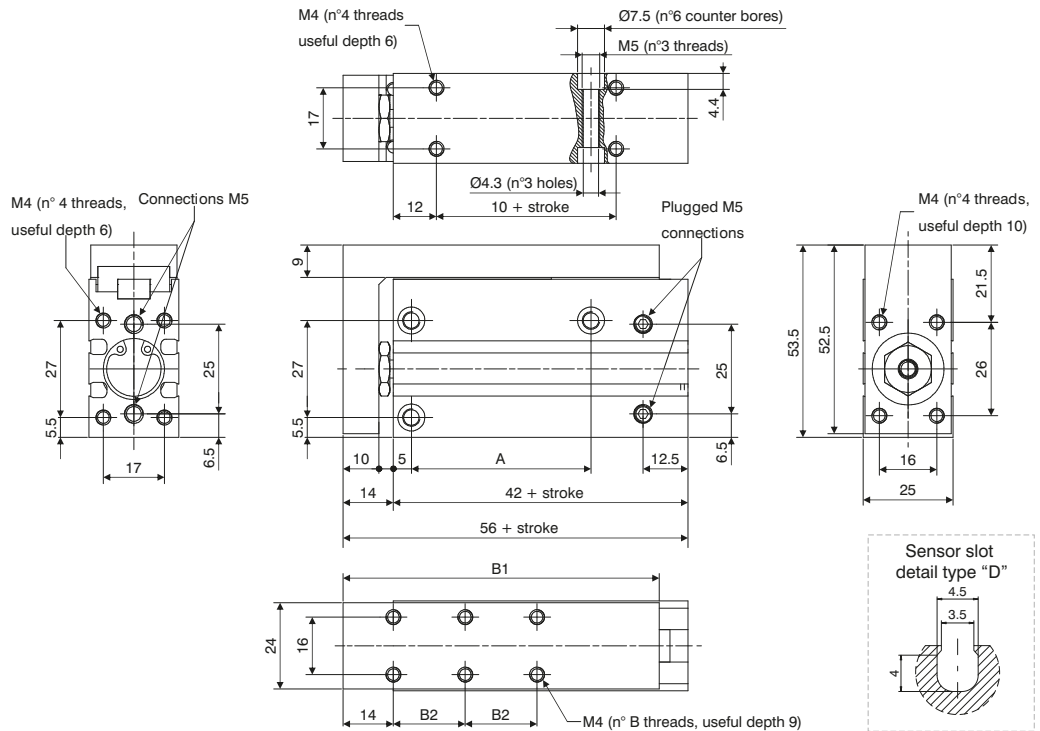


Table of dimensions

	Standard strokes								
	5	10	15	20	25	30	40	50	60
A	20	30	40	50	60				
B1	58	68	78	88	98	108			
B2	10	20	30	20	25	30			
B	4				6				
Weight (g)	215	230	250	260	280	290	325	350	390

Overall dimensions - Ø20


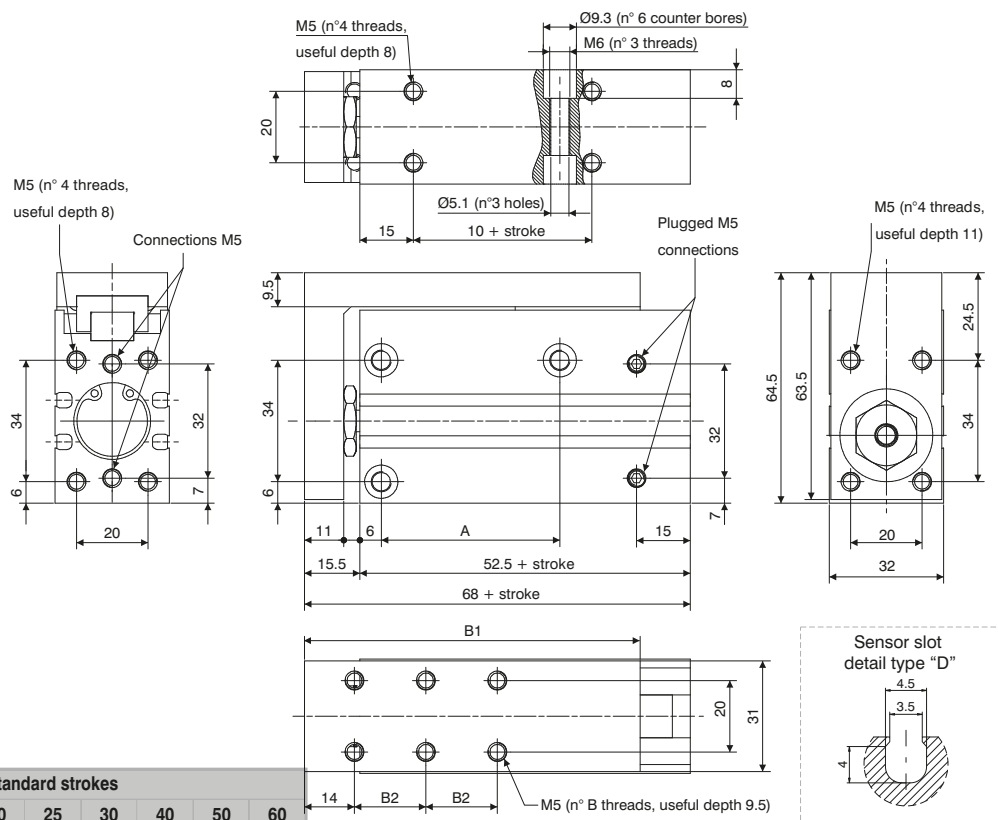


Table of dimensions

	Standard strokes								
	5	10	15	20	25	30	40	50	60
A	20	25	40	50	70				
B1	64	74	84	94	104	114			
B2	10	20	30	20	25	30			
B	4				6				
Weight (g)	440	455	490	505	540	560	600	660	700


Fixing - Load

LATERAL (THROUGH SCREW)

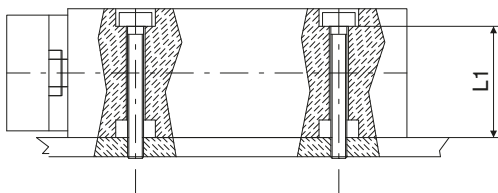


	SCREW	Maximum torque (Nm)	L1
Ø10	M4	2.5	15.6
Ø16	M4	2.5	20.6
Ø20	M5	5.1	24

LATERAL (THREADED HOLE)

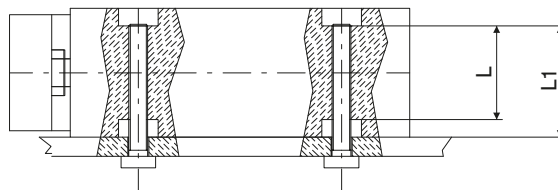


	SCREW	Maximum torque (Nm)	L1	L
Ø10	M5	5.1	15.6	11.2
Ø16	M5	5.1	20.6	16.2
Ø20	M6	8.1	24	16

VERTICAL (THREADED HOLE)

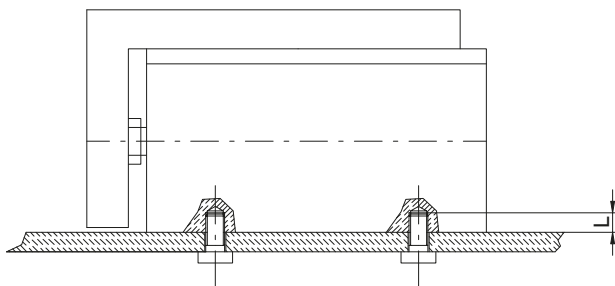

	SCREW	Maximum torque (Nm)	L
Ø10	M4	2.5	6
Ø16	M4	2.5	6
Ø20	M5	5.1	8


AXIAL (THREADED HOLE)

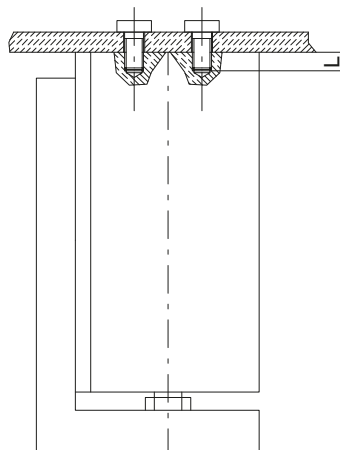

	SCREW	Maximum torque (Nm)	L
Ø10	M4	2.5	6
Ø16	M4	2.5	6
Ø20	M5	5.1	8


LOAD

FRONTAL MOUNTING

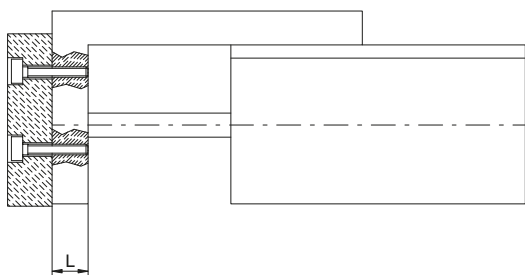


	SCREW	Maximum torque (Nm)	L
Ø10	M4	2.5	7.5
Ø16	M4	2.5	10
Ø20	M5	5.1	11

BACK MOUNTING

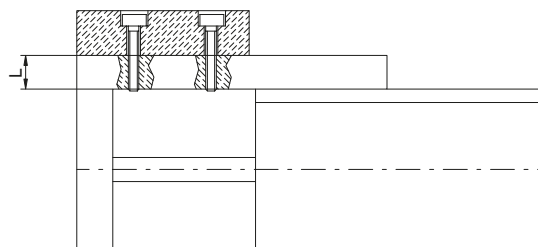


	SCREW	Maximum torque (Nm)	L
Ø10	M4	2.5	8
Ø16	M4	2.5	9
Ø20	M5	5.1	9.5

Fixing - Load

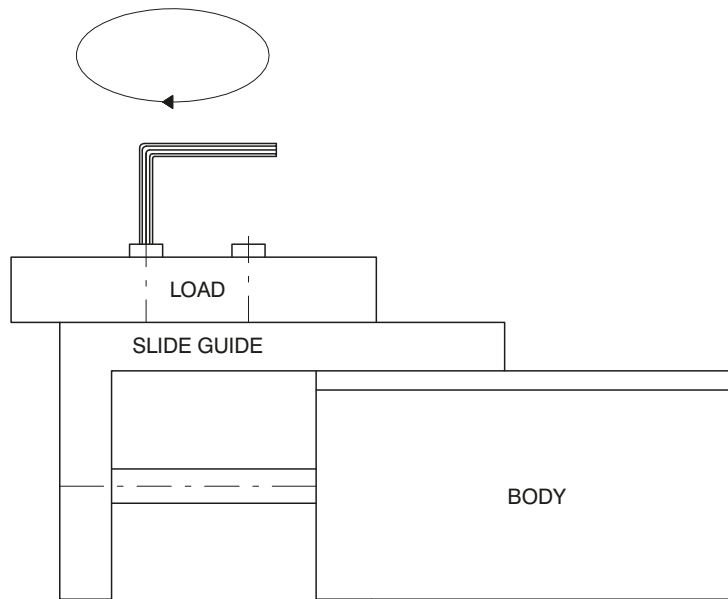

ATTENTION : Slide must be blocked before fixing the load
this operation should not be done by blocking the body as the
guide could get damaged.

CONNECTION BETWEEN PLATE AND ROD

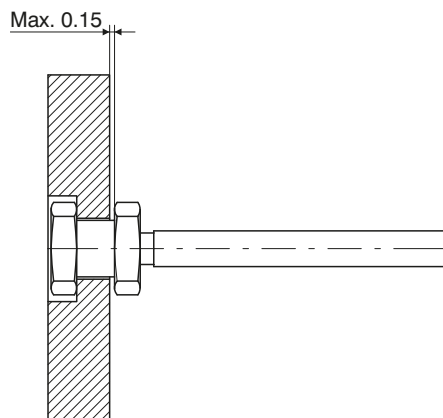

The fluctuating connection, maximum clearance 0.15mm as indicated by the arrow



Plate deflection graphs

Plate deviation (arrow) when the load is applied on the spot indicated with the arrow and the unit completely extended



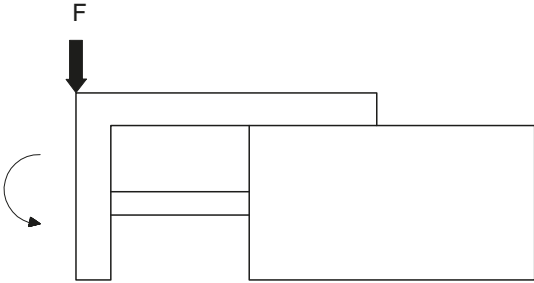



Plate deviation (arrow) when the load is applied on the spot indicated with the arrow and the unit completely extended

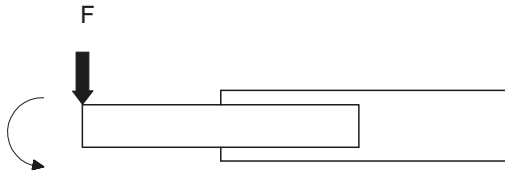


Ø10

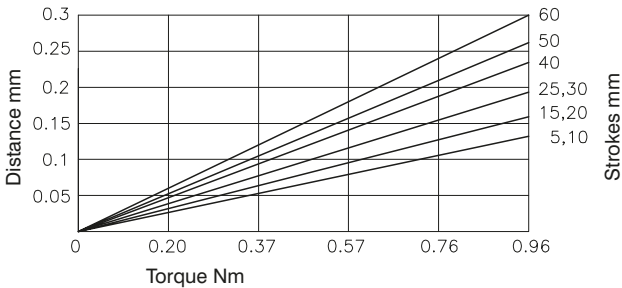


Ø10

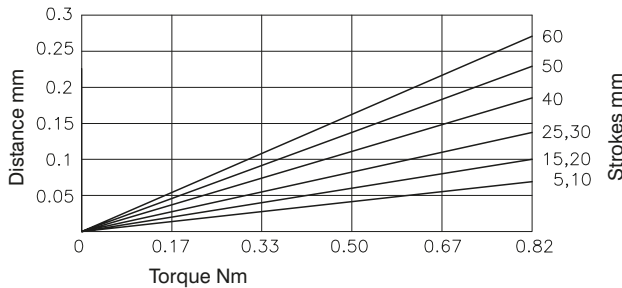


Ø16

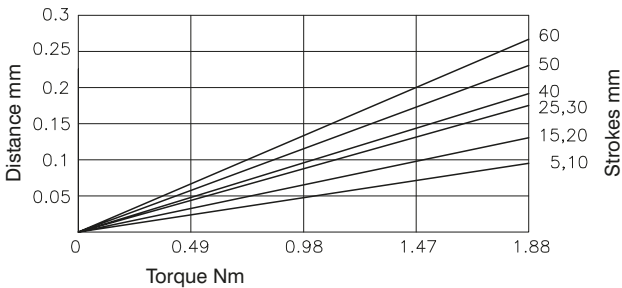


Ø16

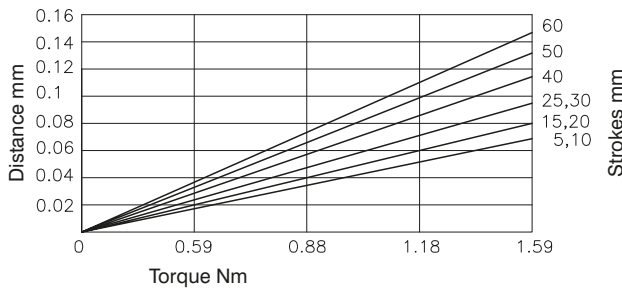

Ø20

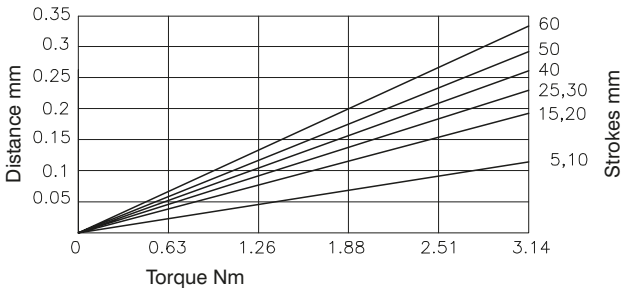





Ø20

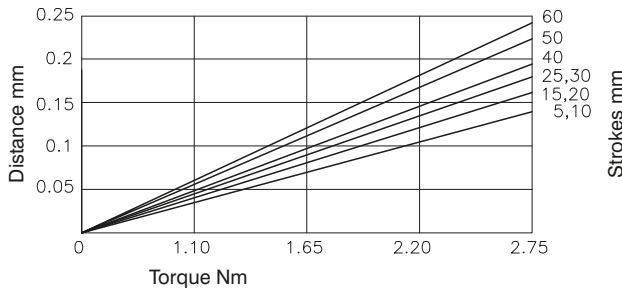

3 PNEUMATIC ACTUATION

Plate deflection graphs outer stroke - selection graphs

Plate deviation (compared to A) when the load is applied on the spot indicated with the arrow and the unit completely extended

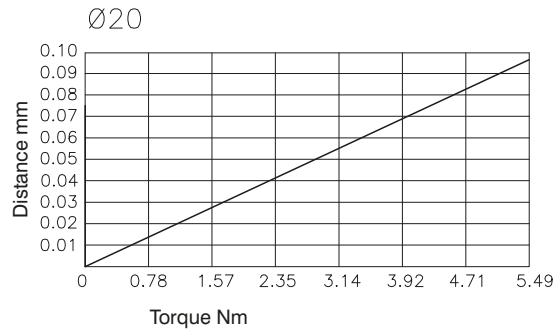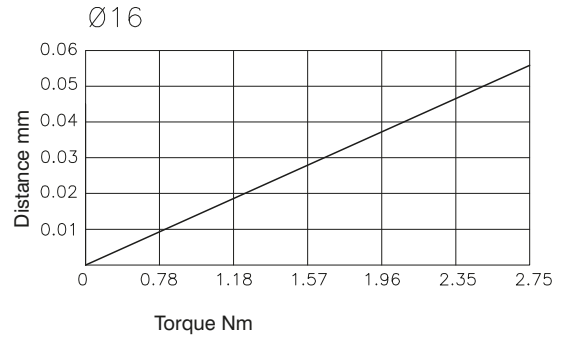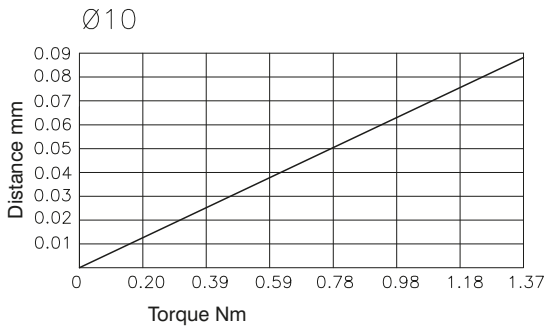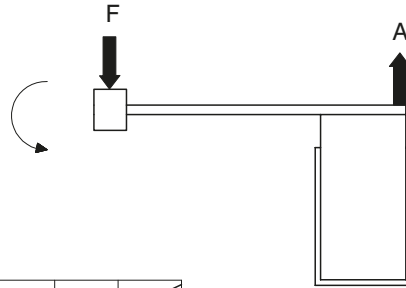


MOUNTING POSITION	VERTICAL			HORIZONTAL								
	100	200	300	100			200			300		
MAX. SPEED (mm/sec.)	100	200	300	50	100	200	50	100	200	50	100	200
Load eccentricity				50	100	200	50	100	200	50	100	200
Selection graphs	1	2	3	4	5	6	7	8	9	10	11	12

Selection graphs 1 - 3 (vertical mounting)


Drawing 1

Maximum speed 100 mm/s or lower

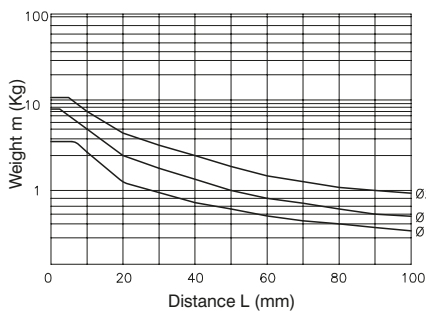


Drawing 2

Maximum speed 300 mm/s or lower

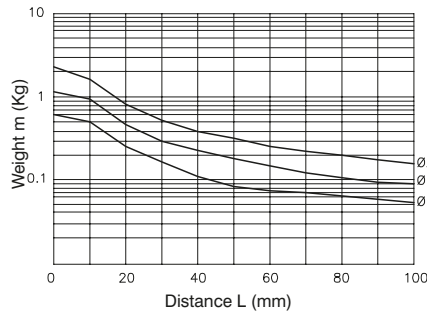

Drawing 3

Maximum speed 500 mm/s or lower

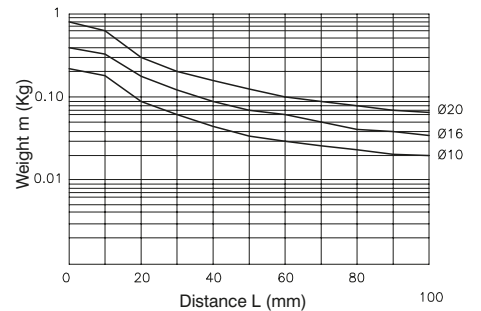





Selection graphs

Selection graphs 4 - 12 (horizontal mounting)


Drawing 4 load eccentricity 50mm
Maximum speed 100 mm/s or lower

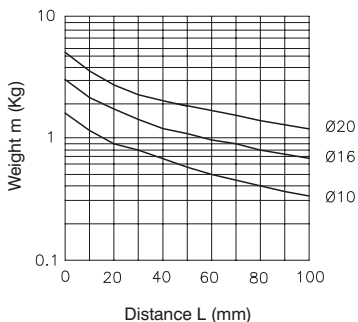


Drawing 7 load eccentricity 50mm
Maximum speed 300 mm/s or lower

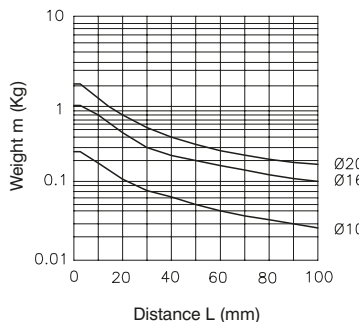


Drawing 10 load eccentricity 50mm
Maximum speed 500 mm/s or lower

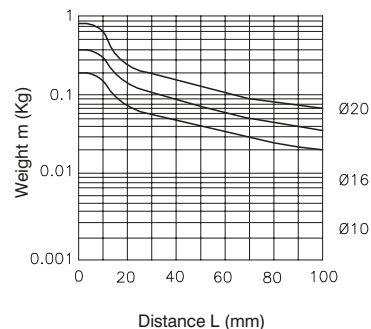


Drawing 5 load eccentricity 100mm
Maximum speed 100 mm/s or lower

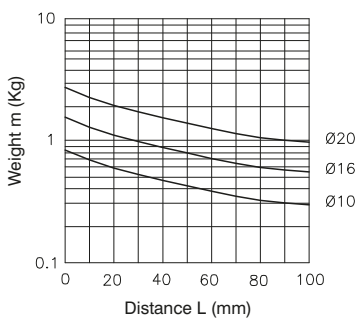


Drawing 8 load eccentricity 100mm
Maximum speed 300 mm/s or lower

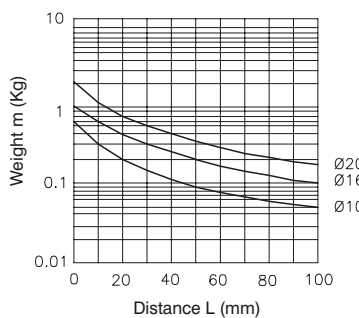


Drawing 11 load eccentricity 100mm
Maximum speed 500 mm/s or lower

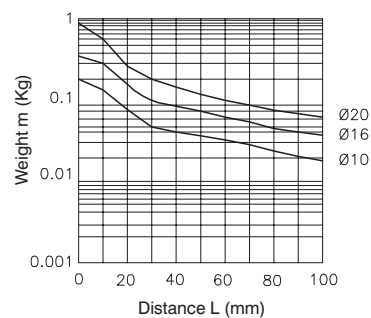


Drawing 6 load eccentricity 200mm
Maximum speed 100 mm/s or lower

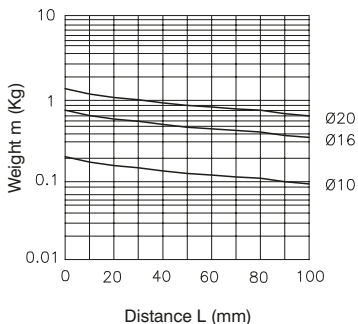

Drawing 9 load eccentricity 200mm
Maximum speed 300 mm/s or lower

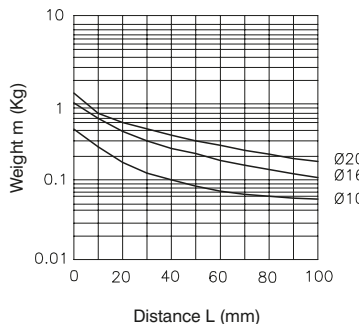

Drawing 12 load eccentricity 200mm
Maximum speed 500 mm/s or lower

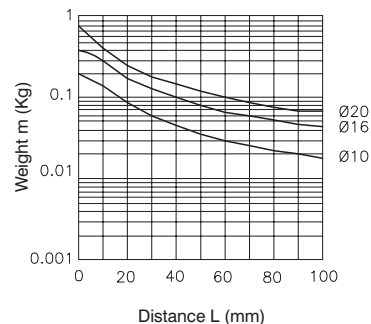

3 PNEUMATIC ACTUATION

